

LB1831M


Low-Saturation Bidirectional Motor Driver for Low-Voltage Applications


The LB1831M is a dual low-saturation bidirectional motor driver IC for use in low-voltage applications. It is especially suited for use in compact low-voltage motors in portable equipment such as printer, FDD, camera.

Features

- · Capable of being operated from a low voltage (2.5V min)
- · Low saturation voltage
- (Upper transistor + lower transistor residual voltage 1.0V max at 400mA)
- · Parallel connection available
- (Upper transistor + lower transistor residual voltage 0.5V max at 400mA)
- (Upper transistor + lower transistor residual voltage 1.0V max at 800mA)
- · Logic power supply and motor power supply are separate.
- · On-chip braking function
- · On-chip spark killer diodes
- · Possible to increase the internal allowable power dissipation because the package is compact (MFP-16FS) and heat can be radiated easily to the outside.

Absolute Maximum Ratings at	$Ta = 25^{\circ}C$			unit			
Maximum Supply Voltage	$ m V_{CC}$ max		-0.3 to +10	V			
	V_S max		-0.3 to +10	V			
Output Supply Voltage	$V_{ m OUT}$		$V_S + V_{SF}$	V			
Input Supply Voltage	V_{IN}		-0.3 to +10	v			
GND Pin Flow-out Current	I_{GND}	Per channel	1.0	Á			
Allowable Power Dissipation	Pd max1	IC only	900	mW			
	Pd max2	Mounted on specified board	1200	mW			
		$(20\times30\times1.5\text{mm}^3\text{ glass epoxy})$					
Operating Temperature	Topr		-20 to +75	°C			
Storage Temperature	Tstg		-40 to + 125	°C			
Allowable Operating Conditions at Ta = 25°C							
Supply Voltage	V_{CC}		2.5 to 9.0	V			
	v_s		1.8 to 9.0	v			
Input 'H'-Level Voltage	V_{IH}	•	1.8 to 9.0	v			
Input 'L'-Level Voltage	V_{IL}		-0.3 to +0.7	v			

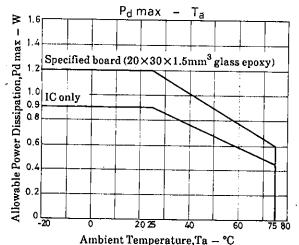

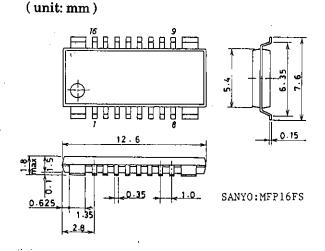

3097

Package Dimensions


Ta = 25°C,	$V_{CC} = 3V$	min	typ	max	unit
I_{CC}	$V_{IN}1,2,3,4=0V,I_{CC}+I_{S}$		0.1	10	μΑ
$I_{CC}1$	$V_{IN}1 = 3V, V_{IN}2, 3, 4 = 0V, I_{CC} + I_{S}$		10	18	mΑ
$I_{CC}2$	$V_{IN}1,2=3V,V_{IN}3,4=0V,I_{CC}+I_{S}$		20	35	mΑ
$V_{\rm OUT}1$	$I_{OUT} = 200 \text{mA}$		0.35	0.50	V.
$V_{OUT}2$	$I_{OUT} = 400 mA$		0.75	1.0	V
$V_{ m OUT}3$	I _{OUT} =400mA,parallel connection		0.4	0.55	V
$V_{OUT}4$	I _{OUT} =800mA,parallel connection		0.8	1.1	V
$V_{O(sus)}$	$I_{OUT} = 400 mA$	9			V
I_{IN}	$V_{IN} = 2V, V_{CC} = 6V$			80	μA
					_
I _S (leak)	$V_{\rm CC}$ 1,2=9 V			30	μA
V_{SF}	$I_{OUT} = 500 \text{mA}$			1.7	V
	I _{CC} I _{CC} I _{CC} I _{CC} V _{OUT} V _{OUT} V _{OUT} V _{OUT} V _{O(sus)} I _{IN} I _S (leak)	$\begin{array}{lll} I_{CC1} & V_{IN}1 = 3V, V_{IN}2, 3, 4 = 0V, I_{CC} + I_{S} \\ I_{CC2} & V_{IN}1, 2 = 3V, V_{IN}3, 4 = 0V, I_{CC} + I_{S} \\ V_{OUT1} & I_{OUT} = 200 \text{mA} \\ V_{OUT2} & I_{OUT} = 400 \text{mA}, \text{parallel connection} \\ V_{OUT3} & I_{OUT} = 400 \text{mA}, \text{parallel connection} \\ V_{OUT4} & I_{OUT} = 800 \text{mA}, \text{parallel connection} \\ V_{O(\text{sus})} & I_{OUT} = 400 \text{mA} \\ I_{IN} & V_{IN} = 2V, V_{CC} = 6V \\ \\ I_{S} \text{ (leak)} & V_{CC}1, 2 = 9V \\ \end{array}$	$\begin{array}{llll} I_{CC} & V_{IN}1,2,3,4=0 V,I_{CC}+I_{S} \\ I_{CC}1 & V_{IN}1=3 V,V_{IN}2,3,4=0 V,I_{CC}+I_{S} \\ I_{CC}2 & V_{IN}1,2=3 V,V_{IN}3,4=0 V,I_{CC}+I_{S} \\ V_{OUT}1 & I_{OUT}=200 \text{mA} \\ V_{OUT}2 & I_{OUT}=400 \text{mA} \\ V_{OUT}3 & I_{OUT}=400 \text{mA}, \text{parallel connection} \\ V_{OUT}4 & I_{OUT}=800 \text{mA}, \text{parallel connection} \\ V_{O(\text{sus})} & I_{OUT}=400 \text{mA} \\ I_{IN} & V_{IN}=2 V,V_{CC}=6 V \\ \\ I_{S} (\text{leak}) & V_{CC}1,2=9 V \\ \end{array}$	$\begin{array}{llllllllllllllllllllllllllllllllllll$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

Truth Table


IN 1/3	IN 2/4	OUT 1/3	OUT 2/4	Mode
Н	L	Н	L	Forward
L	H	L	Н	Reverse
Н	H	L	L	Brake
L	L	OFF	OFF	Standby

Equivalent Circuit Block Diagram

Unit (resistance: Ω , capacitance: F)

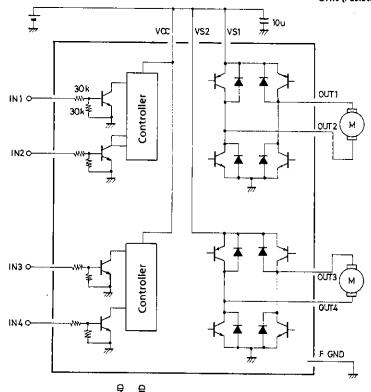

Pin Assignment

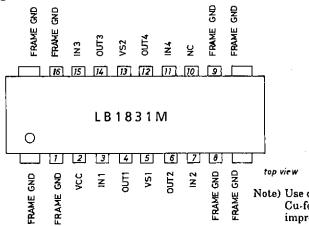

Note) Use one of the FRAME-GND pins for grounding. When the Cu-foild side is soldered, heat radiation can be more improved.

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - 2 Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.