
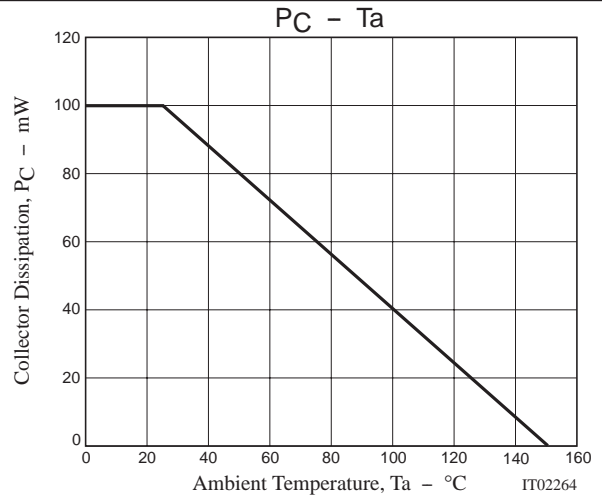


2SC5646

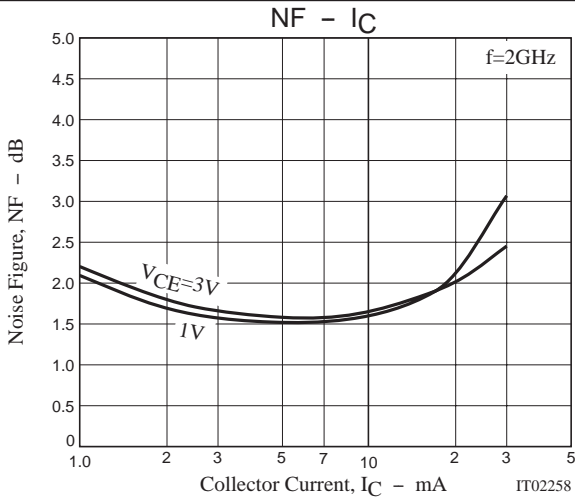

S Parameters (Common emitter)

VCE=1V, IC=1mA, ZO=50Ω

Freq(MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
200	0.966	-14.5	3.235	165.4	0.052	78.9	0.980	-11.5
400	0.929	-28.6	3.081	152.3	0.099	68.9	0.943	-22.3
600	0.874	-41.4	2.825	140.1	0.137	59.4	0.889	-32.3
800	0.820	-53.1	2.657	129.4	0.168	51.9	0.835	-40.7
1000	0.778	-63.3	2.504	118.4	0.189	45.8	0.796	-47.7
1200	0.713	-72.3	2.281	110.8	0.207	40.4	0.743	-54.0
1400	0.674	-80.2	2.155	102.8	0.216	36.0	0.717	-58.9
1600	0.636	-87.8	2.005	94.8	0.225	32.8	0.693	-63.8
1800	0.599	-94.8	1.853	88.3	0.232	29.8	0.660	-68.6
2000	0.568	-101.0	1.732	82.6	0.236	27.4	0.640	-72.7
2200	0.542	-107.1	1.630	77.2	0.240	25.6	0.624	-76.3
2400	0.522	-113.2	1.553	72.0	0.243	23.5	0.616	-80.5
2600	0.511	-121.0	1.488	67.3	0.238	21.9	0.589	-83.7
2800	0.470	-127.1	1.403	62.6	0.237	21.3	0.573	-86.1
3000	0.448	-132.7	1.340	58.9	0.235	21.4	0.561	-87.8

VCE=1V, IC=5mA, ZO=50Ω

Freq(MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
200	0.832	-34.2	11.473	151.5	0.044	70.2	0.891	-24.8
400	0.696	-60.9	9.543	130.5	0.072	57.2	0.738	-42.0
600	0.558	-79.8	7.440	117.4	0.088	48.9	0.598	-51.8
800	0.488	-96.6	6.103	107.7	0.099	45.7	0.520	-59.7
1000	0.455	-109.2	5.244	97.8	0.109	45.0	0.464	-66.3
1200	0.415	-120.0	4.520	90.8	0.117	45.0	0.427	-70.0
1400	0.390	-129.5	3.950	85.1	0.124	45.2	0.405	-73.4
1600	0.375	-136.9	3.524	80.2	0.132	45.8	0.384	-76.2
1800	0.358	-143.7	3.145	75.7	0.140	46.2	0.371	-78.3
2000	0.351	-149.1	2.896	71.2	0.149	46.4	0.365	-80.8
2200	0.344	-154.9	2.649	66.9	0.158	47.0	0.364	-82.2
2400	0.340	-159.4	2.468	63.0	0.166	47.1	0.366	-86.0
2600	0.339	-163.9	2.299	59.1	0.174	48.1	0.350	-85.7
2800	0.335	-167.8	2.162	55.5	0.185	48.5	0.361	-85.0
3000	0.339	-171.6	2.043	52.0	0.196	49.1	0.388	-84.0

2SC5646

$V_{CE}=1V, I_C=10mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.712	-50.0	16.218	141.2	0.040	64.6	0.796	-33.0
400	0.556	-82.8	11.575	119.9	0.060	54.0	0.594	-50.6
600	0.444	-104.0	8.470	108.8	0.071	49.9	0.465	-58.3
800	0.401	-120.1	6.729	99.1	0.082	49.9	0.394	-64.8
1000	0.385	-132.9	5.619	90.8	0.091	51.3	0.357	-69.7
1200	0.367	-141.8	4.775	85.2	0.100	52.4	0.330	-72.6
1400	0.357	-149.8	4.137	80.1	0.112	53.3	0.313	-75.4
1600	0.351	-156.4	3.674	75.5	0.121	54.1	0.305	-77.5
1800	0.344	-161.7	3.283	71.7	0.132	54.2	0.300	-79.7
2000	0.341	-166.5	2.985	67.9	0.142	54.5	0.300	-81.0
2200	0.339	-170.7	2.740	63.8	0.153	54.8	0.306	-83.0
2400	0.339	-174.6	2.532	60.2	0.165	54.8	0.308	-86.3
2600	0.338	-178.0	2.365	56.7	0.176	54.8	0.302	-86.2
2800	0.340	178.6	2.214	53.3	0.187	54.9	0.310	-84.5
3000	0.340	175.5	2.090	50.0	0.201	54.8	0.347	-83.5

$V_{CE}=1V, I_C=20mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.566	-75.5	17.073	129.2	0.036	57.9	0.632	-41.0
400	0.459	-113.6	10.744	108.8	0.050	52.6	0.433	-55.0
600	0.406	-134.0	7.486	100.0	0.061	51.6	0.342	-59.3
800	0.392	-147.0	5.766	91.5	0.072	54.2	0.298	-63.8
1000	0.395	-156.6	4.755	84.1	0.082	57.0	0.280	-67.4
1200	0.390	-163.3	4.019	78.9	0.093	58.6	0.270	-69.8
1400	0.389	-169.0	3.464	74.2	0.104	59.4	0.266	-72.5
1600	0.389	-173.9	3.058	69.9	0.115	60.2	0.268	-75.0
1800	0.385	-177.8	2.731	66.3	0.128	60.0	0.272	-77.6
2000	0.386	178.7	2.481	62.5	0.140	60.0	0.277	-79.6
2200	0.386	175.4	2.274	58.7	0.152	60.4	0.288	-82.0
2400	0.387	172.3	2.103	55.1	0.164	59.8	0.296	-85.7
2600	0.386	169.5	1.958	51.7	0.177	60.1	0.293	-86.1
2800	0.388	166.9	1.837	48.3	0.190	59.5	0.305	-85.2
3000	0.389	164.3	1.730	45.1	0.206	59.0	0.342	-84.3

$V_{CE}=3V, I_C=1mA, Z_O=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.970	-13.3	3.318	166.5	0.046	79.3	0.983	-10.3
400	0.938	-26.2	3.140	154.1	0.087	70.0	0.952	-20.1
600	0.885	-37.8	2.901	142.4	0.122	61.6	0.905	-29.2
800	0.838	-48.6	2.719	132.2	0.150	54.5	0.859	-37.0
1000	0.793	-58.7	2.557	121.9	0.171	48.5	0.820	-43.9
1200	0.736	-66.7	2.320	114.2	0.188	43.6	0.774	-49.6
1400	0.703	-74.4	2.242	106.3	0.199	39.0	0.747	-54.4
1600	0.658	-81.8	2.115	98.4	0.208	35.7	0.719	-59.4
1800	0.614	-89.0	1.938	91.7	0.213	32.8	0.694	-63.8
2000	0.580	-94.8	1.813	86.0	0.217	30.7	0.672	-67.8
2200	0.551	-100.5	1.707	80.6	0.220	29.1	0.655	-71.4
2400	0.531	-106.5	1.630	75.4	0.225	27.1	0.647	-75.5
2600	0.518	-114.0	1.563	70.7	0.222	25.6	0.618	-78.6
2800	0.476	-119.8	1.473	65.8	0.222	25.1	0.603	-81.1
3000	0.452	-125.2	1.408	62.1	0.221	25.3	0.590	-82.7

2SC5646

$V_{CE}=3V, I_C=5mA, Z_0=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.854	-29.8	11.793	153.4	0.039	71.9	0.907	-22.1
400	0.719	-55.0	9.801	133.9	0.066	59.9	0.770	-37.9
600	0.574	-72.8	7.799	121.1	0.082	51.9	0.641	-47.3
800	0.514	-86.9	6.563	110.0	0.093	48.3	0.557	-54.1
1000	0.458	-100.6	5.612	100.8	0.103	47.3	0.501	-60.5
1200	0.421	-110.4	4.876	93.8	0.111	47.0	0.461	-64.3
1400	0.388	-119.5	4.298	87.7	0.119	47.0	0.433	-67.7
1600	0.364	-127.4	3.841	82.7	0.125	47.6	0.415	-69.8
1800	0.346	-134.9	3.440	78.5	0.134	47.6	0.399	-72.2
2000	0.335	-139.3	3.148	73.7	0.142	48.0	0.390	-73.9
2200	0.328	-146.3	2.889	69.9	0.150	48.8	0.390	-76.0
2400	0.319	-150.3	2.694	65.4	0.158	49.0	0.386	-79.2
2600	0.319	-155.7	2.500	62.0	0.166	49.9	0.376	-79.1
2800	0.313	-159.5	2.365	58.2	0.175	50.1	0.381	-78.3
3000	0.314	-163.8	2.218	54.8	0.187	51.2	0.417	-77.8

$V_{CE}=3V, I_C=10mA, Z_0=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.746	-42.4	16.884	145.0	0.036	67.2	0.837	-28.8
400	0.584	-72.2	12.609	123.6	0.056	57.1	0.649	-45.4
600	0.460	-91.8	9.390	112.1	0.068	52.3	0.515	-53.0
800	0.398	-107.4	7.534	102.6	0.078	51.9	0.437	-59.3
1000	0.371	-120.9	6.340	94.0	0.087	53.1	0.394	-64.0
1200	0.346	-130.4	5.393	88.2	0.097	53.8	0.365	-66.5
1400	0.331	-138.4	4.681	83.2	0.106	54.5	0.344	-69.1
1600	0.320	-145.5	4.166	78.7	0.116	55.3	0.331	-71.0
1800	0.310	-151.6	3.720	74.9	0.126	55.3	0.325	-73.0
2000	0.307	-157.1	3.388	71.0	0.136	55.9	0.323	-74.2
2200	0.301	-161.7	3.110	67.1	0.146	56.2	0.326	-76.1
2400	0.302	-165.9	2.877	63.5	0.157	55.9	0.326	-79.2
2600	0.299	-169.6	2.684	60.0	0.167	56.3	0.318	-78.8
2800	0.300	-173.1	2.513	56.8	0.178	56.5	0.329	-77.3
3000	0.300	-176.5	2.374	53.5	0.192	56.4	0.367	-76.7

$V_{CE}=3V, I_C=20mA, Z_0=50\Omega$

Freq(MHz)	$ S_{11} $	$\angle S_{11}$	$ S_{21} $	$\angle S_{21}$	$ S_{12} $	$\angle S_{12}$	$ S_{22} $	$\angle S_{22}$
200	0.621	-57.1	20.374	136.5	0.032	63.7	0.744	-34.4
400	0.471	-91.2	13.710	115.3	0.047	56.4	0.537	-49.1
600	0.379	-111.9	9.792	105.5	0.058	54.8	0.422	-54.1
800	0.350	-127.4	7.674	97.1	0.068	56.5	0.363	-58.3
1000	0.338	-139.0	6.356	89.3	0.079	58.5	0.331	-61.6
1200	0.327	-147.7	5.374	84.0	0.089	59.8	0.312	-63.6
1400	0.321	-154.9	4.646	79.4	0.100	60.5	0.302	-65.6
1600	0.317	-160.5	4.119	75.4	0.110	61.1	0.296	-67.5
1800	0.313	-165.4	3.670	71.8	0.122	60.8	0.295	-69.4
2000	0.311	-169.9	3.336	68.1	0.133	61.1	0.298	-70.9
2200	0.311	-173.6	3.060	64.5	0.144	61.2	0.305	-72.8
2400	0.312	-177.3	2.826	61.0	0.156	60.7	0.308	-76.3
2600	0.312	-179.9	2.633	57.7	0.168	60.6	0.303	-75.8
2800	0.313	176.7	2.464	54.5	0.180	60.6	0.318	-74.6
3000	0.315	174.3	2.325	51.4	0.193	60.1	0.357	-74.3

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 2000. Specifications and information herein are subject to change without notice.