




Product Description

The Stanford Microdevices' SRM-1016 is a high linearity active mixer for use in a wide variety of communication systems covering the 800-1000 MHz frequency bands. This device operates from a single 5V supply and provides 10dB of conversion gain while requiring only 0dBm input to the integrated LO driver. The SRM-1016 also includes an integrated on chip IF amplifier and is fabricated using silicon germanium device technology.

The SRM-1016 incorporates internal matching on each RF, IF, and LO port to enhance ease of use and to reduce the number of external components required. The RF and LO ports can be driven differentially or single ended. Each broadband port has been designed to minimize performance degradation while operating into highly reactive components such as SAW filters.

Functional Block Diagram

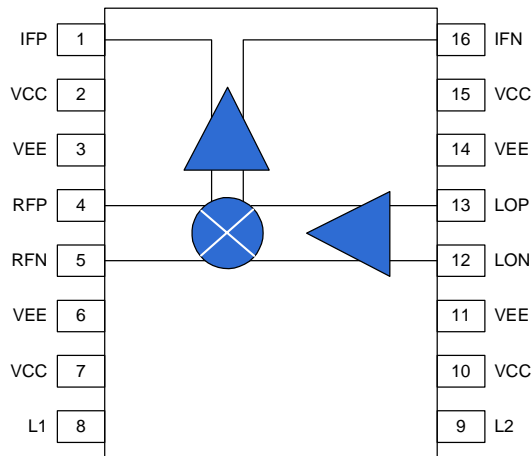

Key Specifications

| Parameters | Test Conditions ($V_{CC}=5.0V$, $I=150mA$, $T=25^{\circ}C$) | Unit | Min. | Typ. | Max. |
|--------------------|---|------|------|------|------|
| Frequency Range | | MHz | 800 | | 1000 |
| IF Frequency Range | | MHz | 10 | 200 | 300 |
| Input IP3 | RF1 = RF2 = -17 dBm/tone | dBm | | +20 | |
| Input P1dB | | dBm | | +5 | |
| Conversion Gain | | dB | | 10 | |
| SSB Noise Figure | | dB | | 15 | |

The information provided herein is believed to be reliable at press time. Stanford Microdevices assumes no responsibility for inaccuracies or omissions. Stanford Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Stanford Microdevices does not authorize or warrant any Stanford Microdevices product for use in life-support devices and/or systems.

Copyright 2000 Stanford Microdevices, Inc. All worldwide rights reserved.

522 Almanor Ave., Sunnyvale, CA 94086

Phone: (800) SMI-MMIC

<http://www.stanfordmicro.com>

SRM-1016

800 - 1000 MHz High Linearity
Silicon Germanium
Active Receive Mixer



16 pin TSSOP with Exposed Pad
Package Body: 0.20 x 0.17 x 0.04 (inches)
5.0 x 4.4 x 1.0 (mm)

Product Features

- Active mixer with conversion gain
- No need for separate external LO driver
- Low LO drive level required to drive mixer
- RF and LO ports may be driven differentially
- Single supply operation (+5V)
- Broadband resistive 50Ω impedances on all three ports

Applications

- Digital and spread spectrum communication systems
- 800-1000 MHz transceivers for base station infrastructure equipment



Absolute Maximum Ratings

| Parameters | Value | Unit |
|-----------------------|-------------|-----------------|
| Supply Voltage | +6.0 | V _{DC} |
| LO Input | +10 | dBm |
| RF Input | +15 | dBm |
| Operating Temperature | -40 to +85 | °C |
| Storage Temperature | -65 to +150 | °C |

Test Conditions

| | |
|----------|-------------------|
| VCC | +5.0V |
| TA | +25°C |
| RF Input | -20 dBm @ 900 MHz |
| LO Input | 0.7 dBm @ 700 MHz |

Product Specifications – AC Performance

| Parameters | Additional Test Conditions | Unit | Min. | Typ. | Max. |
|--------------------|----------------------------|------|------|------|------|
| Frequency Range | | MHz | 800 | | 1000 |
| IF Frequency Range | | MHz | 10 | 200 | 300 |
| Input IP3 | RF1 = RF2 = -17 dBm/tone | dBm | | +20 | |
| Input P1dB | | dBm | | +5 | |
| Conversion Gain | | dB | | 10 | |
| SSB Noise figure | | dB | | 15 | |
| RF Return Loss | | dB | | 14 | |
| LO Return Loss | | dB | | 14 | |
| IF Return Loss | | dB | | 14 | |
| LO Drive | | dBm | -3 | 0 | +3 |

Product Specifications – Isolation Performance

| Parameters | Additional Test Conditions | Unit | Min. | Typ. | Max. |
|-----------------|----------------------------|------|------|------|------|
| Leakage (LO-RF) | | dBm | | -40 | |
| Leakage (LO-IF) | | dBm | | -26 | |

Product Specifications – Miscellaneous

| Parameters | Additional Test Conditions | Unit | Min. | Typ. | Max. |
|--------------------|----------------------------|------|-------|------|-------|
| Supply Voltage | | V | +4.75 | +5.0 | +5.25 |
| Supply Current | | mA | | 150 | |
| Thermal Resistance | | °C/W | | TBD | |





The information provided herein is believed to be reliable at press time. Stanford Microdevices assumes no responsibility for inaccuracies or omissions. Stanford Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Stanford Microdevices does not authorize or warrant any Stanford Microdevices product for use in life-support devices and/or systems.

Copyright 2000 Stanford Microdevices, Inc. All worldwide rights reserved.
522 Almanor Ave., Sunnyvale, CA 94086

Phone: (800) SMI-MMIC

<http://www.stanfordmicro.com>
05/01/01 rev 5.0

Typical Device Performance

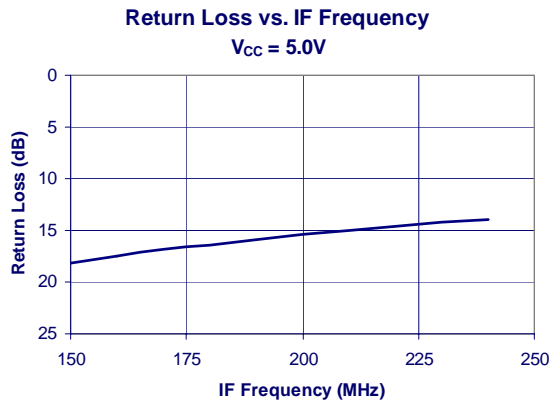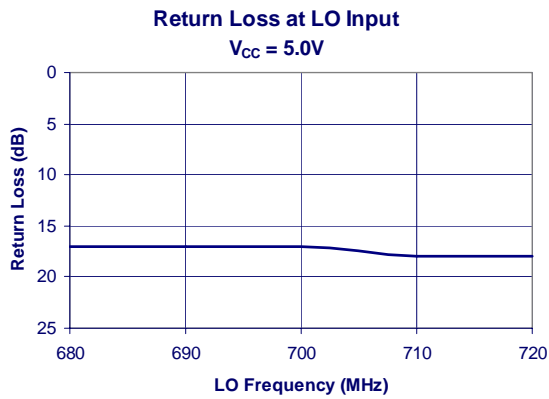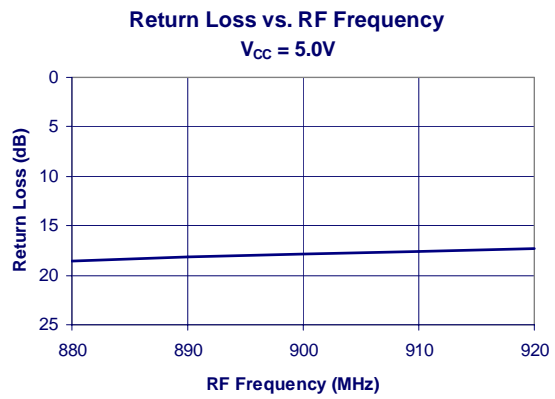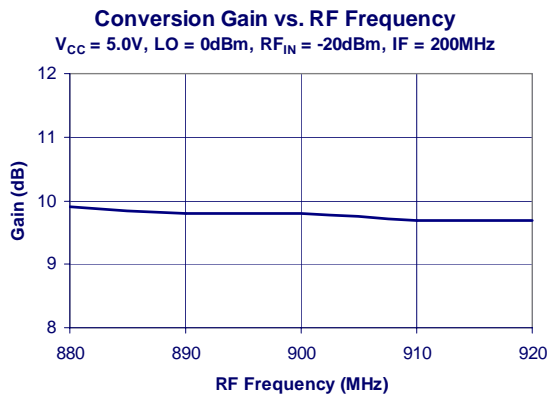



Pin Out Description

| Pin # | Function | Description | Additional Comments |
|-------|----------|------------------------------|---|
| 1 | IFP | IF output, positive terminal | Nominal DC voltage is 1.6V. Output should be AC-coupled |
| 2 | VCC | Positive supply (+5V) | |
| 3 | VEE | Ground | |
| 4 | RFP | RF input, positive terminal | Nominal DC voltage is 2.1V. (Internally biased) Input should be AC-coupled. |
| 5 | RFN | RF input, negative terminal | Nominal DC voltage is 2.1V. (Internally biased) Input should be AC-coupled. |
| 6 | VEE | Ground | |
| 7 | VCC | Positive supply (+5V) | |
| 8 | L1 | External inductor terminal | Nominal DC voltage is 5V, provided through off chip inductors. |
| 9 | L2 | External inductor terminal | Nominal DC voltage is 5V, provided through off chip inductors. |
| 10 | VCC | Positive supply (+5V) | |
| 11 | VEE | Ground | |
| 12 | LON | LO input, negative terminal | Nominal DC voltage is 2.4V. (Internally biased) Input should be AC-coupled. |
| 13 | LOP | LO input, positive terminal | Nominal DC voltage is 2.4V. (Internally biased) Input should be AC-coupled. |
| 14 | VEE | Ground | |
| 15 | VCC | Positive supply (+5V) | |
| 16 | IFN | IF output, negative terminal | Nominal DC voltage is 1.6V. Output should be AC-coupled. |

Advanced Data Sheet
SRM-1016 800-1000 MHz Receive Mixer



Caution: ESD Sensitive
 Appropriate precaution in handling, packaging and testing devices must be observed.



Part Number Ordering Information

| Part Number | Reel Size | Devices/Reel |
|-------------|-----------|--------------|
| SRM-1016 | TBD | TBD |

Part Symbolization

The part will be symbolized with a "TBD" marking designator on the top surface of the package.


Package Dimensions ("16" Package)

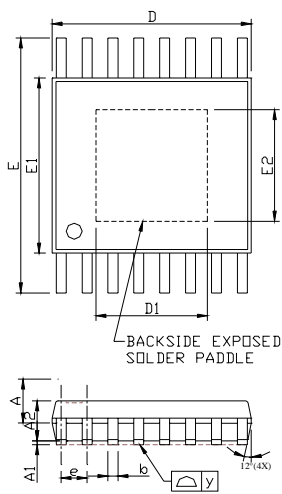

- NOTE
1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH PROTRUSIONS OR GATE BURRS
 2. TOLERANCE ± 0.1 mm UNLESS OTHERWISE SPECIFIED
 3. COPLANARITY : 0.1 mm
 4. CONTROLLING DIMENSION IS MILLIMETER. CONVERTED INCH DIMENSIONS ARE NOT NECESSARILY EXACT.
 5. FOLLOWED FROM JEDEC MO-153


| SYMBOLS | DIMENSIONS IN MILLIMETERS | | | DIMENSIONS IN INCHES | | |
|----------|---------------------------|------|------|----------------------|-------|-------|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | — | — | 1.15 | — | — | 0.045 |
| A1 | 0.00 | — | 0.10 | 0.000 | — | 0.004 |
| A2 | 0.80 | 1.00 | 1.05 | 0.031 | 0.039 | 0.041 |
| b | 0.19 | — | 0.30 | 0.007 | — | 0.012 |
| C | 0.09 | — | 0.20 | 0.004 | — | 0.008 |
| D | 4.90 | 5.00 | 5.10 | 0.193 | 0.197 | 0.201 |
| D1 | — | 2.80 | — | — | 0.110 | — |
| E | — | 6.40 | — | — | 0.252 | — |
| E1 | 4.30 | 4.40 | 4.50 | 0.169 | 0.173 | 0.177 |
| E2 | — | 2.80 | — | — | 0.110 | — |
| e | — | 0.65 | — | — | 0.026 | — |
| L | 0.45 | 0.60 | 0.75 | 0.018 | 0.024 | 0.030 |
| y | — | — | 0.10 | — | — | 0.004 |
| θ | 0° | — | 8° | 0° | — | 8° |

Test PCB Pad Layout

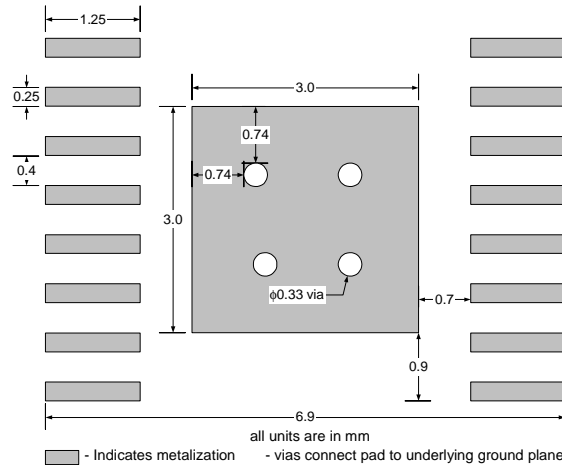

The information provided herein is believed to be reliable at press time. Stanford Microdevices assumes no responsibility for inaccuracies or omissions. Stanford Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Stanford Microdevices does not authorize or warrant any Stanford Microdevices product for use in life-support devices and/or systems. Copyright 2000 Stanford Microdevices, Inc. All worldwide rights reserved.

Demo Test Board Schematic

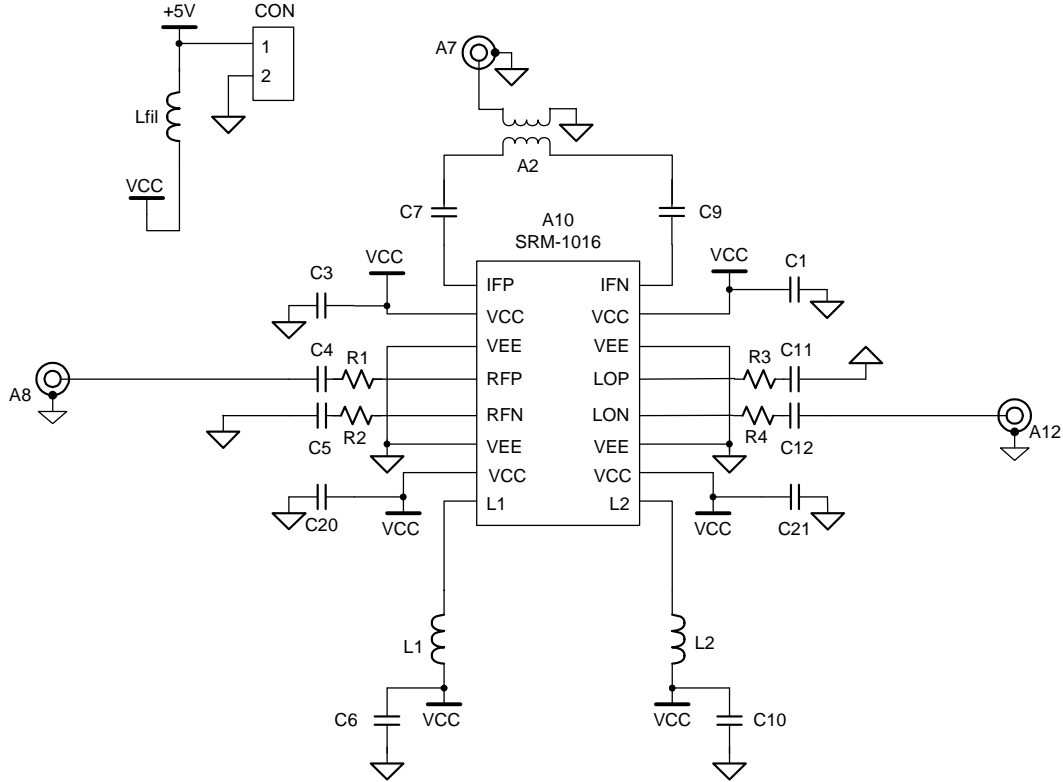

Bill of Materials

| Component Designator | Value | Qty | Vendor | Part Number | Description |
|----------------------|-------|-----|--------------------|--------------------|--|
| A10 | | 1 | SMDI | SRM-1016 | SiGe Receive Mixer |
| A7, A8, A12 | | 3 | Johnson Components | 142-0701-851 | SMA connector, end launch with tab, for 62 mil thick board |
| CON | | 1 | Digikey | S1212-36-ND | 2-pin header |
| A2 | 1:1 | 1 | Mini-Circuits | TC1-1 | IF transformer |
| Lfil | 1uH | 1 | Digikey | PCD1008CT-ND | Inductor, 1210 footprint, min. 200mA rating |
| C1, C3, C20, C21 | 27pF | 4 | Venkel | C0603COG500-270JNE | Capacitor, 0603 footprint |
| C6, C10 | 100pF | 2 | Venkel | C0603COG500-101JNE | Capacitor, 0603 footprint |
| C7, C9 | 120pF | 2 | Venkel | C0603COG500-121JNE | Capacitor, 0603 footprint |
| C4, C5 | 33pF | 2 | Venkel | C0805COG500-330JNE | Capacitor, 0603 footprint |
| C11, C12 | 39pF | 2 | Venkel | C0805COG500-390JNE | Capacitor, 0603 footprint |
| L1, L2 | 100nH | 2 | TOKO | LL1608-FSR10J | Inductor, 0603 footprint, high Q series |
| R1, R2, R3, R4 | 0 ohm | 4 | Venkel | CR0603-16W-000T | Resistor, 0603 footprint |


The information provided herein is believed to be reliable at press time. Stanford Microdevices assumes no responsibility for inaccuracies or omissions. Stanford Microdevices assumes no responsibility for the use of this information, and all such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. Stanford Microdevices does not authorize or warrant any Stanford Microdevices product for use in life-support devices and/or systems.

Copyright 2000 Stanford Microdevices, Inc. All worldwide rights reserved.
522 Almanor Ave., Sunnyvale, CA 94086

Phone: (800) SMI-MMIC
6

<http://www.stanfordmicro.com>
05/01/01 rev 5.0

**Demo Test Board
(Fully Assembled PCB)**

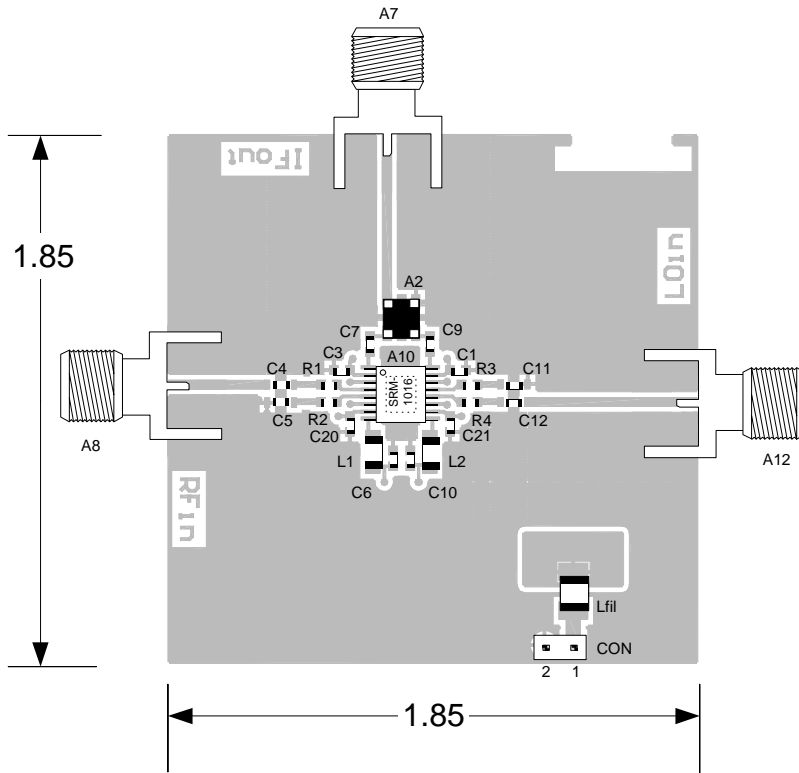

Note: Dimensions in inches
Standard test board set up for IF = 200MHz