



Certificate Number: Q10561

Certificate Number: E17276

FB40-FB380/C1500RG

FAST RECOVERY GLASS PASSIVATED BRIDGE RECTIFIERS


PRV : 100 - 900 Volts
Io : 1.5 Amperes

FEATURES :

- * Glass passivated chip
- * High case dielectric strength
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * Ideal for printed circuit board

MECHANICAL DATA :

- * Case : Reliable low cost construction utilizing molded plastic technique
- * Epoxy : UL94V-O rate flame retardant
- * Terminals : Plated leads solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Polarity symbols marked on case
- * Mounting position : Any
- * Weight : 1.29 grams

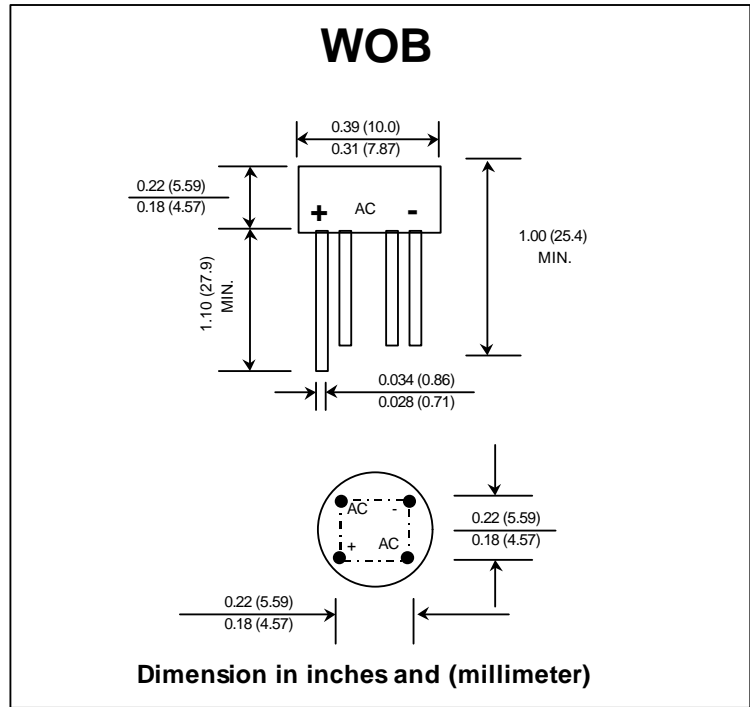

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.


RATING	SYMBOL	FB40-C 1500RG	FB80-C 1500RG	FB125-C 1500RG	FB250-C 1500RG	FB380-C 1500RG	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	100	200	300	600	900	Volts
Maximum RMS Input Voltage R+C -Load	V_{RMS}	40	80	125	250	380	Volts
Maximum DC Blocking Voltage	V_{DC}	100	200	300	600	900	Volts
Maximum Average Forward Current For Free Air Operation at $T_c = 45^\circ\text{C}$ R+L -Load C -Load	$I_{F(AV)}$	1.6 1.5					Amps.
Peak Forward Surge Current Single half sine wave on rated load (JEDEC Method) at $T_J = 125^\circ\text{C}$	I_{FSM}	30					Amps.
Rating for fusing at $T_J = 125^\circ\text{C}$ ($t < 100$ ms.)	I^2t	10					A ² S
Maximum Series Resistor C-Load $V_{RMS} = \pm 10\%$	R_t	1.0	2.0	4.0	8.0	12.0	Ω
Maximum load Capacitance + 50% -10%	C_L	5000	2500	1000	500	200	μF
Maximum Forward Voltage per Diode at $I_F = 1.5$ Amps.	V_F	1.4					Volts
Maximum Reverse Current at Rated Repetitive Peak Voltage per Diode	I_R	10					μA
Maximum Reverse Recovery Time (Note 1)	T_{rr}	150			250	500	ns
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	36					$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	- 50 to + 125					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	- 50 to + 150					$^\circ\text{C}$

Notes : 1) Measured with $I_F = 0.5$ Amp., $I_R = 1$ Amp., $I_{rr} = 0.25$ Amp.
 2) Thermal resistance from Junction to Ambient at 0.375" (9.5 mm) lead length P.C. Board with 0.22" x 0.22" (5.5 x 5.5 mm) copper Pads.

UPDATE : APRIL 23,1998

RATING AND CHARACTERISTIC CURVES (FB40 - FB380/C1500RG)

**FIG.1 - DERATING CURVE
FOR OUTPUT RECTIFIED CURRENT
FB40 C1500RG - FB125 C1500RG**

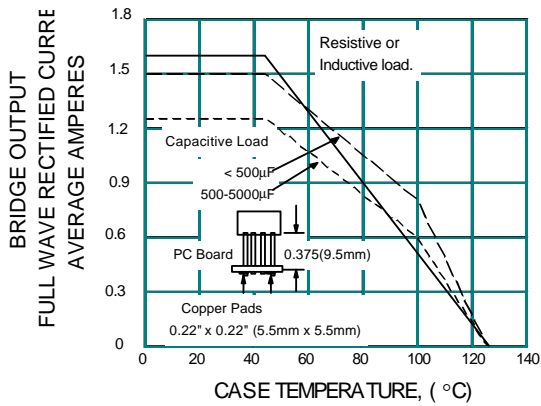

**FIG.1 - DERATING CURVE
FOR OUTPUT RECTIFIED CURRENT
FB250 C1500RG - FB380 C1500RG**

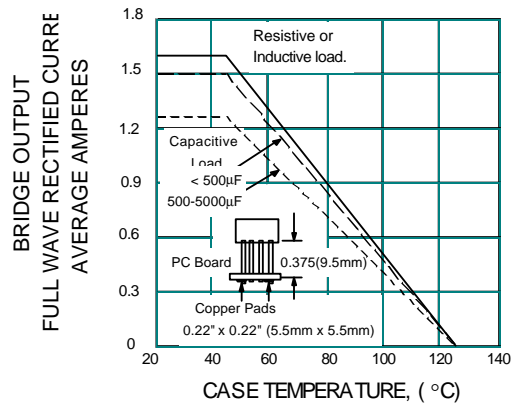


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

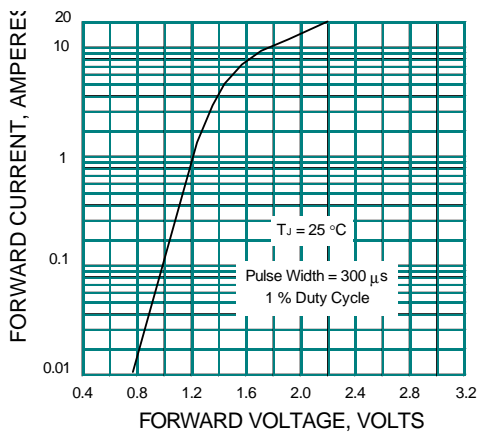


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

