

## 74LVXC3245

### 8-Bit Dual Supply Configurable Voltage Interface Transceiver with 3-STATE Outputs

#### General Description

The LVXC3245 is a 24-pin dual-supply, 8-bit configurable voltage interface transceiver suited for PCMCIA and other real time configurable I/O applications. The  $V_{CCA}$  pin accepts a 3V supply level. The A Port is a dedicated 3V port. The  $V_{CCB}$  pin accepts a 3V-to-5V supply level. The B Port is configured to track the  $V_{CCB}$  supply level respectively. A 5V level on the  $V_{CC}$  pin will configure the I/O pins at a 5V level and a 3V  $V_{CC}$  will configure the I/O pins at a 3V level. The A Port should interface with a 3V host system and the B Port to the card slots. This device will allow the  $V_{CCB}$  voltage source pin and I/O pins on the B Port to float when  $\overline{OE}$  is HIGH. This feature is necessary to buffer data to and from a PCMCIA socket that permits PCMCIA cards to be inserted and removed during normal operation.

#### Features


- Bidirectional interface between 3V and 3V-to-5V buses
- Control inputs compatible with TTL level
- Outputs source/sink up to 24 mA
- Guaranteed simultaneous switching noise level and dynamic threshold performance
- Implements patented EMI reduction circuitry
- Flexible  $V_{CCB}$  operating range
- Allows B Port and  $V_{CCB}$  to float simultaneously when  $\overline{OE}$  is HIGH
- Functionally compatible with the 74 series 245

#### Ordering Code:


Order Number	Package Number	Package Description
74LVXC3245WM	M24B	24-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
74LVXC3245QSC	MQA24	24-Lead Quarter Size Outline Package (QSOP), JEDEC MO-137, 0.150" Wide
74LVXC3245MTC	MTC24	24-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

#### Logic Symbol



#### Connection Diagram



#### Pin Descriptions


Pin Names	Description
$\overline{OE}$	Output Enable Input
T/R	Transmit/Receive Input
A <sub>0</sub> -A <sub>7</sub>	Side A Inputs or 3-STATE Outputs
B <sub>0</sub> -B <sub>7</sub>	Side B Inputs or 3-STATE Outputs

**Truth Table**

Inputs		Outputs
$\overline{OE}$	$T/\overline{R}$	
L	L	Bus B Data to Bus A
L	H	Bus A Data to Bus B
H	X	HIGH-Z State

H = HIGH Voltage Level  
 L = LOW Voltage Level  
 X = Immaterial

**Logic Diagram**

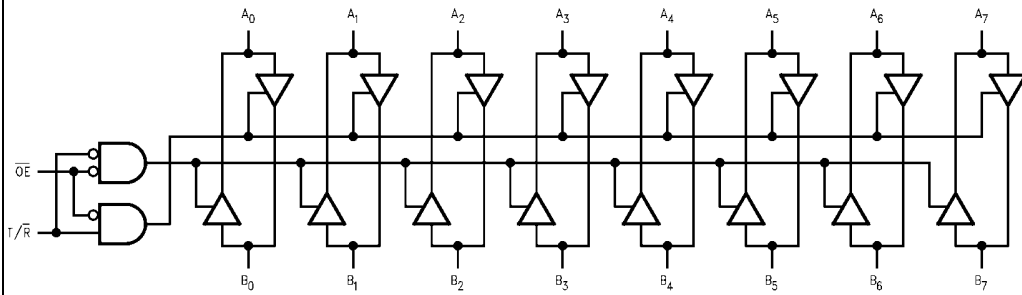

Symbol		Parameter	V <sub>CCA</sub> (V)	V <sub>CCB</sub> (V)	T <sub>A</sub> = 25°C		T <sub>A</sub> = -40°C to +85°C		Units	Conditions
					Typ	Guaranteed Limits				
V <sub>IHA</sub>	Minimum HIGH Level Input Voltage	A <sub>n</sub> , $\overline{OE}$	2.7	3.0		2.0	2.0	V	V <sub>OUT</sub> ≤ 0.1V or ≥ V <sub>CC</sub> - 0.1V	
		T/R	3.0	3.6		2.0	2.0			
			3.6	5.5		2.0	2.0			
V <sub>IHB</sub>		B <sub>n</sub>	2.7	3.0		2.0	2.0	V		
			3.0	3.6		2.0	2.0			
			3.6	5.5		3.85	3.85			
V <sub>ILA</sub>	Maximum LOW Level Input Voltage	A <sub>n</sub> , $\overline{OE}$	2.7	3.0		0.8	0.8	V	V <sub>OUT</sub> ≤ 0.1V or ≥ V <sub>CC</sub> - 0.1V	
		T/R	3.0	3.6		0.8	0.8			
			3.6	5.5		0.8	0.8			
V <sub>ILB</sub>		B <sub>n</sub>	2.7	3.0		0.8	0.8	V		
			3.0	3.6		0.8	0.8			
			3.6	5.5		1.65	1.65			
V <sub>OHA</sub>	Minimum HIGH Level Output Voltage		3.0	3.0	2.99	2.9	2.9	V	I <sub>OUT</sub> = -100 μA I <sub>OH</sub> = -12 mA I <sub>OH</sub> = -24 mA I <sub>OH</sub> = -12 mA I <sub>OH</sub> = -24 mA	
			3.0	3.0	2.85	2.56	2.46			
			3.0	3.0	2.65	2.35	2.25			
			2.7	3.0	2.5	2.3	2.2			
			2.7	4.5	2.3	2.1	2.0			
V <sub>OHB</sub>			3.0	3.0	2.99	2.9	2.9	V	I <sub>OUT</sub> = -100 μA I <sub>OH</sub> = -12 mA I <sub>OH</sub> = -24 mA I <sub>OH</sub> = -24 mA	
			3.0	3.0	2.85	2.56	2.46			
			3.0	3.0	2.65	2.35	2.25			
			3.0	4.5	4.25	3.86	3.76			
V <sub>OLA</sub>	Maximum LOW Level Output Voltage		3.0	3.0	0.002	0.1	0.1	V	I <sub>OUT</sub> = 100 μA I <sub>OL</sub> = 24 mA I <sub>OL</sub> = 12 mA I <sub>OL</sub> = 24 mA	
			3.0	3.0	0.21	0.36	0.44			
			2.7	3.0	0.11	0.36	0.44			
			2.7	4.5	0.22	0.42	0.5			
V <sub>OLB</sub>			3.0	3.0	0.002	0.1	0.1	V	I <sub>OUT</sub> = 100 μA I <sub>OL</sub> = 24 mA I <sub>OL</sub> = 24 mA	
			3.0	3.0	0.21	0.36	0.44			
			3.0	4.5	0.18	0.36	0.44			
I <sub>IN</sub>	Maximum Input Leakage Current @ $\overline{OE}$ , T/R		3.6	3.6		±0.1	±1.0	μA	V <sub>I</sub> = V <sub>CCA</sub> , GND	
			3.6	5.5		±0.1	±1.0			

Absolute Maximum Ratings (Note 1)	
Supply Voltage (V <sub>CCA</sub> , V <sub>CCB</sub> )	-0.5V to +7.0V
DC Input Voltage (V <sub>I</sub> ) @ $\overline{OE}$ , T/R	-0.5V to V <sub>CCA</sub> +0.5V
DC Input/Output Voltage (V <sub>I/O</sub> ) @ A <sub>n</sub>	-0.5V to V <sub>CCA</sub> +0.5V
@ B <sub>n</sub>	-0.5V to V <sub>CCB</sub> +0.5V
DC Input Diode Current (I <sub>IK</sub> ) @ $\overline{OE}$ , T/R	±20 mA
DC Output Diode (I <sub>OK</sub> ) Current	±50 mA
DC Output Source or Sink Current (I <sub>O</sub> )	±50 mA
DC V <sub>CC</sub> or Ground Current per Output Pin (I <sub>CC</sub> or I <sub>GND</sub> ) and Max Current	±50 mA ±200 mA
Storage Temperature Range (T <sub>STG</sub> )	-65°C to +150°C
DC Latch-Up Source or Sink Current	±300 mA

Recommended Operating Conditions (Note 2)	
Supply Voltage	V <sub>CCA</sub> 2.7V to 3.6V V <sub>CCB</sub> 3.0V to 5.5V
Input Voltage (V <sub>I</sub> ) @ $\overline{OE}$ , T/R	0V to V <sub>CCA</sub>
Input Output Voltage (V <sub>I/O</sub> ) @ A <sub>n</sub>	0V to V <sub>CCA</sub>
@ B <sub>n</sub>	0V to V <sub>CCB</sub>
Free Air Operating Temperature (T <sub>A</sub> )	-40°C to +85°C
Minimum Input Edge Rate (ΔV/Δt)	8 ns/V
	V <sub>IN</sub> from 30% to 70% of V <sub>CC</sub> V <sub>CC</sub> @ 3.0V, 4.5V, 5.5V

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:** The A Port unused pins (inputs or I/Os) must be held HIGH or LOW. They may not float.

## DC Electrical Characteristics

DC Electrical Characteristics (Continued)									
Symbol	Parameter	V <sub>CCA</sub> (V)	V <sub>CCB</sub> (V)	T <sub>A</sub> = 25°C		T <sub>A</sub> = -40°C to +85°C		Units	Conditions
				Typ	Guaranteed Limits	Typ	Guaranteed Limits		
I <sub>OZA</sub>	Maximum 3-STATE Output Leakage @ A <sub>n</sub>	3.6	3.6		±0.5	±5.0		μA	V <sub>I</sub> = V <sub>IL</sub> , V <sub>IH</sub> , OE = V <sub>CCA</sub> , V <sub>O</sub> = V <sub>CCA</sub> , GND
		3.6	5.5		±0.5	±5.0			
I <sub>OZB</sub>	Maximum 3-STATE Output Leakage @ B <sub>n</sub>	3.6	3.6		±0.5	±5.0		μA	V <sub>I</sub> = V <sub>IL</sub> , V <sub>IH</sub> , OE = V <sub>CCA</sub> , V <sub>O</sub> = V <sub>CCB</sub> , GND
		3.6	5.5		±0.5	±5.0			
ΔI <sub>CC</sub>	Maximum I <sub>CC</sub> /Input	B <sub>n</sub>	3.6	5.5	1.0	1.35	1.5	mA	V <sub>I</sub> = V <sub>CCB</sub> -2.1V V <sub>I</sub> = V <sub>CC</sub> -0.6V
		All Inputs	3.6	3.6		0.35	0.5		
I <sub>CCA1</sub>	Quiescent V <sub>CCA</sub> Supply Current as B Port Floats	3.6	Open		5	50		μA	A <sub>n</sub> = V <sub>CCA</sub> or GND, B <sub>n</sub> = Open, OE = V <sub>CCA</sub> , T/R = V <sub>CCA</sub> , V <sub>CCB</sub> = Open
I <sub>CCA2</sub>	Quiescent V <sub>CCA</sub> Supply Current	3.6	3.6		5	50		μA	A <sub>n</sub> = V <sub>CCA</sub> or GND, B <sub>n</sub> = V <sub>CCB</sub> or GND, OE = GND, T/R = GND
		3.6	5.5		5	50			
I <sub>CCB</sub>	Quiescent V <sub>CCB</sub> Supply Current	3.6	3.6		5	50		μA	A <sub>n</sub> = V <sub>CCA</sub> or GND, B <sub>n</sub> = V <sub>CCB</sub> or GND, OE = GND, T/R = V <sub>CCA</sub>
		3.6	5.5		8	80			
V <sub>OLPA</sub>	Quiet Output Maximum Dynamic	3.3	3.3		0.8			V	(Note 3)(Note 4)
		3.3	5.0		0.8				
V <sub>OLPB</sub>	V <sub>OL</sub>	3.3	3.3		0.8			V	(Note 3)(Note 4)
		3.3	5.0		1.5				
V <sub>OLVA</sub>	Quiet Output Minimum Dynamic	3.3	3.3		-0.8			V	(Note 3)(Note 4)
		3.3	5.0		-0.8				
V <sub>OLVB</sub>	V <sub>OL</sub>	3.3	3.3		-0.8			V	(Note 3)(Note 4)
		3.3	5.0		-1.2				
V <sub>IHDA</sub>	Minimum HIGH Level Dynamic	3.3	3.3		2.0			V	(Note 3)(Note 5)
		3.3	5.0		2.0				
V <sub>IHDB</sub>	Input Voltage	3.3	3.3		2.0			V	(Note 3)(Note 5)
		3.3	5.0		3.5				
V <sub>ILDA</sub>	Maximum LOW Level Dynamic	3.3	3.3		0.8			V	(Note 3)(Note 5)
		3.3	5.0		0.8				
V <sub>ILDB</sub>	Input Voltage	3.3	3.3		0.8			V	(Note 3)(Note 5)
		3.3	5.0		1.5				

**Note 3:** Worst case package.  
**Note 4:** Max number of outputs defined as (n). Data inputs are driven 0V to V<sub>CC</sub> level; one output at GND.  
**Note 5:** Max number of Data Inputs (n) switching. (n-1) inputs switching 0V to V<sub>CC</sub> level. Input-under-test switching: V<sub>CC</sub> level to threshold (V<sub>IHD</sub>), 0V to threshold (V<sub>ILD</sub>), f = 1 MHz.

AC Electrical Characteristics												
Symbol	Parameter	T <sub>A</sub> = +25°C C <sub>L</sub> = 50 pF V <sub>CCA</sub> = 2.7V–3.6V V <sub>CCB</sub> = 4.5V–5.5V			T <sub>A</sub> = –40°C to +85°C C <sub>L</sub> = 50 pF V <sub>CCA</sub> = 2.7V–3.6V V <sub>CCB</sub> = 4.5V–5.5V		T <sub>A</sub> = +25°C C <sub>L</sub> = 50 pF V <sub>CCA</sub> = 2.7V–3.6V V <sub>CCB</sub> = 3.0V–3.6V			T <sub>A</sub> = –40°C to +85°C C <sub>L</sub> = 50 pF V <sub>CCA</sub> = 2.7V–3.6V V <sub>CCB</sub> = 3.0V–3.6V		Units
		Min	Typ (Note 6)	Max	Min	Max	Min	Typ (Note 7)	Max	Min	Max	
t <sub>PHL</sub>	Propagation Delay	1.0	4.8	8.0	1.0	8.5	1.0	5.5	8.5	1.0	9.0	ns
t <sub>PLH</sub>	A to B	1.0	3.9	6.5	1.0	7.0	1.0	5.2	8.0	1.0	8.5	
t <sub>PHL</sub>	Propagation Delay	1.0	3.8	6.5	1.0	7.0	1.0	4.4	7.0	1.0	7.5	ns
t <sub>PLH</sub>	B to A	1.0	4.3	7.5	1.0	8.0	1.0	5.1	7.5	1.0	8.0	
t <sub>PZL</sub>	Output Enable Time	1.0	4.7	8.0	1.0	8.5	1.0	6.0	9.0	1.0	9.5	ns
t <sub>PZH</sub>	$\overline{OE}$ to B	1.0	4.8	8.5	1.0	9.0	1.0	6.1	9.5	1.0	10.0	
t <sub>PZL</sub>	Output Enable Time	1.0	5.9	9.5	1.0	10.0	1.0	6.4	10.0	1.0	10.5	ns
t <sub>PZH</sub>	$\overline{OE}$ to A	1.0	5.4	9.0	1.0	9.5	1.0	5.8	9.0	1.0	9.5	
t <sub>PHZ</sub>	Output Disable Time	1.0	4.0	8.0	1.0	8.5	1.0	6.3	9.5	1.0	10.0	ns
t <sub>PLZ</sub>	$\overline{OE}$ to B	1.0	3.8	7.5	1.0	8.0	1.0	4.5	8.0	1.0	8.5	
t <sub>PHZ</sub>	Output Disable Time	1.0	4.6	9.5	1.0	10.0	1.0	5.2	9.5	1.0	10.0	ns
t <sub>PLZ</sub>	$\overline{OE}$ to A	1.0	3.1	6.5	1.0	7.0	1.0	3.4	6.5	1.0	7.0	
t <sub>OSHL</sub>	Output to Output		1.0	1.5		1.5		1.0	1.5		1.5	ns
t <sub>OSLH</sub>	Skew (Note 8) Data to Output											

**Note 6:** Typical values at V<sub>CCA</sub> = 3.3V, V<sub>CCB</sub> = 5.0V @ 25°C.

**Note 7:** Typical values at V<sub>CCA</sub> = 3.3V, V<sub>CCB</sub> = 3.3V @ 25°C.

**Note 8:** Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>). Parameter guaranteed by design.

### Capacitance

Symbol	Parameter	Typ	Units	Conditions	
C <sub>IN</sub>	Input Capacitance	4.5	pF	V <sub>CC</sub> = Open	
C <sub>I/O</sub>	Input/Output Capacitance	10	pF	V <sub>CCA</sub> = 3.3V V <sub>CCB</sub> = 5.0V	
C <sub>PD</sub>	Power Dissipation Capacitance (Note 9)	A→B	50	pF	V <sub>CCB</sub> = 5.0V
		B→A	40	pF	V <sub>CCA</sub> = 3.3V

**Note 9:** C<sub>PD</sub> is measured at 10 MHz.

### Power Up Considerations

To insure the system does not experience unnecessary  $I_{CC}$  current draw, bus contention, or oscillations during power up, the following guidelines should be adhered to (refer to Table 1):

- Power up the control side of the device first. This is the  $V_{CCA}$  side.
- $\overline{OE}$  should ramp with or ahead of  $V_{CCA}$ . This will help guard against bus contention.
- The Transmit/Receive control pin ( $T/\overline{R}$ ) should ramp with  $V_{CCA}$ , this will ensure that the A Port data pins are con-

figured as inputs. With  $V_{CCA}$  receiving power first, the A I/O Port should be configured as inputs to help guard against bus contention and oscillations.

- A side data inputs should be driven to a valid logic level. This will prevent excessive current draw.

The above steps will ensure that no bus contention or oscillations, and therefore no excessive current draw occurs during the power up cycling of these devices. These steps will help prevent possible damage to the translator devices and potential damage to other system components.


TABLE 1. Low Voltage Translator Power Up Sequencing Table

Device Type	$V_{CCA}$	$V_{CCB}$	$T/\overline{R}$	$\overline{OE}$	A Side I/O	B Side I/O	Floatable Pin Allowed
74LVXC3245	3V (power up 1st)	3V to 5.5V configurable	ramp with $V_{CCA}$	ramp with $V_{CCA}$	logic 0V or $V_{CCA}$	outputs	yes, $V_{CCB}$ and B I/O's w/ $\overline{OE}$ HIGH

Please reference Application Note AN-5001 for more detailed information on using Fairchild's LVX Low Voltage Dual Supply CMOS Translating Transceivers.

### Configurable I/O Application for PCMCIA Cards

#### Block Diagram

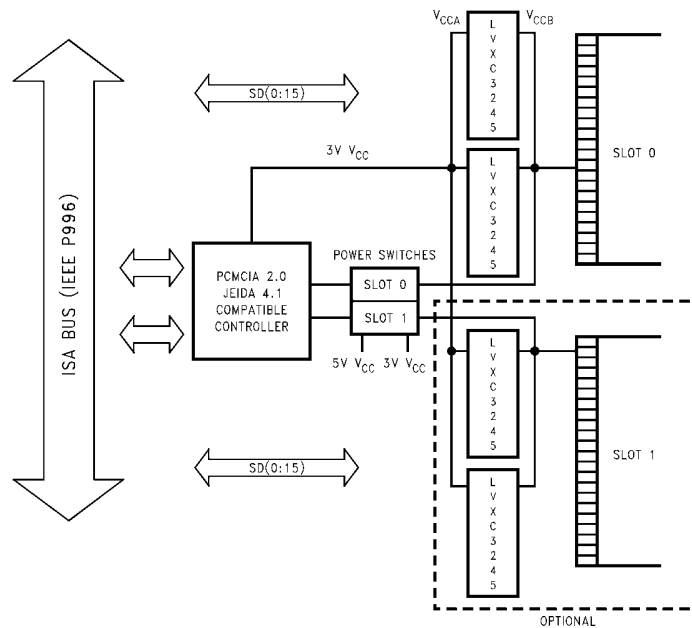


The LVXC3245 is a 24-pin dual supply device well suited for PCMCIA configurable I/O applications. Ideal for low power notebook designs, the LVXC3245 consumes less than 1 mW of quiescent power in all modes of operation. The LVXC3245 meets all PCMCIA I/O voltage requirements at 5V and 3.3V operation. By tying  $V_{CCB}$  of the LVXC3245 to the card voltage supply, the PCMCIA card


will always experience rail to rail output swings, maximizing the reliability of the interface.

The  $V_{CCA}$  pin on the LVXC3245 must always be tied to a 3V power supply. This voltage connection provides internal references needed to account for variations in  $V_{CCB}$ . When connected as in the figure above, the LVXC3245 meets all the voltage and current requirements of the ISA bus standard (IEEE P996).

**Physical Dimensions** inches (millimeters) unless otherwise noted

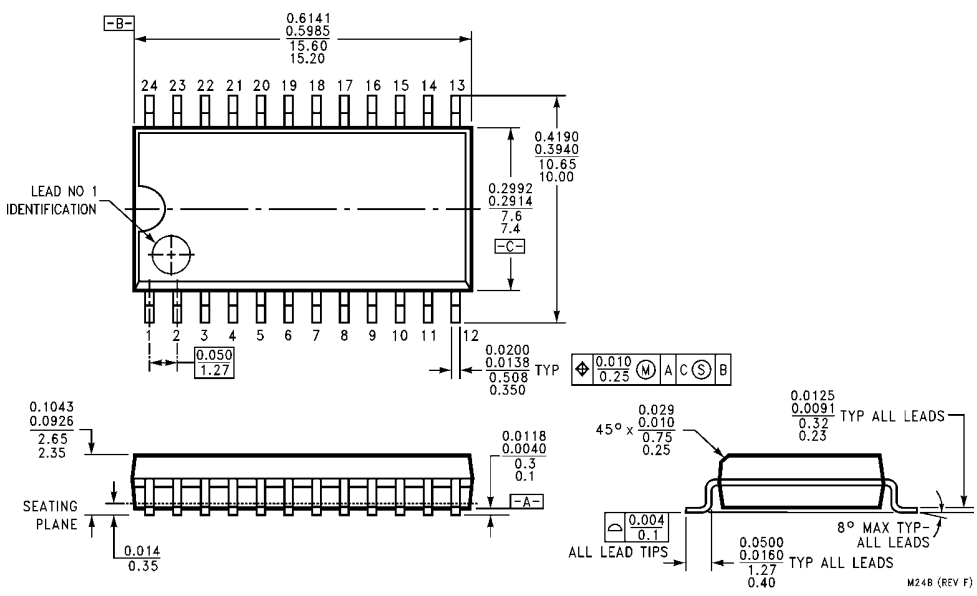

**24-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide  
Package Number M24B**

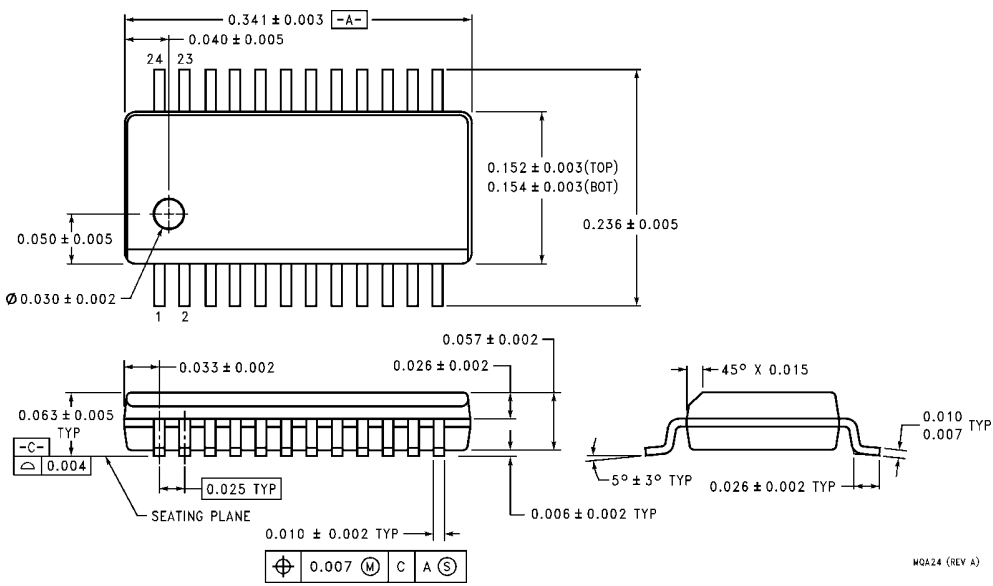

**24-Lead Quarter Size Outline Package (QSOP), JEDEC MO-37, 0.150" Wide  
Package Number MQA24**

