

## 74VCX162601

# Low Voltage 18-Bit Universal Bus Transceivers with 3.6V Tolerant Inputs and Outputs and 26Ω Series Resistors in the B-Port Outputs

### General Description

The VCX162601, 18-bit universal bus transceiver, combines D-type latches and D-type flip-flops to allow data flow in transparent, latched, and clocked modes.

Data flow in each direction is controlled by output-enable ( $\overline{OEAB}$  and  $\overline{OEBA}$ ), latch-enable (LEAB and LEBA), and clock (CLKAB and CLKBA) inputs. The clock can be controlled by the clock-enable (CLKENAB and CLKENBA) inputs. For A-to-B data flow, the device operates in the transparent mode when LEAB is HIGH. When LEAB is LOW, the A data is latched if CLKAB is held at a HIGH-to-LOW logic level. If LEAB is LOW, the A bus data is stored in the latch/flip-flop on the LOW-to-HIGH transition of CLKAB. Output-enable  $\overline{OEAB}$  is active-LOW. When  $\overline{OEAB}$  is HIGH, the outputs are in the HIGH-impedance state.

Data flow for B to A is similar to that of A to B but uses  $\overline{OEBA}$ , LEBA, CLKBA and CLKENBA.

The 74VCX162601 is designed for low voltage (1.65V to 3.6V)  $V_{CC}$  applications with I/O compatibility up to 3.6V. The VCX162601 is also designed with 26Ω series resistors in the B-Port outputs. This design reduces line noise in applications such as memory address drivers, clock drivers, and bus transceivers/transmitters.

### Features

- 1.65V–3.6V  $V_{CC}$  supply operation
- 3.6V tolerant inputs and outputs
- 26Ω series resistors in B-Port outputs
- $t_{PD}$  (A to B)
  - 3.8 ns max for 3.0V to 3.6V  $V_{CC}$
  - 4.6 ns max for 2.3V to 2.7V  $V_{CC}$
  - 9.2 ns max for 1.65V to 1.95V  $V_{CC}$
- Power-down high impedance inputs and outputs
- Supports live insertion/withdrawal (Note 1)
- Static Drive ( $I_{OH}/I_{OL}$  B outputs)
  - ±12 mA @ 3.0V  $V_{CC}$
  - ±8 mA @ 2.3V  $V_{CC}$
  - ±3 mA @ 1.65V  $V_{CC}$
- Uses patented noise/EMI reduction circuitry
- Latchup performance exceeds 300 mA
- ESD performance:
  - Human body model > 2000V
  - Machine model >200V

**Note 1:** To ensure the high-impedance state during power up or power down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pull-up resistor; the minimum value of the resistor is determined by the current-sourcing capability of the driver.

### Ordering Code:


| Order Number   | Package Number | Package Description   |
|----------------|----------------|---|
| 74VCX162601MTD | MTD56          | 56-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

### Pin Descriptions

| Pin Names                             | Description                       |
|---------------------------------------|-----------------------------------|
| $\overline{OEAB}$ , $\overline{OEBA}$ | Output Enable Inputs (Active LOW) |
| LEAB, LEBA                            | Latch Enable Inputs               |
| CLKAB, CLKBA                          | Clock Inputs                      |
| CLKENAB, CLKENBA                      | Clock Enable Inputs               |
| A <sub>1</sub> –A <sub>18</sub>       | Side A Inputs or 3-STATE Outputs  |
| B <sub>1</sub> –B <sub>18</sub>       | Side B Inputs or 3-STATE Outputs  |

### Connection Diagram

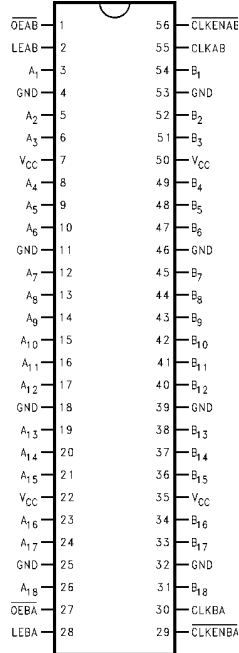

### Function Table (Note 2)

| Inputs  |      |      |       |                | Outputs                 |
|---------|------|------|-------|----------------|-------------------------|
| CLKENAB | OEAB | LEAB | CLKAB | A <sub>n</sub> | B <sub>n</sub>          |
| X       | H    | X    | X     | X              | Z                       |
| X       | L    | H    | X     | L              | L                       |
| X       | L    | H    | X     | H              | H                       |
| H       | L    | L    | X     | X              | B <sub>0</sub> (Note 3) |
| H       | L    | L    | X     | X              | B <sub>0</sub> (Note 3) |
| L       | L    | L    | ↑     | L              | L                       |
| L       | L    | L    | ↑     | H              | H                       |
| L       | L    | L    | L     | X              | B <sub>0</sub> (Note 3) |
| L       | L    | L    | H     | X              | B <sub>0</sub> (Note 4) |


H = HIGH Voltage Level  
 L = LOW Voltage Level  
 X = Immaterial (HIGH or LOW, inputs may not float)  
 Z = High Impedance

**Note 2:** A-to-B data flow is shown; B-to-A flow is similar but uses OEBA, LEBA, CLKBA, and CLKENBA.

**Note 3:** Output level before the indicated steady-state input conditions were established.

**Note 4:** Output level before the indicated steady-state input conditions were established, provided that CLKAB was HIGH before LEAB went LOW.

### Logic Diagram

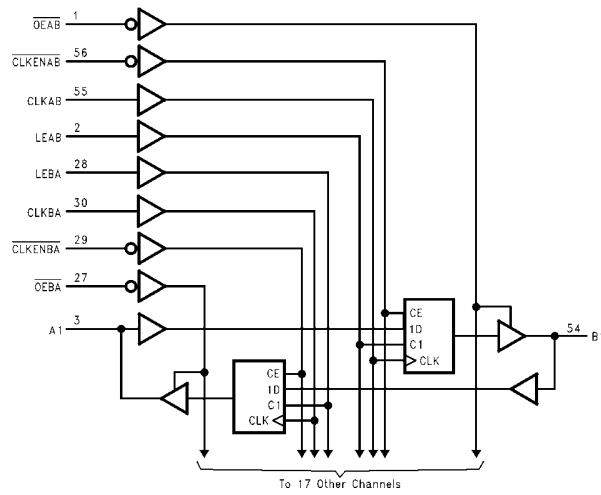

| Symbol           | Parameter                              | Conditions  | V <sub>CC</sub> (V)            | Min  | Max                       | Units |
|------------------|--|---|--------------------------------|--|---------------------------|-------|
| V <sub>IH</sub>  | HIGH Level Input Voltage               |   | 2.7 – 3.6                      | 2.0  |                           | V     |
| V <sub>IL</sub>  | LOW Level Input Voltage                |   | 2.7 – 3.6                      |  | 0.8                       | V     |
| V <sub>OH</sub>  | HIGH Level Output Voltage<br>B Outputs | I <sub>OH</sub> = –100 µA<br>I <sub>OH</sub> = –6 mA<br>I <sub>OH</sub> = –8 mA<br>I <sub>OH</sub> = –12 mA   | 2.7 – 3.6<br>2.7<br>3.0<br>3.0 | V <sub>CC</sub> – 0.2<br>2.2<br>2.4<br>2.2 |                           | V     |
|                  | HIGH Level Output Voltage<br>A Outputs | I <sub>OH</sub> = –100 µA<br>I <sub>OH</sub> = –12 mA<br>I <sub>OH</sub> = –18 mA<br>I <sub>OH</sub> = –24 mA | 2.7 – 3.6<br>2.7<br>3.0<br>3.0 | V <sub>CC</sub> – 0.2<br>2.2<br>2.4<br>2.2 |                           | V     |
| V <sub>OL</sub>  | LOW Level Output Voltage<br>B Outputs  | I <sub>OL</sub> = 100 µA<br>I <sub>OL</sub> = 6 mA<br>I <sub>OL</sub> = 8 mA<br>I <sub>OL</sub> = 12 mA       | 2.7 – 3.6<br>2.7<br>3.0<br>3.0 |  | 0.2<br>0.4<br>0.55<br>0.8 | V     |
|                  | LOW Level Output Voltage<br>A Outputs  | I <sub>OL</sub> = 100 µA<br>I <sub>OL</sub> = 12 mA<br>I <sub>OL</sub> = 18 mA<br>I <sub>OL</sub> = 24 mA     | 2.7 – 3.6<br>2.7<br>3.0<br>3.0 |  | 0.2<br>0.4<br>0.4<br>0.55 | V     |
| I <sub>I</sub>   | Input Leakage Current                  | 0V ≤ V <sub>I</sub> ≤ 3.6V  | 2.7 – 3.6                      |  | ±5.0                      | µA    |
| I <sub>OZ</sub>  | 3-STATE Output Leakage                 | 0V ≤ V <sub>O</sub> ≤ 3.6V<br>V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                             | 2.7 – 3.6                      |  | ±10                       | µA    |
| I <sub>OFF</sub> | Power Off Leakage Current              | 0V ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V  | 0                              |  | 10                        | µA    |
| I <sub>CC</sub>  | Quiescent Supply Current               | V <sub>I</sub> = V <sub>CC</sub> or GND   | 2.7 – 3.6                      |  | 20                        | µA    |
|                  |  | V <sub>CC</sub> ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V (Note 8)  | 2.7 – 3.6                      |  | ±20                       | µA    |
| ΔI <sub>CC</sub> | Increase in I <sub>CC</sub> per Input  | V <sub>IH</sub> = V <sub>CC</sub> – 0.6V  | 2.7 – 3.6                      |  | 750                       | µA    |

**Note 8:** Outputs disabled or 3-STATE only.

### Absolute Maximum Ratings (Note 5)

|   |                                |
|---|--------------------------------|
| Supply Voltage (V <sub>CC</sub> )                                 | –0.5V to +4.6V                 |
| DC Input Voltage (V <sub>I</sub> )                                | –0.5V to +4.6V                 |
| Output Voltage (V <sub>O</sub> )                                  |                                |
| Outputs 3-State   | –0.5V to +4.6V                 |
| Outputs Active (Note 6)   | –0.5 to V <sub>CC</sub> + 0.5V |
| DC Input Diode Current (I <sub>IK</sub> ) V <sub>I</sub> < 0V     | –50 mA                         |
| DC Output Diode Current (I <sub>OK</sub> )                        |                                |
| V <sub>O</sub> < 0V   | –50 mA                         |
| V <sub>O</sub> > V <sub>CC</sub>                                  | +50 mA                         |
| DC Output Source/Sink Current (I <sub>OH</sub> /I <sub>OL</sub> ) | ±50 mA                         |
| DC V <sub>CC</sub> or Ground Current per                          |                                |
| Supply Pin (I <sub>CC</sub> or Ground)                            | ±100 mA                        |
| Storage Temperature Range (T <sub>STG</sub> )                     | –65°C to +150°C                |

|   |                       |
|---|-----------------------|
| Input Voltage   | –0.3V to 3.6V         |
| Output Voltage (V <sub>O</sub> )                              |                       |
| Output in Active States                                       | 0V to V <sub>CC</sub> |
| Output in 3-STATE   | 0.0V to 3.6V          |
| Output Current in I <sub>OH</sub> /I <sub>OL</sub> B Outputs  |                       |
| V <sub>CC</sub> = 3.0V to 3.6V                                | ±12 mA                |
| V <sub>CC</sub> = 2.3V to 2.7V                                | ±8 mA                 |
| V <sub>CC</sub> = 1.65V to 1.95V                              | ±3 mA                 |
| Output Current in ±I <sub>OH</sub> /I <sub>OL</sub> A Outputs |                       |
| V <sub>CC</sub> = 3.0V to 3.6V                                | ±24 mA                |
| V <sub>CC</sub> = 2.3V to 2.7V                                | ±18 mA                |
| V <sub>CC</sub> = 1.65V to 2.3V                               | ±6 mA                 |
| Free Air Operating Temperature (T <sub>A</sub> )              | –40°C to +85°C        |
| Minimum Input Edge Rate (Δt/ΔV)                               |                       |
| V <sub>IN</sub> = 0.8V to 2.0V, V <sub>CC</sub> = 3.0V        | 10 ns/V               |

**Note 5:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The Recommended Operating Conditions tables will define the conditions for actual device operation.

**Note 6:** I<sub>O</sub> Absolute Maximum Rating must be observed.

**Note 7:** Floating or unused pin (inputs or I/O's) must be held HIGH or LOW.

### Recommended Operating Conditions (Note 7)

|                     |               |
|---------------------|---------------|
| Power Supply        |               |
| Operating           | 1.65V to 3.6V |
| Data Retention Only | 1.2V to 3.6V  |

### DC Electrical Characteristics (2.7V < V<sub>CC</sub> ≤ 3.6V)

| <b>DC Electrical Characteristics (<math>2.3V \leq V_{CC} \leq 2.7V</math>)</b>  |  |  |                                |  |                        |       |
|---|--|--|--------------------------------|--|------------------------|-------|
| Symbol  | Parameter                              | Conditions   | V <sub>CC</sub> (V)            | Min  | Max                    | Units |
| V <sub>IH</sub>   | HIGH Level Input Voltage               |  | 2.3 - 2.7                      | 1.6  |                        | V     |
| V <sub>IL</sub>   | LOW Level Input Voltage                |  | 2.3 - 2.7                      |  | 0.7                    | V     |
| V <sub>OH</sub>   | HIGH Level Output Voltage<br>B Outputs | I <sub>OH</sub> = -100 μA<br>I <sub>OH</sub> = -4 mA<br>I <sub>OH</sub> = -6 mA<br>I <sub>OH</sub> = -8 mA       | 2.3 - 2.7<br>2.3<br>2.3<br>2.3 | V <sub>CC</sub> - 0.2<br>2.0<br>1.8<br>1.7 |                        | V     |
|   | HIGH Level Output Voltage<br>A Outputs | I <sub>OH</sub> = -100 μA<br>I <sub>OH</sub> = -6 mA<br>I <sub>OH</sub> = -12 mA<br>I <sub>OH</sub> = -18 mA     | 2.3 - 2.7<br>2.3<br>2.3<br>2.3 | V <sub>CC</sub> - 0.2<br>2.0<br>1.8<br>1.7 |                        | V     |
| V <sub>OL</sub>   | LOW Level Output Voltage<br>B Outputs  | I <sub>OL</sub> = 100 μA<br>I <sub>OL</sub> = 6 mA<br>I <sub>OL</sub> = 8 mA                                     | 2.3 - 2.7<br>2.3<br>2.3        |  | 0.2<br>0.4<br>0.6      | V     |
|   | LOW Level Output Voltage<br>A Outputs  | I <sub>OL</sub> = 100 μA<br>I <sub>OL</sub> = 12 mA<br>I <sub>OL</sub> = 18 mA                                   | 2.3 - 2.7<br>2.3<br>2.3        |  | 0.2<br>0.4<br>0.6      | V     |
| I <sub>I</sub>  | Input Leakage Current                  | 0 ≤ V <sub>I</sub> ≤ 3.6V  | 2.3 - 2.7                      |  | ±5.0                   | μA    |
| I <sub>OZ</sub>   | 3-STATE Output Leakage                 | 0 ≤ V <sub>O</sub> ≤ 3.6V<br>V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                 | 2.3 - 2.7                      |  | ±10                    | μA    |
| I <sub>OFF</sub>  | Power Off Leakage Current              | 0 ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V  | 0                              |  | 10                     | μA    |
| I <sub>CC</sub>   | Quiescent Supply Current               | V <sub>I</sub> = V <sub>CC</sub> or GND<br>V <sub>CC</sub> ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V (Note 9)  | 2.3 - 2.7<br>2.3 - 2.7         |  | 20<br>±20              | μA    |
| <b>Note 9:</b> Outputs disabled or 3-STATE only.                                |  |  |                                |  |                        |       |
| <b>DC Electrical Characteristics (<math>1.65V \leq V_{CC} &lt; 2.3V</math>)</b> |  |  |                                |  |                        |       |
| Symbol  | Parameter                              | Conditions   | V <sub>CC</sub> (V)            | Min  | Max                    | Units |
| V <sub>IH</sub>   | HIGH Level Input Voltage               |  | 1.65 - 2.3                     | 0.65 × V <sub>CC</sub>                     |                        | V     |
| V <sub>IL</sub>   | LOW Level Input Voltage                |  | 1.65 - 2.3                     |  | 0.35 × V <sub>CC</sub> | V     |
| V <sub>OH</sub>   | HIGH Level Output Voltage<br>B Outputs | I <sub>OH</sub> = -100 μA<br>I <sub>OH</sub> = -3 mA   | 1.65 - 2.3<br>1.65             | V <sub>CC</sub> - 0.2<br>1.4               |                        | V     |
|   | HIGH Level Output Voltage<br>A Outputs | I <sub>OH</sub> = -100 μA<br>I <sub>OH</sub> = -6 mA   | 1.65 - 2.3<br>1.65             | V <sub>CC</sub> - 0.2<br>1.25              |                        | V     |
| V <sub>OL</sub>   | LOW Level Output Voltage<br>B Outputs  | I <sub>OL</sub> = 100 μA<br>I <sub>OL</sub> = 3 mA   | 1.65 - 2.3<br>1.65             |  | 0.2<br>0.3             | V     |
|   | LOW Level Output Voltage<br>A Outputs  | I <sub>OL</sub> = 100 μA<br>I <sub>OL</sub> = 6 mA   | 1.65 - 2.3<br>1.65             |  | 0.2<br>0.3             | V     |
| I <sub>I</sub>  | Input Leakage Current                  | 0 ≤ V <sub>I</sub> ≤ 3.6V  | 1.65 - 2.3                     |  | ±5.0                   | μA    |
| I <sub>OZ</sub>   | 3-STATE Output Leakage                 | 0 ≤ V <sub>O</sub> ≤ 3.6V<br>V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                 | 1.65 - 2.3                     |  | ±10                    | μA    |
| I <sub>OFF</sub>  | Power Off Leakage Current              | 0 ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V  | 0                              |  | 10                     | μA    |
| I <sub>CC</sub>   | Quiescent Supply Current               | V <sub>I</sub> = V <sub>CC</sub> or GND<br>V <sub>CC</sub> ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V (Note 10) | 1.65 - 2.3<br>1.65 - 2.3       |  | 20<br>±20              | μA    |
| <b>Note 10:</b> Outputs disabled or 3-STATE only.                               |  |  |                                |  |                        |       |

| AC Electrical Characteristics (Note 11) |                                    |   |     |                                |     |   |      |       |
|---|------------------------------------|---|-----|--------------------------------|-----|---|------|-------|
| Symbol                                  | Parameter                          | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}, C_L = 30 \text{ pF}, R_L = 500\Omega$ |     |                                |     |   |      | Units |
|   |                                    | $V_{CC} = 3.3\text{V} \pm 0.3\text{V}$  |     | $V_{CC} = 2.5 \pm 0.2\text{V}$ |     | $V_{CC} = 1.8\text{V} \pm 0.15\text{V}$ |      |       |
|   |                                    | Min   | Max | Min                            | Max | Min                                     | Max  |       |
| $f_{MAX}$                               | Maximum Clock Frequency            | 250   |     | 200                            |     | 100                                     |      | MHz   |
| $t_{PHL}, t_{PLH}$                      | Propagation Delay<br>B to A        | 0.8   | 2.9 | 1.0                            | 3.5 | 1.5                                     | 7.0  | ns    |
| $t_{PHL}, t_{PLH}$                      | Propagation Delay<br>A to B        | 0.8   | 3.8 | 1.0                            | 4.6 | 1.5                                     | 9.2  | ns    |
| $t_{PHL}, t_{PLH}$                      | Propagation Delay<br>Clock to A    | 0.8   | 3.5 | 1.0                            | 4.4 | 1.5                                     | 8.8  | ns    |
| $t_{PHL}, t_{PLH}$                      | Propagation Delay<br>Clock to B    | 0.8   | 4.4 | 1.0                            | 5.5 | 1.5                                     | 9.8  | ns    |
| $t_{PHL}, t_{PLH}$                      | Propagation Delay<br>LEBA to A     | 0.8   | 3.5 | 1.0                            | 4.4 | 1.5                                     | 8.8  | ns    |
| $t_{PHL}, t_{PLH}$                      | Propagation Delay<br>LEAB to B     | 0.8   | 4.4 | 1.0                            | 5.8 | 1.5                                     | 9.8  | ns    |
| $t_{PZL}, t_{PZH}$                      | Output Enable Time<br>OEBA to A    | 0.8   | 3.8 | 1.0                            | 4.9 | 1.5                                     | 9.8  | ns    |
| $t_{PZL}, t_{PZH}$                      | Output Enable Time<br>OEAB to B    | 0.8   | 4.3 | 1.0                            | 5.9 | 1.5                                     | 9.8  | ns    |
| $t_{PLZ}, t_{PHZ}$                      | Output Disable Time<br>OEBA to A   | 0.8   | 3.7 | 1.0                            | 4.2 | 1.5                                     | 7.6  | ns    |
| $t_{PLZ}, t_{PHZ}$                      | Output Disable Time<br>OEAB to B   | 0.8   | 4.3 | 1.0                            | 4.9 | 1.5                                     | 8.8  | ns    |
| $t_S$                                   | Setup Time                         | 1.5   |     | 1.5                            |     | 2.5                                     |      | ns    |
| $t_H$                                   | Hold Time                          | 1.0   |     | 1.0                            |     | 1.0                                     |      | ns    |
| $t_W$                                   | Pulse Width                        | 1.5   |     | 1.5                            |     | 4.0                                     |      | ns    |
| $t_{OSHL}, t_{OSLH}$                    | Output to Output<br>Skew (Note 12) |   | 0.5 |                                | 0.5 |   | 0.75 | ns    |

**Note 11:** For  $C_L = 50\text{pF}$ , add approximately 300ps to the AC maximum specification.

**Note 12:** Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW ( $t_{OSHL}$ ) or LOW-to-HIGH ( $t_{OSLH}$ ).

### Dynamic Switching Characteristics

| Symbol           | Parameter   | Conditions   | V <sub>CC</sub><br>(V) | T <sub>A</sub> = +25°C | Units |
|------------------|---|--|------------------------|------------------------|-------|
|                  |   |  |                        | Typical                |       |
| V <sub>OLP</sub> | Quiet Output Dynamic<br>Peak V <sub>OL</sub> , B to A   | C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V | 1.8                    | 0.25                   | V     |
|                  |   |  | 2.5                    | 0.6                    |       |
|                  |   |  | 3.3                    | 0.8                    |       |
| V <sub>OLP</sub> | Quiet Output Dynamic<br>Peak V <sub>OL</sub> , A to B   | C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V | 1.8                    | 0.15                   | V     |
|                  |   |  | 2.5                    | 0.25                   |       |
|                  |   |  | 3.3                    | 0.35                   |       |
| V <sub>OLV</sub> | Quiet Output Dynamic<br>Valley V <sub>OL</sub> , B to A | C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V | 1.8                    | -0.25                  | V     |
|                  |   |  | 2.5                    | -0.6                   |       |
|                  |   |  | 3.3                    | -0.8                   |       |
| V <sub>OLV</sub> | Quiet Output Dynamic<br>Valley V <sub>OL</sub> , A to B | C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V | 1.8                    | 0.15                   | V     |
|                  |   |  | 2.5                    | -0.25                  |       |
|                  |   |  | 3.3                    | -0.35                  |       |
| V <sub>OHV</sub> | Quiet Output Dynamic<br>Valley V <sub>OH</sub> , B to A | C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V | 1.8                    | 1.5                    | V     |
|                  |   |  | 2.5                    | 1.9                    |       |
|                  |   |  | 3.3                    | 2.2                    |       |
| V <sub>OHV</sub> | Quiet Output Dynamic<br>Valley V <sub>OH</sub> , A to B | C <sub>L</sub> = 30 pF, V <sub>IH</sub> = V <sub>CC</sub> , V <sub>IL</sub> = 0V | 1.8                    | 1.5                    | V     |
|                  |   |  | 2.5                    | 2.05                   |       |
|                  |   |  | 3.3                    | 2.65                   |       |

### Capacitance

| Symbol           | Parameter                     | Conditions  | T <sub>A</sub> = +25°C | Units |
|------------------|-------------------------------|---|------------------------|-------|
| C <sub>IN</sub>  | Input Capacitance             | V <sub>CC</sub> = 1.8V, 2.5V, or 3.3V,<br>V <sub>I</sub> = 0V or V <sub>CC</sub>            | 6                      | pF    |
| C <sub>I/O</sub> | Output Capacitance            | V <sub>I</sub> = 0V, or V <sub>CC</sub> ,<br>V <sub>CC</sub> = 1.8V, 2.5V or 3.3V           | 7                      | pF    |
| C <sub>PD</sub>  | Power Dissipation Capacitance | V <sub>I</sub> = 0V or V <sub>CC</sub> , f = 10 MHz<br>V <sub>CC</sub> = 1.8V, 2.5V or 3.3V | 20                     | pF    |

## AC Loading and Waveforms

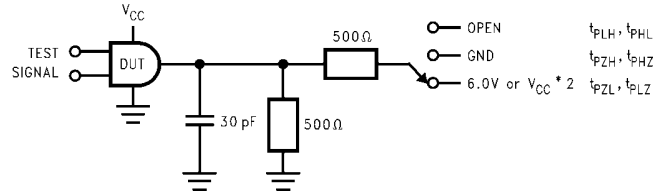


FIGURE 1. AC Test Circuit

| TEST               | SWITCH  |
|--------------------|---|
| $t_{PLH}, t_{PHL}$ | Open  |
| $t_{PZL}, t_{PLZ}$ | 6V at $V_{CC} = 3.3 \pm 0.3V$ ;<br>$V_{CC} \times 2$ at $V_{CC} = 2.5 \pm 0.2V; 1.8V \pm 0.15V$ |
| $t_{PZH}, t_{PHZ}$ | GND   |

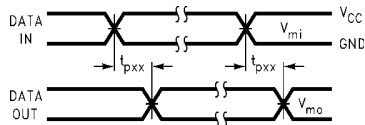


FIGURE 2. Waveform for Inverting and Non-inverting Functions

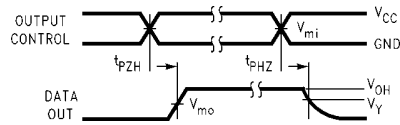


FIGURE 3. 3-STATE Output High Enable and Disable Times for Low Voltage Logic

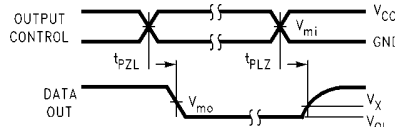


FIGURE 4. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic

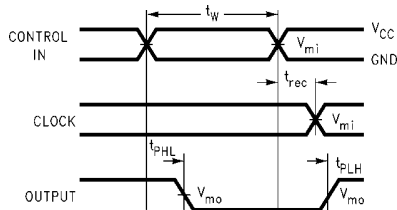


FIGURE 5. Propagation Delay, Pulse Width and  $t_{rec}$  Waveforms


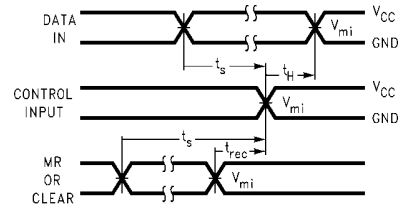


FIGURE 6. Setup Time, Hold Time and Recovery Time for Low Voltage Logic

| Symbol   | $V_{CC}$        |                  |                  |
|----------|-----------------|------------------|------------------|
|          | $3.3V \pm 0.3V$ | $2.5V \pm 0.2V$  | $1.8V \pm 0.15V$ |
| $V_{mi}$ | 1.5V            | $V_{CC}/2$       | $V_{CC}/2$       |
| $V_{mo}$ | 1.5V            | $V_{CC}/2$       | $V_{CC}/2$       |
| $V_X$    | $V_{OL} + 0.3V$ | $V_{OL} + 0.15V$ | $V_{OL} + 0.15V$ |
| $V_Y$    | $V_{OH} - 0.3V$ | $V_{OH} - 0.15V$ | $V_{OH} - 0.15V$ |

**74VCX162601 Low Voltage 18-Bit Universal Bus Transceivers with 3.6V Tolerant Inputs and Outputs and 26Ω Series Resistors in the B-Port Outputs**

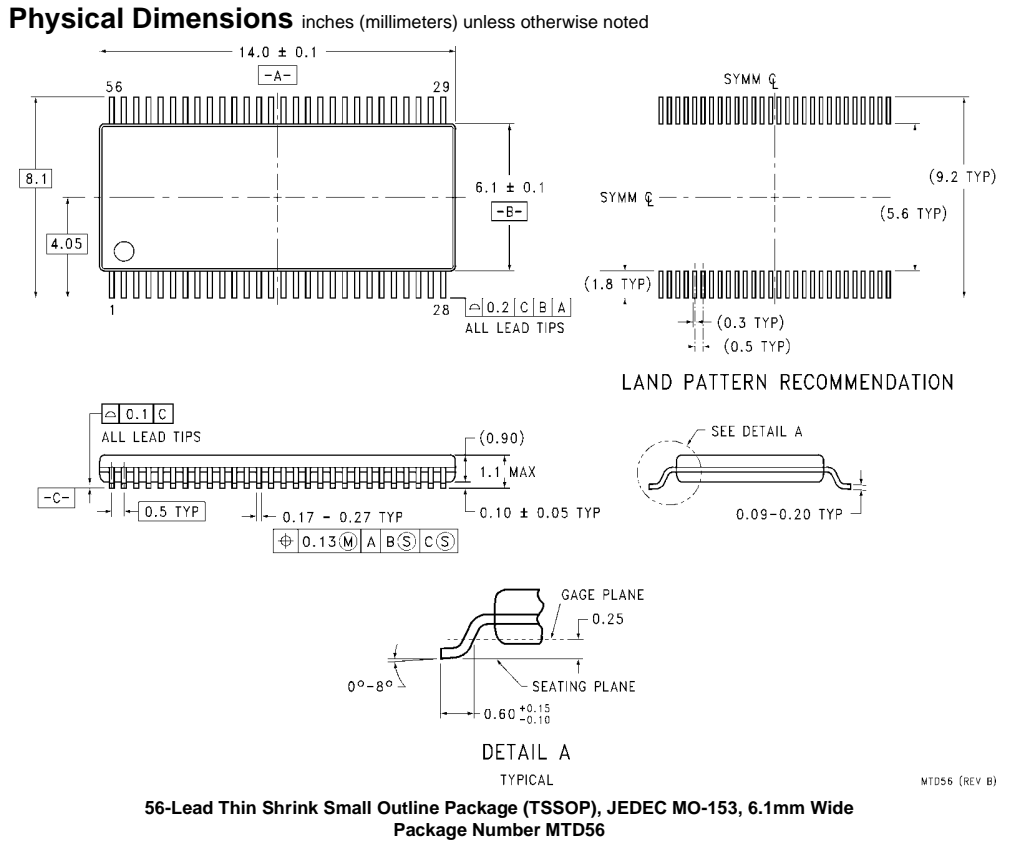

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.