

MM74C914 Hex Schmitt Trigger with Extended Input Voltage

General Description

The MM74C914 is a monolithic CMOS Hex Schmitt trigger with special input protection scheme. This scheme allows the input voltage levels to exceed V_{CC} or ground by at least 10V ($V_{CC} - 25V$ to $GND + 25V$), and is valuable for applications involving voltage level shifting or mismatched power supplies.

The positive and negative-going threshold voltages, V_{T+} and V_{T-} , show low variation with respect to temperature

(typ 0.0005V/°C at $V_{CC} = 10V$). And the hysteresis, $V_{T+} - V_{T-} \geq 0.2 V_{CC}$ is guaranteed.

Features



- Hysteresis: 0.45 V_{CC} (typ.) 0.2 V_{CC} guaranteed
- Special input protection: Extended Input Voltage Range
- Wide supply voltage range: 3V to 15V
- High noise immunity: 0.7 V_{CC} (typ.)
- Low power TTL compatibility: Fan out of 2 driving 74L

Ordering Code:

| Order Number | Package Number | Package Description |
|--------------|----------------|--|
| MM74C914M | M14A | 14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150" Narrow |
| MM74C914N | N14A | 14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide |

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

Connection Diagrams

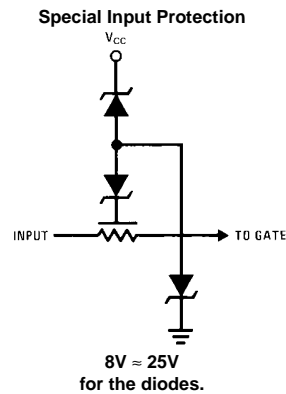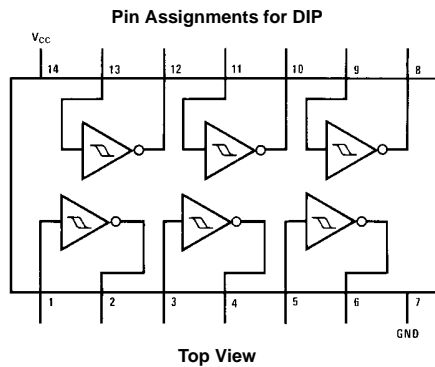

| Absolute Maximum Ratings (Note 1) | | Operating V_{CC} Range | 3V to 15V | | | |
|---|-----------------------------------|--|-----------|--------|------|---------|
| Voltage at any Input Pin | $V_{CC} - 25V$ to $GND + 25V$ | Absolute Maximum (V_{CC}) | 18V | | | |
| Voltage at any other Pin | $-0.3V$ to $V_{CC} + 0.3V$ | Lead Temperature (T_L) | 300°C | | | |
| Operating Temperature Range (T_A) | $-40^\circ C$ to $+85^\circ C$ | (Soldering, 10 seconds) | | | | |
| Storage Temperature Range (T_S) | $-65^\circ C$ to $+150^\circ C$ | | | | | |
| Power Dissipation | | | | | | |
| Dual-In-Line | 700 mW | | | | | |
| Small Outline | 500mW | | | | | |
| Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range", they are not meant to imply that the devices should be operated at these limits. The Electrical Characteristics tables provide conditions for actual device operation. | | | | | | |
| DC Electrical Characteristics | | | | | | |
| Min/Max limits apply across temperature range unless otherwise noted | | | | | | |
| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
| CMOS TO CMOS | | | | | | |
| V_{T+} | Positive Going Threshold Voltage | $V_{CC} = 5V$ | 3.0 | 3.6 | 4.3 | V |
| | | $V_{CC} = 10V$ | 6.0 | 6.8 | 8.6 | V |
| | | $V_{CC} = 15V$ | 9.0 | 10 | 12.9 | V |
| V_{T-} | Negative Going Threshold Voltage | $V_{CC} = 5V$ | 0.7 | 1.4 | 2.0 | V |
| | | $V_{CC} = 10V$ | 1.4 | 3.2 | 4.0 | V |
| | | $V_{CC} = 15V$ | 2.1 | 5 | 6.0 | V |
| $V_{T+} - V_{T-}$ | Hysteresis | $V_{CC} = 5V$ | 1.0 | 2.2 | 3.6 | V |
| | | $V_{CC} = 10V$ | 2.0 | 3.6 | 7.2 | V |
| | | $V_{CC} = 15V$ | 3.0 | 5 | 10.8 | V |
| $V_{OUT(1)}$ | Logical "1" Output Voltage | $V_{CC} = 5V, I_O = -10 \mu A$ | 4.5 | | | V |
| | | $V_{CC} = 10V, I_O = -10 \mu A$ | 9.0 | | | V |
| $V_{OUT(0)}$ | Logical "0" Output Voltage | $V_{CC} = 5V, I_O = +10 \mu A$ | | | 0.5 | V |
| | | $V_{CC} = 10V, I_O = +10 \mu A$ | | | 1.0 | V |
| $I_{IN(1)}$ | Logical "1" Input Current | $V_{CC} = 15V, V_{IN} = 25V$ | | 0.005 | 5.0 | μA |
| $I_{IN(0)}$ | Logical "0" Input Current | $V_{CC} = 15V, V_{IN} = -10V$ | -100 | -0.005 | | μA |
| I_{CC} | Supply Current | $V_{CC} = 15V, V_{IN} = -10V/25V$ | | 0.05 | 300 | μA |
| | | $V_{CC} = 5V, V_{IN} = -2.5V$ (Note 2) | | 20 | | μA |
| | | $V_{CC} = 10V, V_{IN} = 5V$ (Note 2) | | 200 | | μA |
| | | $V_{CC} = 15V, V_{IN} = 7.5V$ (Note 2) | | 600 | | μA |
| CMOS/LPTTL INTERFACE | | | | | | |
| $V_{IN(1)}$ | Logical "1" Input Voltage | $V_{CC} = 5V$ | 4.3 | | | V |
| $V_{IN(0)}$ | Logical "0" Input Voltage | $V_{CC} = 5V$ | | | 0.7 | V |
| $V_{OUT(1)}$ | Logical "1" Output Voltage | $V_{CC} = 4.75V, I_O = -360 \mu A$ | 2.4 | | | V |
| $V_{OUT(0)}$ | Logical "0" Output Voltage | $V_{CC} = 4.75V, I_O = 360 \mu A$ | | | 0.4 | V |
| OUTPUT DRIVE (See Family Characteristics Data Sheet) (Short Circuit Current) | | | | | | |
| I_{SOURCE} | Output Source Current (P-Channel) | $V_{CC} = 5V, V_{OUT} = 0V, T_A = 25^\circ C$ | -1.75 | -3.3 | | mA |
| I_{SOURCE} | Output Source Current (P-Channel) | $V_{CC} = 10V, V_{OUT} = 0V, T_A = 25^\circ C$ | -8.0 | -15 | | mA |
| I_{SINK} | Output Sink Current (N-Channel) | $V_{CC} = 5V, V_{OUT} = V_{CC}, T_A = 25^\circ C$ | 1.75 | 3.6 | | mA |
| I_{SINK} | Output Sink Current (N-Channel) | $V_{CC} = 10V, V_{OUT} = V_{CC}, T_A = 25^\circ C$ | 8.0 | 16 | | mA |
| Note 2: Only one input is at $\frac{1}{2} V_{CC}$, the others are either at V_{CC} or GND. | | | | | | |

AC Electrical Characteristics (Note 3)

$T_A = 25^\circ\text{C}$, $C_L = 50\text{ pF}$, unless otherwise specified

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------|--|-----------------------|-----|-----|-----|-------|
| t_{PHL} | Propagation Delay from Input to Output | $V_{CC} = 5\text{V}$ | | 220 | 400 | ns |
| t_{PLH} | | $V_{CC} = 10\text{V}$ | | 80 | 200 | ns |
| C_{IN} | Input Capacitance | Any Input (Note 4) | | 5 | | pF |
| C_{PD} | Power Dissipation Capacitance | Per Gate (Note 5) | | 20 | | pF |

Note 3: AC Parameters are guaranteed by DC correlated testing.
Note 4: Capacitance is guaranteed by periodic testing.
Note 5: C_{PD} determines the no load AC power consumption of any CMOS device. For complete explanation see Family Characteristics Application Note, AN-90.

Typical Performance Characteristics

Typical Transfer Characteristics

OUTPUT VOLTAGE (V)

INPUT VOLTAGE (V)

INPUT VOLTAGE

OUTPUT VOLTAGE

Guaranteed Trip Point Range

MM74C14 -40°C TO +85°C
*MINIMUM HYSTERESIS
SPREAD (= 0.2 V_{CC})

INPUT VOLTAGE (V)




V_{CC} (V)

Typical Application

Note: $V_{CC1} = V_{CC2}$
GND1 = GND2

MM74C914


Physical Dimensions inches (millimeters) unless otherwise noted

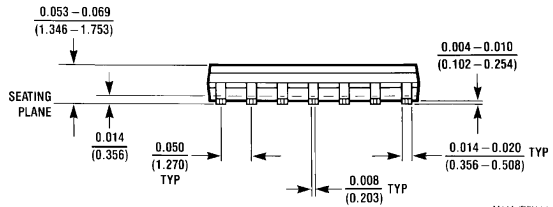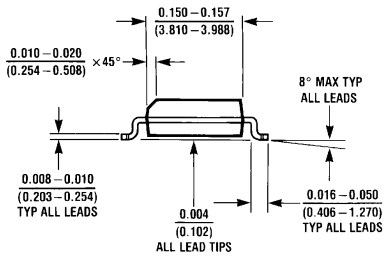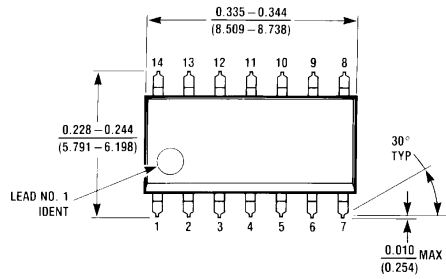

14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150" Narrow
Package Number M14A

M14A (REV. H)

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

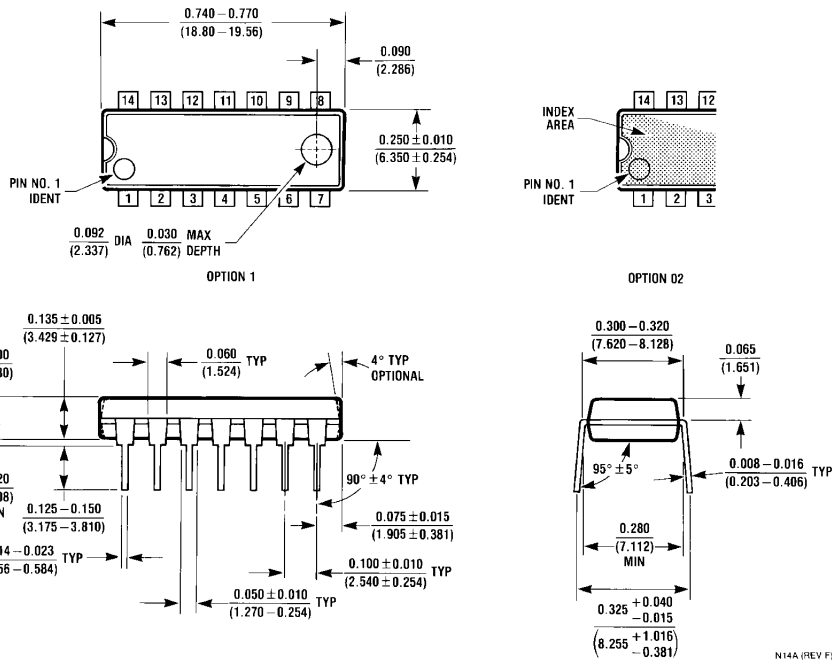

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com