



**QTLP680C-RY** Red/Yellow

**QTLP680C-RAG** Red/Yellow-Green

### PACKAGE DIMENSIONS

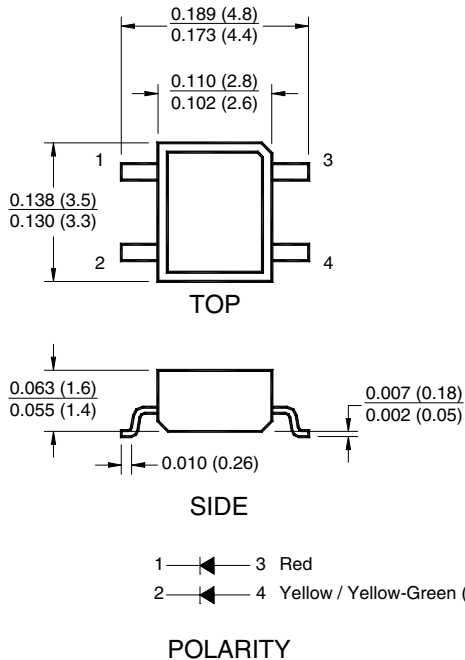

**NOTE:**

Dimensions for all drawings are in inches (mm).

### APPLICATIONS

- Backlighting
- Status indication for consumer electronics and other equipment

### DESCRIPTION

Designed with a reflective housing, these super bright surface mount LEDs offer uniform lighting and high light output performance.

### FEATURES

- Reflector package
- AlInGaP technology
- Wide viewing angle of 130°
- Water clear optics
- Moisture-proof packaging
- Available in 0.315" (8mm) width tape on 7" (178mm) diameter reel; 2,000 units per reel

# SURFACE MOUNT LED LAMP

## SUPER BRIGHT REFLECTOR

### (DUAL COLOR)

**QTLP680C-RY Red/Yellow**
**QTLP680C-RAG Red/Yellow-Green**
**ABSOLUTE MAXIMUM RATINGS** (T<sub>A</sub> =25°C Unless otherwise specified)


Parameter	Symbol	QTLP680C		Units
		-RY	-RAG	
Continuous Forward Current	I <sub>F</sub>	30 / 25	30 / 30	mA
Peak Forward Current (f = 1.0 KHz, Duty Factor = 1/10)	I <sub>FM</sub>	160 / 120	160 / 160	mA
Reverse Voltage	V <sub>R</sub>	5	5	V
Power Dissipation	P <sub>D</sub>	72 / 60	72 / 72	mW
Operating Temperature	T <sub>OPR</sub>	-40 to +85		°C
Storage Temperature	T <sub>STG</sub>	-40 to +90		°C
Lead Soldering Time	T <sub>SOL</sub>	260 for 5 sec		°C

**ELECTRICAL / OPTICAL CHARACTERISTICS** (T<sub>A</sub> =25°C)


Parameter	Symbol	QTLP680C		Units
		-RY	-RAG	
Luminous Intensity (mcd)	I <sub>V</sub>			I <sub>F</sub> = 20mA
Minimum		15 / 15	15 / 10	
Typical		35 / 35	35 / 20	
Forward Voltage (V)	V <sub>F</sub>			I <sub>F</sub> = 20mA
Maximum		2.4 / 2.4	2.4 / 2.4	
Typical		2.0 / 2.0	2.0 / 2.0	
Wavelength (nm)	λ <sub>P</sub>			I <sub>F</sub> = 20mA
Peak		630 / 590	630 / 575	
Dominant	λ <sub>D</sub>	624 / 589	624 / 573	
Spectral Line Half Width (nm)	Δλ	20 / 15	20 / 20	I <sub>F</sub> = 20mA
Viewing Angle (°)	2Θ <sub>1/2</sub>	130	130	I <sub>F</sub> = 20mA

**TYPICAL PERFORMANCE CURVES**


**Fig. 1 Forward Current vs. Forward Voltage**

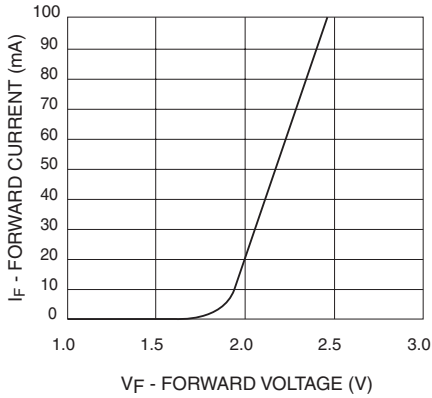


**Fig. 2 Relative Luminous Intensity vs. DC Forward Current**

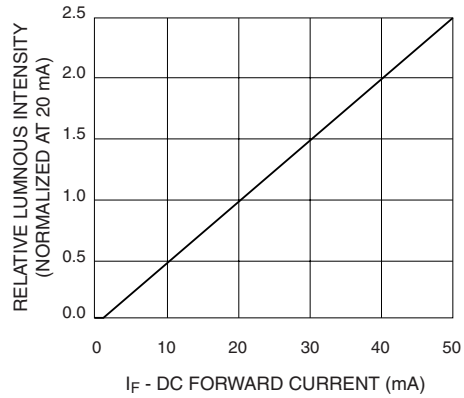


**Fig. 3 Relative Intensity vs. Peak Wavelength**

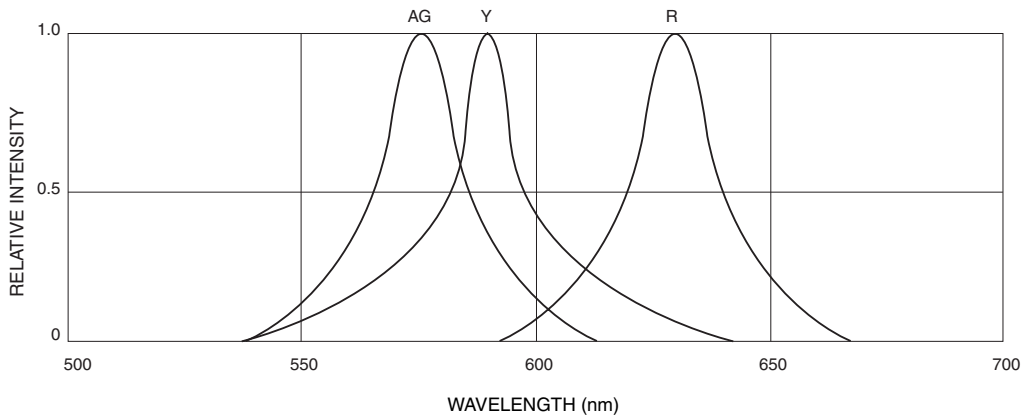

**Fig.4 Radiation Diagram**

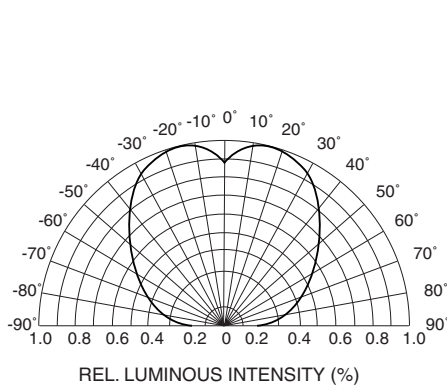

**Fig.5 Maximum Forward Current vs. Ambient Temperature**

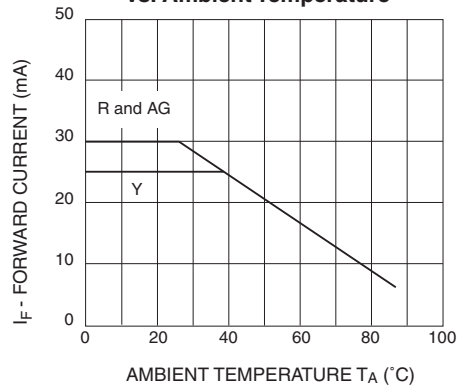


# SURFACE MOUNT LED LAMP SUPER BRIGHT REFLECTOR (DUAL COLOR)


QTLP680C-RY Red/Yellow

QTLP680C-RAG Red/Yellow-Green

**RECOMMENDED PRINTED CIRCUIT BOARD PATTERN**

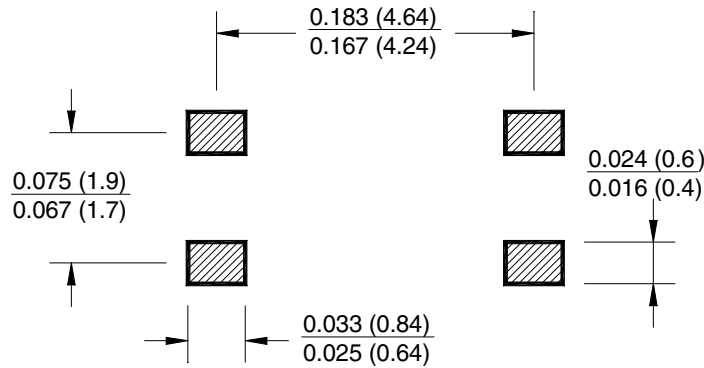


**RECOMMENDED IR REFLOW SOLDERING PROFILE**

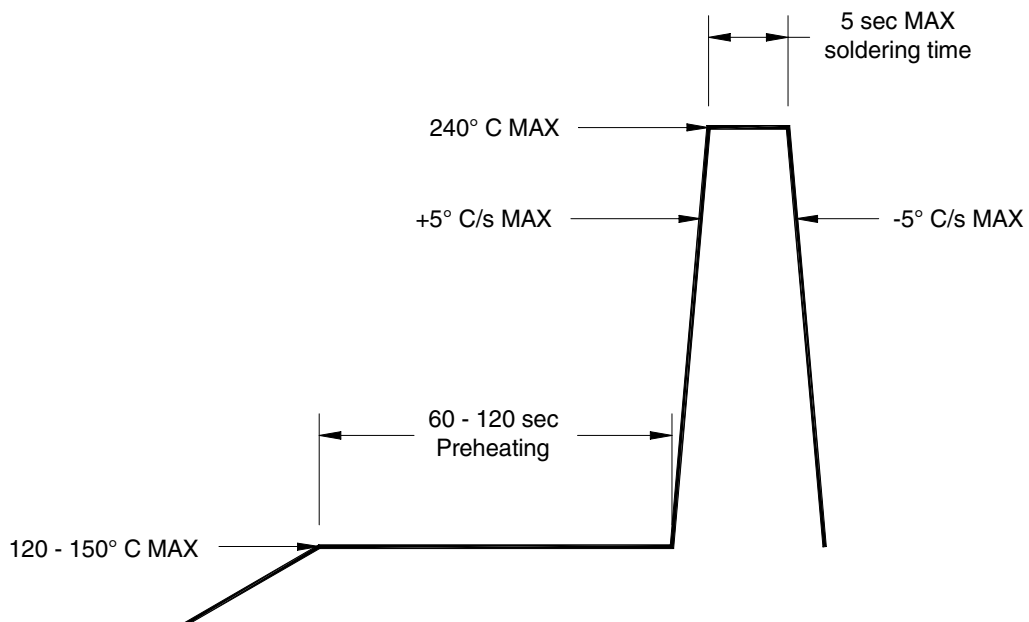

QTLP680C-RY Red/Yellow

QTLP680C-RAG Red/Yellow-Green

**TAPE AND REEL DIMENSIONS**

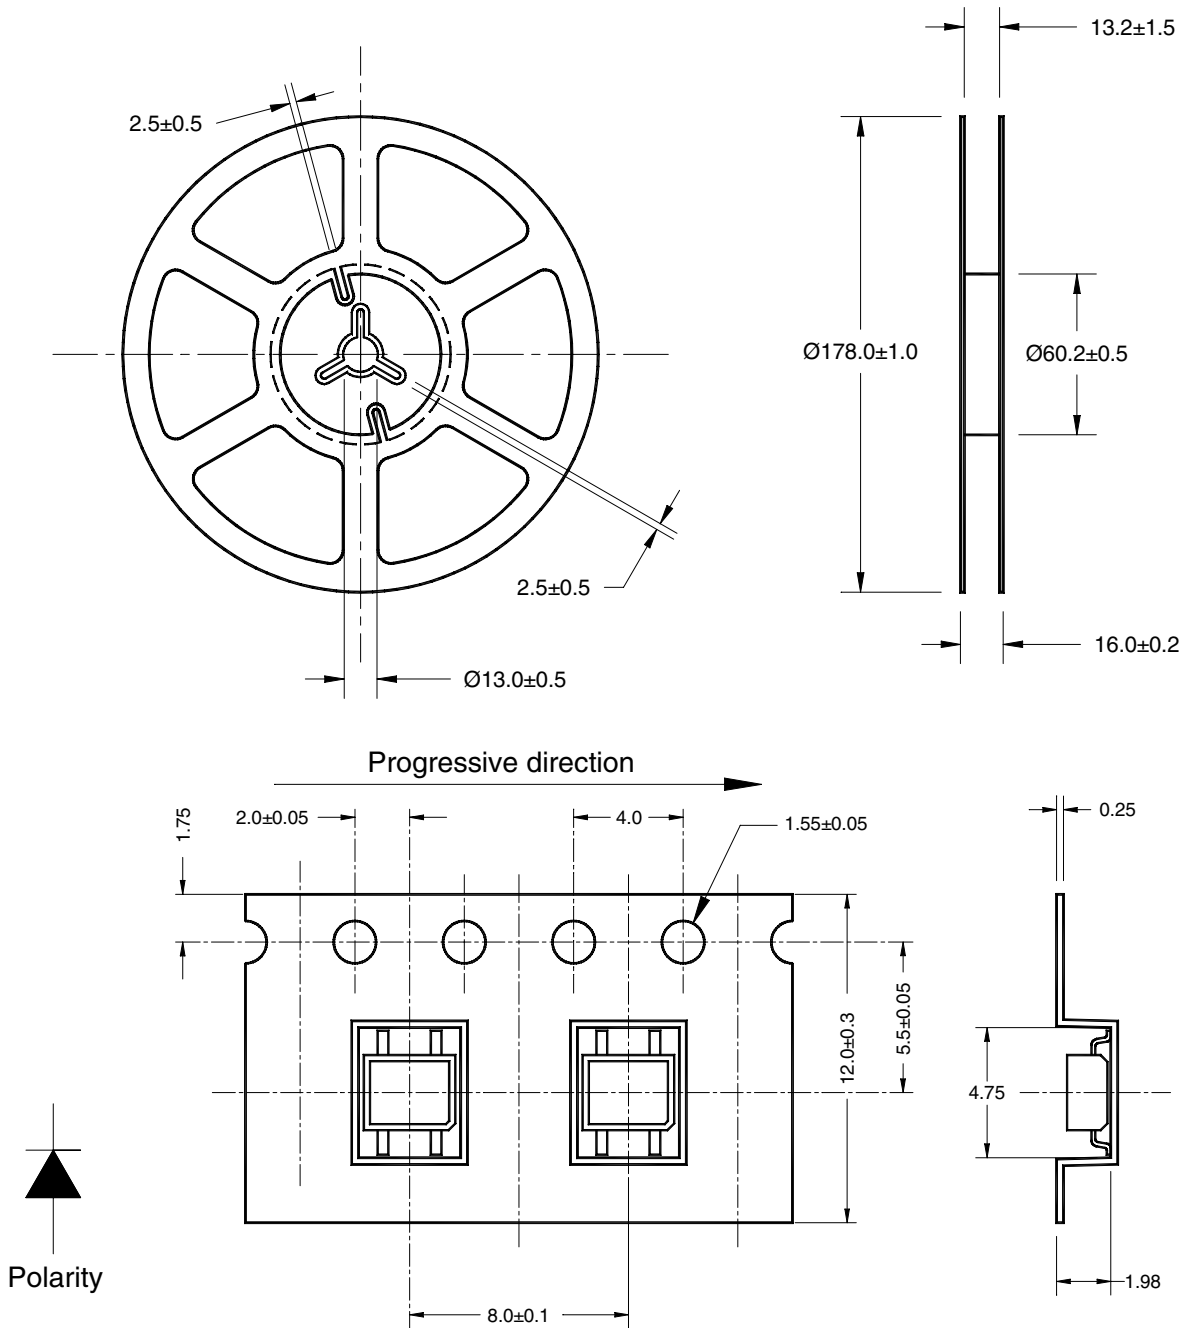

Dimensional tolerance is  $\pm 0.1$ mm unless otherwise specified  
Angle:  $\pm 0.5$   
Unit: mm

---

**QTLP680C-RY** Red/Yellow

**QTLP680C-RAG** Red/Yellow-Green

---

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.