

74ALVCH245 Low Voltage Bidirectional Transceiver with Bushold

General Description

The ALVCH245 contains eight non-inverting bidirectional buffers with 3-STATE outputs and is intended for bus oriented applications. The T/R input determines the direction of data flow. The OE input disables both the A and B Ports by placing them in a high impedance state. The ALVCH245 data inputs include active bushold circuitry, eliminating the need for external pull-up resistors to hold unused or floating data inputs at a valid logic level.

The 74ALVCH245 is designed for low voltage (1.65V to 3.6V) V_{CC} applications.

The 74ALVCH245 is fabricated with an advanced CMOS technology to achieve high-speed operation while maintaining low CMOS power dissipation.

Features


- 1.65V to 3.6V V_{CC} supply operation
- Bushold on data inputs eliminates the need for external pull-up/pull-down resistors
- t_{PD}
 - 3.6 ns max for 3.0V to 3.6V V_{CC}
 - 4.2 ns max for 2.3V to 2.7V V_{CC}
 - 6 ns max for 1.65V to 1.95V V_{CC}
- Uses patented Quiet Series noise/EMI reduction circuitry
- Latchup conforms to JEDEC JED78
- ESD performance:
 - Human body model > 2000V
 - Machine model > 200V

Ordering Code:

| Order Number | Package Number | Package Description |
|---------------|----------------|---|
| 74ALVCH245WM | M20B | 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide |
| 74ALVCH245MTC | MTC20 | 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide |

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

Logic Symbol

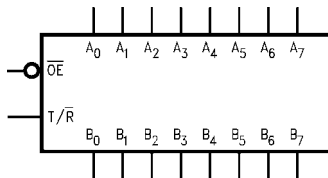


Pin Descriptions

| Pin Names | Description |
|--------------------------------|--|
| OE | Output Enable Input (Active LOW) |
| T/R | Transmit/Receive Input |
| A ₀ -A ₇ | Side A Bushold Inputs or 3-STATE Outputs |
| B ₀ -B ₇ | Side B Bushold Inputs or 3-STATE Outputs |

Quiet Series™ is a trademark of Fairchild Semiconductor Corporation.

Connection Diagram

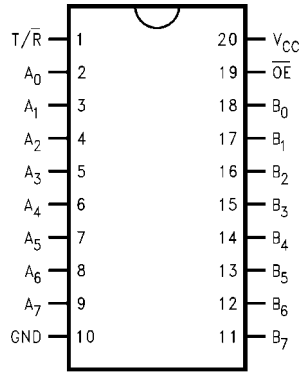


Truth Table

| Inputs | | Outputs |
|-----------------|------------------|---|
| \overline{OE} | $\overline{T/R}$ | |
| L | L | Bus B ₀ -B ₇ Data to Bus A ₀ -A ₇ |
| L | H | Bus A ₀ -A ₇ Data to Bus B ₀ -B ₇ |
| H | X | HIGH Z State on A ₀ -A ₇ , B ₀ -B ₇ |

H = HIGH Voltage Level
 L = LOW Voltage Level
 X = Immaterial
 Z = High Impedance

Logic Diagram

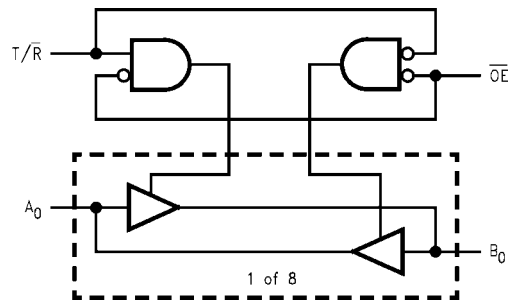

Absolute Maximum Ratings(Note 1)

| | |
|--|--------------------------|
| Supply Voltage (V_{CC}) | -0.5V to +4.6V |
| DC Input Voltage (V_I) | -0.5V to 4.6V |
| Output Voltage (V_O) (Note 2) | -0.5V to $V_{CC} + 0.5V$ |
| DC Input Diode Current (I_{IK}) | |
| $V_I < 0V$ | -50 mA |
| DC Output Diode Current (I_{OK}) | |
| $V_O < 0V$ | -50 mA |
| DC Output Source/Sink Current (I_{OH}/I_{OL}) | ±50 mA |
| DC V_{CC} or GND Current per Supply Pin (I_{CC} or GND) | ±100 mA |
| Storage Temperature Range (T_{STG}) | -65°C to +150°C |

Recommended Operating Conditions (Note 3)

| | |
|---|----------------|
| Power Supply | |
| Operating | 1.65V to 3.6V |
| Input Voltage (V_I) | 0V to V_{CC} |
| Output Voltage (V_O) | 0V to V_{CC} |
| Free Air Operating Temperature (T_A) | -40°C to +85°C |
| Minimum Input Edge Rate ($\Delta t/\Delta V$) | |
| $V_{IN} = 0.8V$ to $2.0V$, $V_{CC} = 3.0V$ | 10 ns/V |

Note 1: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: I_O Absolute Maximum Rating must be observed, limited to 4.6V.

Note 3: Floating or unused control inputs must be held HIGH or LOW.

DC Electrical Characteristics

| Symbol | Parameter | Conditions | V_{CC} (V) | Min | Max | Units |
|-----------------|--|----------------------------------|---------------------------------------|------------------------------------|------------------------------------|-------|
| V_{IH} | HIGH Level Input Voltage | | 1.65 - 1.95 2.3 - 2.7 2.7 - 3.6 | $0.65 \times V_{CC}$ 1.7 2.0 | | V |
| V_{IL} | LOW Level Input Voltage | | 1.65 - 1.95 2.3 - 2.7 2.7 - 3.6 | | $0.35 \times V_{CC}$ 0.7 0.8 | V |
| V_{OH} | HIGH Level Output Voltage | $I_{OH} = -100 \mu A$ | 1.65 - 3.6 | $V_{CC} - 0.2$ | | V |
| | | $I_{OH} = -4 \text{ mA}$ | 1.65 | 1.2 | | |
| | | $I_{OH} = -6 \text{ mA}$ | 2.3 | 2.0 | | |
| | | $I_{OH} = -12 \text{ mA}$ | 2.3 2.7 3.0 | 1.7 2.2 2.4 | | |
| | | $I_{OH} = -24 \text{ mA}$ | 3.0 | 2 | | |
| V_{OL} | LOW Level Output Voltage | $I_{OL} = 100 \mu A$ | 1.65 - 3.6 | | 0.2 | V |
| | | $I_{OL} = 4 \text{ mA}$ | 1.65 | | 0.45 | |
| | | $I_{OL} = 6 \text{ mA}$ | 2.3 | | 0.4 | |
| | | $I_{OL} = 12 \text{ mA}$ | 2.3 2.7 | | 0.7 0.4 | |
| | | $I_{OL} = 24 \text{ mA}$ | 3.0 | | | |
| I_I | Input Leakage Current | $0 \leq V_I \leq 3.6V$ | 3.6 | | ±5.0 | μA |
| $I_{I(HOLD)}$ | Bushold Input Minimum Drive Hold Current | $V_{IN} = 0.58V$ | 1.65 | 25 | | μA |
| | | $V_{IN} = 1.07V$ | 1.65 | -25 | | |
| | | $V_{IN} = 0.7V$ | 2.3 | 45 | | |
| | | $V_{IN} = 1.7V$ | 2.3 | -45 | | |
| | | $V_{IN} = 0.8V$ | 3.0 | 75 | | |
| | $V_{IN} = 2.0V$ | 3.0 | -75 | | | |
| | $0 < V_O \leq 3.6V$ | 3.6 | | ±500 | | |
| I_{OZ} | 3-STATE Output Leakage | $0 \leq V_O \leq 3.6V$ | 3.6 | | ±10 | μA |
| I_{CC} | Quiescent Supply Current | $V_I = V_{CC}$ or GND, $I_O = 0$ | 3.6 | | 10 | μA |
| ΔI_{CC} | Increase in I_{CC} per Input | $V_{IH} = V_{CC} - 0.6V$ | 3 - 3.6 | | 750 | μA |

AC Electrical Characteristics

| Symbol | Parameter | $T_A = -40^\circ\text{C to } +85^\circ\text{C}, R_L = 500\Omega$ | | | | | | | | Units |
|--------------------|---------------------|--|-----|-----------------|-----|--------------------------|-----|---------------------------|-----|-------|
| | | $C_L = 50\text{ pF}$ | | | | $C_L = 30\text{ pF}$ | | | | |
| | | $V_{CC} = 3.3V \pm 0.3V$ | | $V_{CC} = 2.7V$ | | $V_{CC} = 2.5V \pm 0.2V$ | | $V_{CC} = 1.8V \pm 0.15V$ | | |
| | | Min | Max | Min | Max | Min | Max | Min | Max | |
| t_{PHL}, t_{PLH} | Propagation Delay | 1.3 | 3.6 | | 4.2 | 1.0 | 3.7 | 1.5 | 6.0 | ns |
| t_{PZL}, t_{PZH} | Output Enable Time | 1.6 | 5.5 | | 6.3 | 2.0 | 6.0 | 2.9 | 8.6 | ns |
| t_{PLZ}, t_{PHZ} | Output Disable Time | 1.7 | 5.5 | | 5.3 | 0.8 | 4.8 | 1.5 | 8.0 | ns |

Capacitance

| Symbol | Parameter | | Conditions | $T_A = +25^\circ\text{C}$ | | Units |
|-----------|-------------------------------|------------------|---|---------------------------|---------|-------|
| | | | | V_{CC} | Typical | |
| C_{IN} | Input Capacitance | Control | $V_I = 0V$ or V_{CC} | 3.3 | 4.5 | pF |
| $C_{I/O}$ | Input/Output Capacitance | A or B Ports | $V_I = 0V$ or V_{CC} | 3.3 | 12 | pF |
| C_{PD} | Power Dissipation Capacitance | Outputs Enabled | $f = 10\text{ MHz}, C_L = 0\text{ pF}$ | 3.3 | 31 | pF |
| | | | | 2.5 | 28 | |
| | | | | 1.8 | 25 | |
| | | Outputs Disabled | $f = 10\text{ MHz}, C_L = 50\text{ pF}$ | 3.3 | 0 | |
| | | | | 2.5 | 0 | |
| | | | | 1.8 | 0 | |

AC Loading and Waveforms

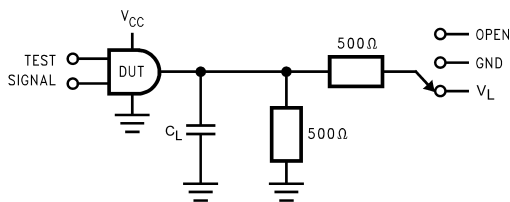


FIGURE 1. AC Test Circuit

TABLE 1. Values for Figure 1

| TEST | SWITCH |
|-----------------------|--------|
| t_{PLH} , t_{PHL} | Open |
| t_{PZL} , t_{PLZ} | V_L |
| t_{PZH} , t_{PHZ} | GND |

TABLE 2. Variable Matrix
(Input Characteristics: $f = 1\text{MHz}$; $t_r = t_f = 2\text{ns}$; $Z_0 = 50\Omega$)

| Symbol | V_{CC} | | | |
|----------|-------------------------------|------------------------|-------------------------------|--------------------------------|
| | $3.3\text{V} \pm 0.3\text{V}$ | 2.7V | $2.5\text{V} \pm 0.2\text{V}$ | $1.8\text{V} \pm 0.15\text{V}$ |
| V_{mi} | 1.5V | 1.5V | $V_{CC}/2$ | $V_{CC}/2$ |
| V_{mo} | 1.5V | 1.5V | $V_{CC}/2$ | $V_{CC}/2$ |
| V_x | $V_{OL} + 0.3\text{V}$ | $V_{OL} + 0.3\text{V}$ | $V_{OL} + 0.15\text{V}$ | $V_{OL} + 0.15\text{V}$ |
| V_y | $V_{OH} - 0.3\text{V}$ | $V_{OH} - 0.3\text{V}$ | $V_{OH} - 0.15\text{V}$ | $V_{OH} - 0.15\text{V}$ |
| V_L | 6V | 6V | $V_{CC} * 2$ | $V_{CC} * 2$ |

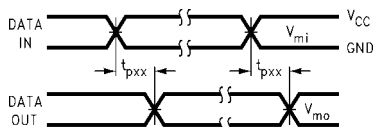


FIGURE 2. Waveform for Inverting and Non-inverting Functions

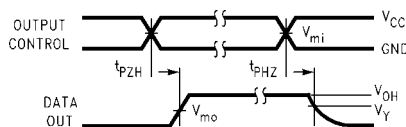


FIGURE 3. 3-STATE Output High Enable and Disable Times for Low Voltage Logic


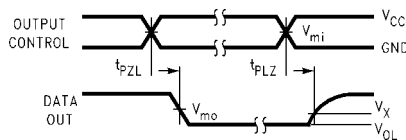






FIGURE 4. 3-STATE Output Low Enable and Disable Times for Low Voltage Logic

Physical Dimensions inches (millimeters) unless otherwise noted

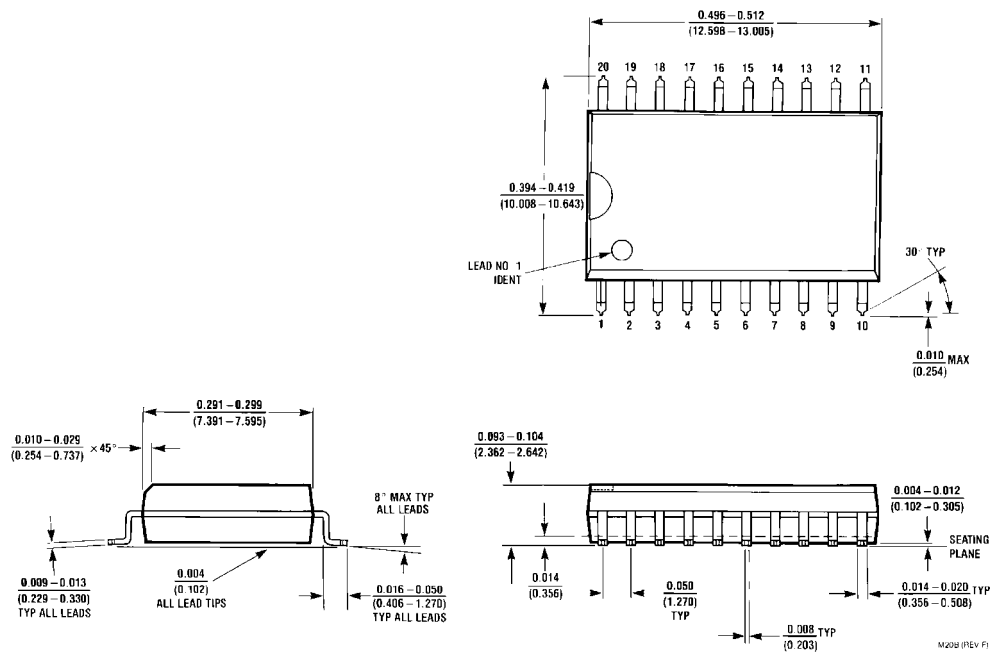

**20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide
Package Number M20B**

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

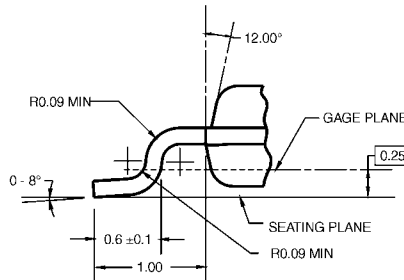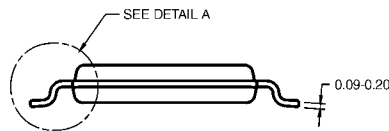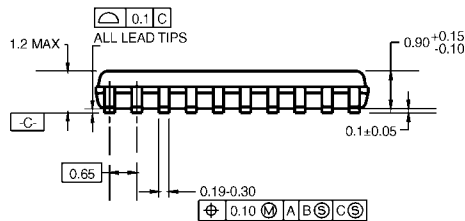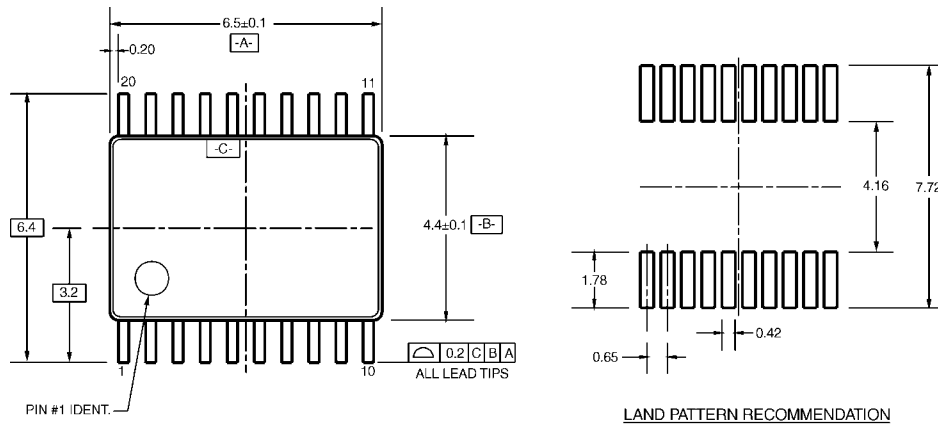

DIMENSIONS ARE IN MILLIMETERS

NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AC, REF NOTE 6, DATE 7/93.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

MTC20RevD1

**20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide
Package Number MTC20**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com