


# G3A THRU G3M

## GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 3.0 Amperes

**PATENTED\***

Case Style G3

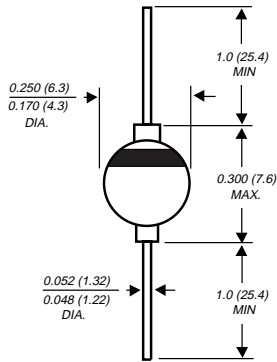

Dimensions in inches and (millimeters)

\* Brazed-lead assembly is covered by Patent No. 3,930,306

### FEATURES

- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Hermetically sealed package
- ◆ 3.0 Ampere operation at  $T_A=70^\circ\text{C}$  with no thermal runaway
- ◆ Typical  $I_R$  less than  $0.1\mu\text{A}$
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ High temperature soldering guaranteed:  $350^\circ\text{C}/10$  seconds,  $0.375"$  (9.5mm) lead length, 5 lbs. (2.3kg) tension



### MECHANICAL DATA

**Case:** Solid glass body

**Terminals:** Solder plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.1 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

	SYMBOLS	G3A	G3B	G3D	G3G	G3J	G3K	G3M	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=70^\circ\text{C}$	$I_{(AV)}$	3.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	125.0							Amps
Maximum instantaneous forward voltage at 3.0A	$V_F$	1.2	1.1					Volts	
Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead length at $T_A=70^\circ\text{C}$	$I_{R(AV)}$	200.0							$\mu\text{A}$
Maximum DC reverse current at rated DC blocking voltage	$I_R$	5.0 100.0							$\mu\text{A}$
Typical reverse recovery time (NOTE 1)	$t_{rr}$	3.0							$\mu\text{s}$
Typical junction capacitance (NOTE 2)	$C_J$	40.0							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$ $R_{\theta JL}$	20.0 10.0							$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +175							$^\circ\text{C}$

**NOTES:**

(1) Measured with  $I_F=0.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{rr}=0.25\text{A}$

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length, with both leads mounted between heatsinks

# RATINGS AND CHARACTERISTIC CURVES G3A AND G3M

FIG. 1 - FORWARD CURRENT DERATING CURVE

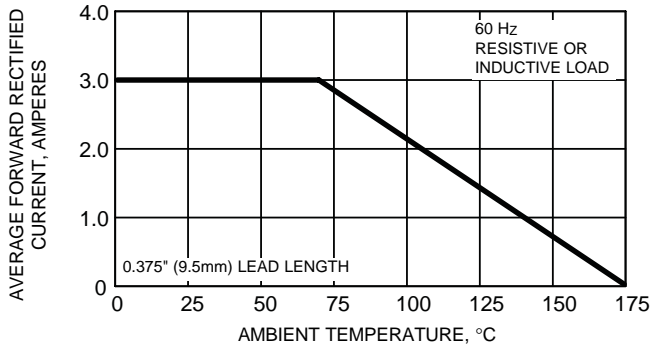


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

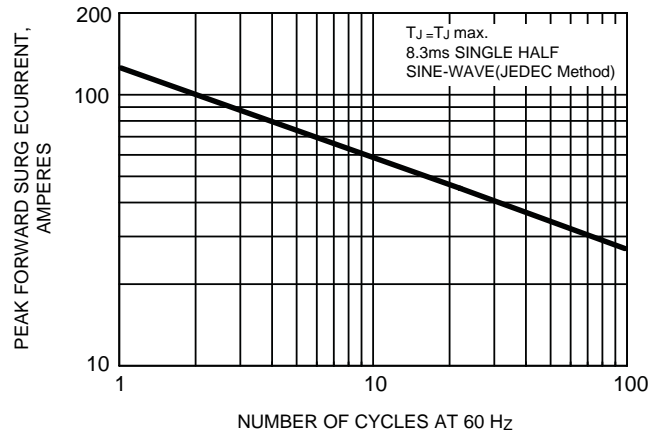


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

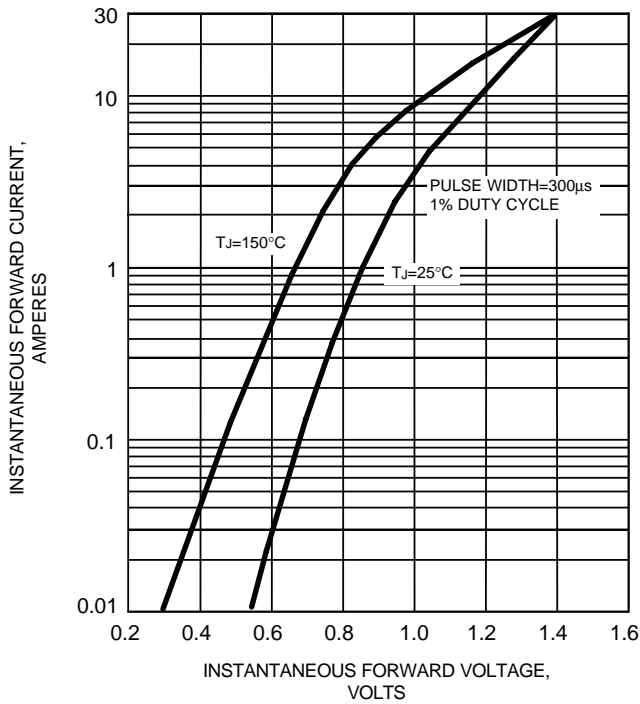


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

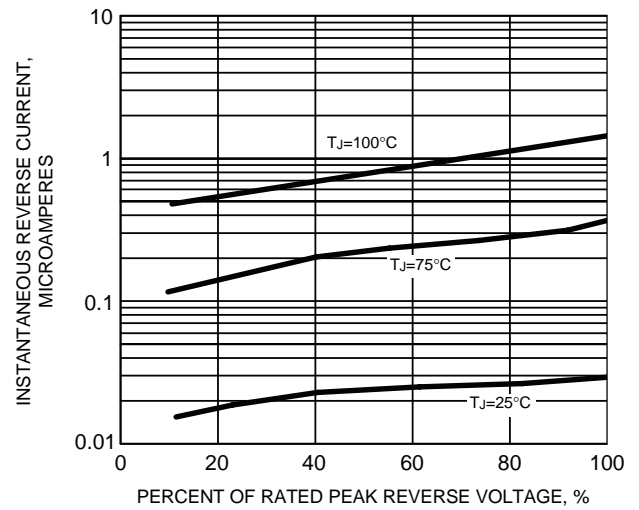


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

