




FR151 THRU FR157

FAST RECOVERY RECTIFIER
 Reverse Voltage - 50 to 1000 Volts
 Forward Current - 1.5 Amperes

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Construction utilizes void-free molded plastic technique
- 1.5 ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375"(9.5mm) lead length, 5 lbs. (2.3kg) tension

DO-15

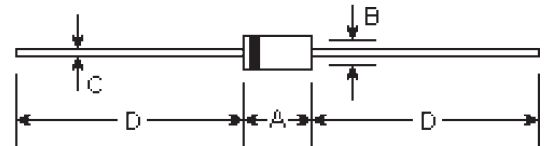

Mechanical Data

- **Case:** DO-15 molded plastic body
- **Terminals:** Plated axial leads, solderable per MIL-STD-750, method 2026
- **Polarity:** Color band denotes cathode end
- **Mounting Position:** Any
- **Weight:** 0.014 ounce, 0.39 gram

DIM	DIMENSIONS				Note
	inches		mm		
	Min.	Max.	Min.	Max.	
A	0.228	0.299	5.8	7.6	
B	0.102	0.142	2.6	3.6	φ
C	0.028	0.034	0.71	0.86	φ
D	1.000	-	25.40	-	

Maximum Ratings and Electrical Characteristics @25°C unless otherwise specified


	Symbols	FR151	FR152	FR153	FR154	FR155	FR156	FR157	FR157-STR	Units
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1000	Volts
Average forward rectified current at $T_A=55^\circ\text{C}$	$I_{(AV)}$	1.5								Amps
Peak forward surge current 8.3ms single half sine-wave (MIL-STD-750D 4066 method)	I_{FSM}	60.0								Amps
Maximum instantaneous forward voltage at $I_{FM}=1.5\text{A}$, $T_A=25^\circ\text{C}$ (Note 3)	V_F	1.3								Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ / $T_A=100^\circ\text{C}$	I_R	5.0 / 100.0								μA
Maximum reverse recovery time (Note 1)	T_{rr}	150				250	500	250		nS
Typical junction capacitance (Note 2)	C_J	20.0								pF
Operating and storage temperature range	T_J, T_{STG}	-65 to +175								°C

Notes:

- (1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
- (2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts
- (3) Pulse test: pulse width 300uSec, Duty cycle 1%


RATINGS AND CHARACTERISTIC CURVES

Figure 1
Typical Forward Characteristics

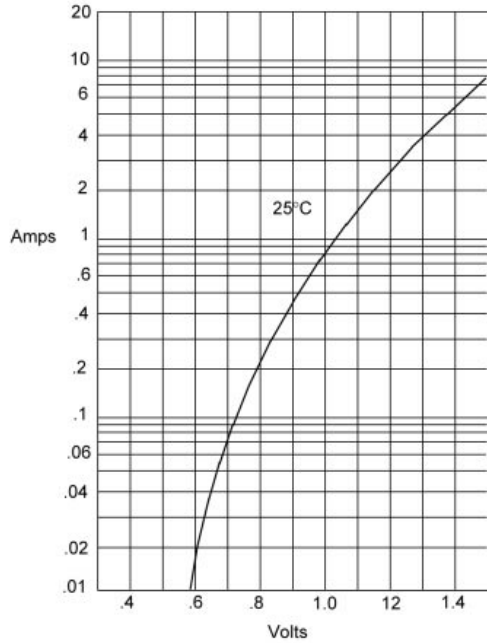


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

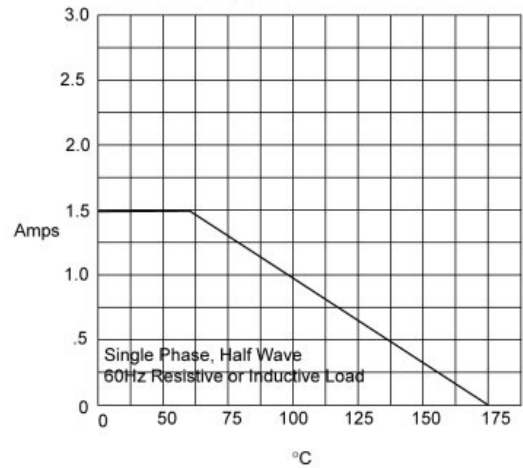

Average Forward Rectified Current - Amperes *versus*
Ambient Temperature - °C

Figure 3
Junction Capacitance

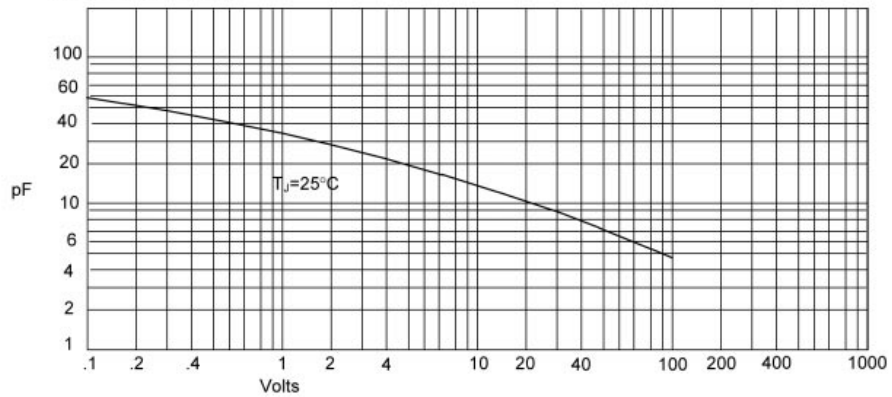

Junction Capacitance - pF *versus*
Reverse Voltage - Volts

RATINGS AND CHARACTERISTIC CURVES

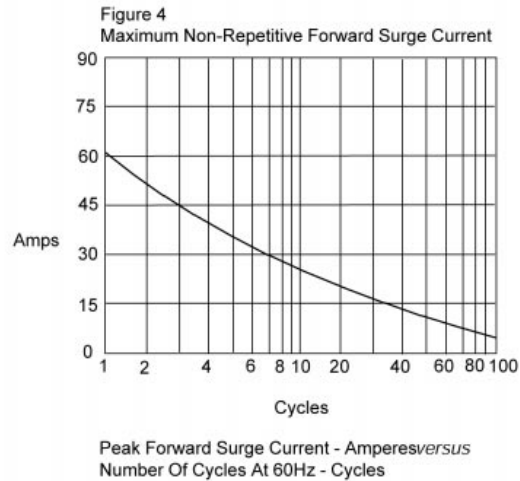


Figure 5
Reverse Recovery Time Characteristic And Test Circuit Diagram

