




## T-1 Subminiature Lamps



| Line No. | Part No. Wire Lead | Part No. Miniature Flanged | Part No. Bi-Pin | Volts | Amps  | M.S.C.P. | Filament Type | Life Hours |
|----------|--------------------|----------------------------|-----------------|-------|-------|----------|---------------|------------|
| 17       | 8798               | 7244                       | 7252            | 1.25  | 0.012 | 0.004    | C-6           | 1,000      |
| 18       | 8910               | 7245                       | 7253            | 1.35  | 0.220 | 0.02     | C-2R          | 10,000     |
| 19       | 7200               | 7225                       | 3225            | 1.5   | 0.010 | 0.002    | C-2R          | 2,000      |
| 20       | <b>7201</b>        | 7226                       | 7254            | 1.5   | 0.015 | 0.005    | C-2R          | 1,000      |
| 21       | 7203               | <b>8102</b>                | 7255            | 1.5   | 0.075 | 0.03     | C-2R          | 16,000     |
| 22       | 801                | —                          | —               | 2.4   | 0.145 | 0.18     | C-2R          | 3,000      |
| 23       | 8601               | <b>7246</b>                | 7256            | 2.5   | 0.015 | 0.001    | C-2R          | 10,000     |
| 24       | <b>8732</b>        | 7247                       | 7732            | 2.5   | 0.100 | 0.10     | C-2R          | 10,000     |
| 25       | <b>8711</b>        | 7248                       | <b>7257</b>     | 2.5   | 0.320 | 0.21     | C-2R          | 5,000      |
| 26       | 8846               | 7249                       | 7258            | 3.0   | 0.008 | 0.001    | C-2R          | 16,000     |
| 27       | <b>7205</b>        | 7229                       | 3229            | 3.0   | 0.015 | 0.02     | C-2R          | 5,000      |
| 28       | 7207               | 7231                       | 7260            | 3.0   | 0.060 | 0.03     | C-2R          | 100,000    |
| 29       | <b>7208</b>        | 7232                       | 7261            | 3.0   | 0.120 | 0.15     | C-2R          | 16,000     |
| 30       | 8602               | <b>8605</b>                | 7262            | 5.0   | 0.017 | 0.005    | C-2R          | 10,000     |
| 31       | <b>6022</b>        | 8022                       | 7022            | 5.0   | 0.021 | 0.034    | C-2R          | 10,000     |
| 32       | 7210               | 7234                       | <b>7263</b>     | 5.0   | 0.030 | 0.03     | C-2R          | 16,000     |
| 33       | 8729               | 7250                       | 7264            | 5.0   | 0.045 | 0.04     | C-2R          | 10,000     |
| 34       | <b>680</b>         | 682                        | 7680            | 5.0   | 0.060 | 0.03     | C-2R          | 100,000    |
| 35       | <b>683</b>         | 685                        | <b>7683</b>     | 5.0   | 0.060 | 0.05     | C-2R          | 100,000    |
| 36       | <b>6150</b>        | <b>6180</b>                | 7265            | 5.0   | 0.060 | 0.15     | C-2R          | 5,000      |
| 37       | <b>713</b>         | <b>714</b>                 | 7714            | 5.0   | 0.075 | 0.09     | C-2R          | 25,000     |
| 38       | 7211               | 7235                       | 7266            | 5.0   | 0.080 | 0.16     | C-2R          | 3,000      |
| 39       | <b>715</b>         | 718                        | <b>7715</b>     | 5.0   | 0.115 | 0.15     | C-2R          | 40,000     |
| 40       | 7213               | 7236                       | 7267            | 5.0   | 0.115 | 0.20     | C-2R          | 5,000      |
| 41       | 7216               | 7239                       | <b>7268</b>     | 5.0   | 0.125 | 0.22     | C-2R          | 5,000      |
| 42       | 8096               | 7251                       | 7269            | 5.0   | 0.145 | 0.16     | C-2R          | 10,000     |
| 43       | <b>7218</b>        | 7240                       | 8095            | 10.0  | 0.027 | 0.10     | C-2F          | 10,000     |
| 44       | —                  | <b>228</b>                 | —               | 12.0  | 0.040 | 0.13     | —             | 10,000     |
| 45       | <b>7219</b>        | <b>32</b>                  | <b>8097</b>     | 12.0  | 0.060 | 0.15     | C-2F          | 16,000     |
| 46       | <b>8111</b>        | <b>8112</b>                | <b>8098</b>     | 14.0  | 0.065 | 0.15     | C-2F          | 16,000     |
| 47       | <b>7220</b>        | 7241                       | <b>8099</b>     | 18.0  | 0.026 | 0.15     | C-2F          | 16,000     |
| 48       | <b>6838</b>        | <b>6839</b>                | <b>7839</b>     | 28.0  | 0.024 | 0.15     | CC-2F         | 16,000     |

T-3/4 Bi-Pin

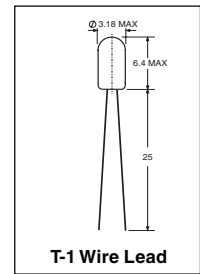

## T-1 Subminiature Short Type Lamps

| Line No. | Part No. | Volts | Amps  | M.S.C.P. | Filament Type | Life Hours | Drawing |
|----------|----------|-------|-------|----------|---------------|------------|---------|
| 1        | 6802     | 5.0   | 0.060 | 0.03     | C-2R          | 200,000    | A       |
| 2        | 6802AS15 | 5.0   | 0.060 | 0.03     | C-2R          | 200,000    | A       |
| 3        | 6832     | 5.0   | 0.060 | 0.05     | C-2R          | 100,000    | A       |
| 4        | 6832AS15 | 5.0   | 0.060 | 0.05     | C-2R          | 100,000    | A       |
| 5        | 7132     | 5.0   | 0.075 | 0.09     | C-2R          | 40,000     | A       |
| 6        | 7132AS15 | 5.0   | 0.075 | 0.09     | C-2R          | 40,000     | A       |
| 7        | 7152     | 5.0   | 0.115 | 0.15     | C-2R          | 40,000     | A       |
| 8        | 7152AS15 | 5.0   | 0.115 | 0.15     | C-2R          | 40,000     | A       |
| 9        | 7009     | 28.0  | 0.020 | 0.15     | CC-2F         | 16,000     | A       |

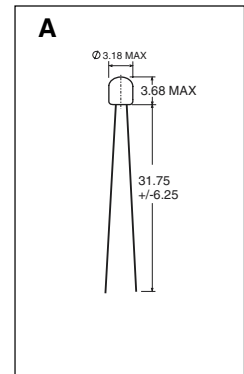

## T-1 Mini-Max Flashlight Lamps

| Line No. | Part No. | Volts | Amps  | M.S.C.P. | Life Hours | Filament Type | Base Type | Drawing |
|----------|----------|-------|-------|----------|------------|---------------|-----------|---------|
| 10       | L135     | 1.35  | 0.315 | 0.16     | 4          | C-6           | Bi-Pin    | B       |
| 11       | L250     | 2.5   | 0.300 | 0.6      | 4          | C-6           | Bi-Pin    | B       |
| 12       | L400     | 4.0   | 0.300 | 1.2      | 4          | C-2R          | Bi-Pin    | B       |