

High optical power from a single chip

■ FEATURES

- High optical power & high radiant flux density(CW)
 - L8933 series : 0.5 W / 50 μm
 - L8446 series : 1 W / 100 μm
 - L8763 series : 1 W / 50 μm
 - L8828 series : 2 W / 100 μm
- High stability
- Long life
- Compact

■ APPLICATIONS

- Pumping source for solid state lasers
- Printing
- Medical instrument
- Measuring instrument
- Material Processing
- Marking



HAMAMATSU CW laser diodes, L8933, L8446, L8763, L8828 series feature high optical power of 0.5 to 2.0 W under CW operation. As this is single chip and single element type, emitting area is small (50 μm to 100 μm X 1 μm). Therefore, it is easy to focus on to a small spot with optics. It can be used for various applications such as pumping of solid lasers, printers, medical instruments etc.

CW LASER DIODES L8933 , L8446 , L8763 , L8828 SERIES

■ ABSOLUTE MAXIMUM RATINGS (Top(c) = 25 °C)

Parameter	Symbol	Value				Unit
		L8933	L8446	L8763	L8828	
Radiant Output Power	Φ_e	0.6	1.2	1.2	2.2	W
Reverse Voltage	V_r	2				V
Operating Temperature	$T_{op(c)}$	0 to +30				°C
Storage Temperature	T_{stg}	-30 to +80				°C

■ CHARACTERISTICS (Top(c) = 25 °C)

Parameter	Symbol	Conditions	Value				Unit
			L8933	L8446	L8763	L8828	
Radiant Output Power	Φ_e	-	0.5	1	1	2	W
Forward Current	I_f	L8933 $\Phi_e = 0.5$ W	0.65	1.2	1.2	2.4	A
Peak Emission Wavelength	λ_p	L8763 $\Phi_e = 1$ W	808 ± 3 , 808 ± 5 , 808 ± 10 *1				nm
Spectral Radiation Half Bandwidth	$\Delta\lambda$	L8446 $\Phi_e = 1$ W	2				nm
Forward Voltage	V_f	L8828 $\Phi_e = 2$ W	2				V
Emitting Area Size	-	Value at designing	50 x 1	100 x 1	50 x 1	100 x 1	μm
Beam Spread Angle	Parallel	FWHM	8				degree
	Vertical		32				degree
Lasing Threshold Current	I_{th}	-	0.15	0.35	0.35	0.6	A

*1 Tolerance of of peak emission wavelength can be selected from +/- 3nm, +/- 5nm and +/- 10nm for every type of laser diodes listed above. For its details, see the table of SUFFIX in the next page.

Other laser diodes of different peak emission wavelength are available, such as 830nm, 940nm and 980nm. Contact your local representative for more information.

Figure 1: Radiant Output Power vs. Forward Current (Typ.)

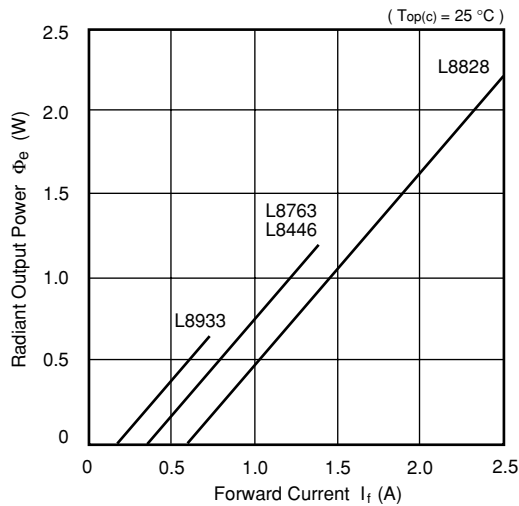


Figure 2: Emission Spectrum (Typ.)


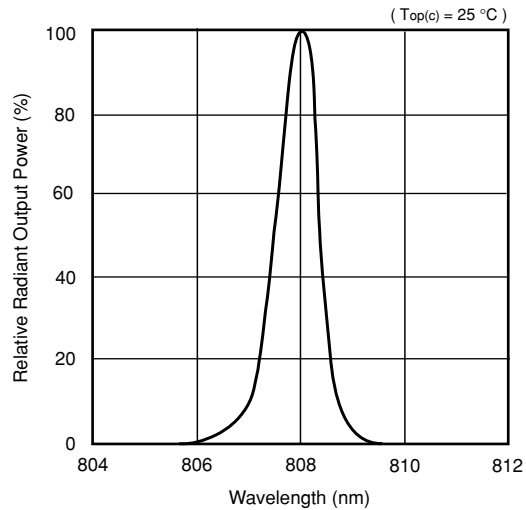


Figure 3: Directivity (Typ.)

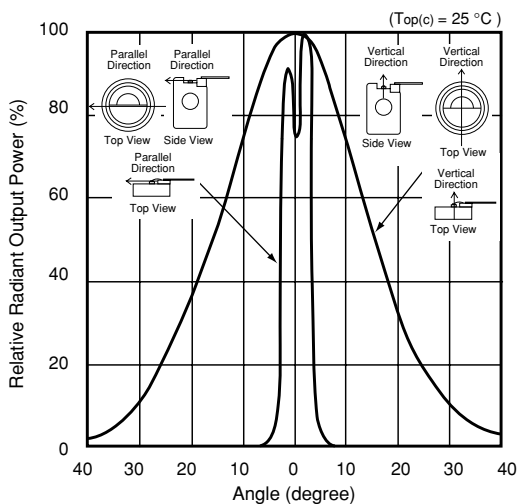

■ SUFFIX / DIMENSIONAL OUTLINE (Unit : mm)


Parameter	Suffix								
	L####-04	L####-41	L####-42	L####-06	L####-61	L####-62	L####-07	L####-71	L####-72
Peak Emission Wavelength (nm)	808 ± 3	808 ± 5	808 ± 10	808 ± 3	808 ± 5	808 ± 10	808 ± 3	808 ± 5	808 ± 10
Package	φ 9.0 CD			Side-out OHS			Head-out OHS		
Dimensional Outline	①			②			③		

* φ9.0CD package is not available with 2W type L8288 series.
Pigtailed type is available as custom option. Contact your local representative for details.

① φ 9.0 CD Package




L8933-04, L8446-04, L8763-04
L8933-41, L8446-41, L8763-41
L8933-42, L8446-42, L8763-42

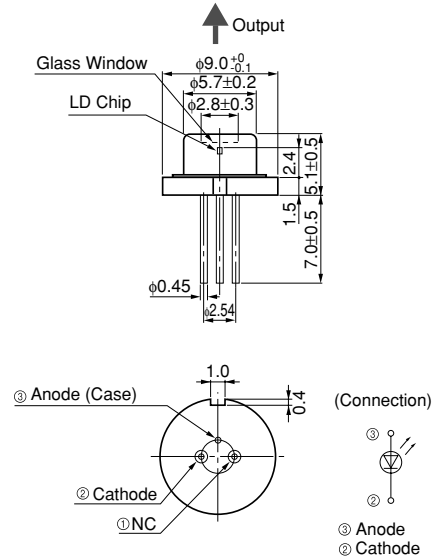

② Side-out OHS Package




L8933-06, L8446-06, L8763-06, L8828-06
L8933-61, L8446-61, L8763-61, L8828-61
L8933-62, L8446-62, L8763-62, L8828-62

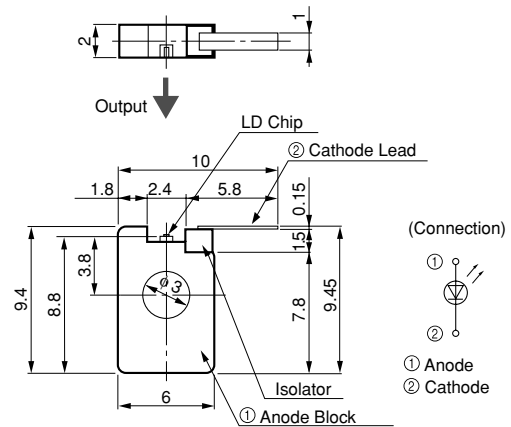

③ Head-out OHS Package



L8933-07, L8446-07, L8763-07, L8828-07
L8933-71, L8446-71, L8763-71, L8828-71
L8933-72, L8446-72, L8763-72, L8828-72

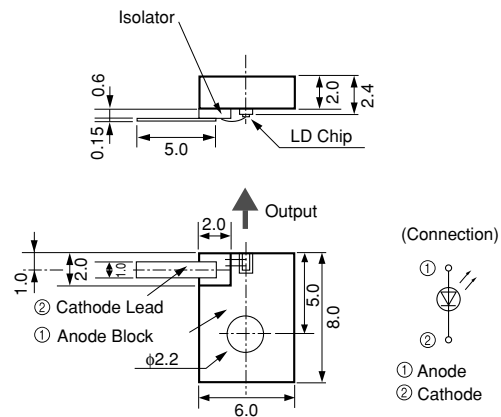

■ Handling precautions & instructions

1. Absolute maximum ratings

When LDs are driven exceeding its absolute maximum ratings, it will be broken instantly or it leads to degradation of performance & reliability. Please be careful not to exceed absolute maximum ratings even only a moment. The absolute maximum ratings in this datasheet are specified based on case temperature at 25 °C. When the operating temperature is higher, the radiant output power & dissipation will be reduced and it affects other characteristics. When designing the operating circuitry for LDs, please surely take absolute maximum ratings into account.

2. Protection of electrostatic discharge sensitive (ESDS) devices

The LDs may be damaged or its performance may deteriorate due to such factors as electric field, electrostatic discharges (ESD), surge voltage, leakage voltage etc. As a countermeasure against ESD, the device, operator, work place and jigs must all be set at the same electric potential. When handling LDs, please wear conductive finger-cap. And please take following countermeasures ;

- (1) Install protection circuit for excess voltage, reverse voltage, surge voltage into power supply, measuring instrument etc.
- (2) When using soldering iron, protect LDs from leakage current & electrostatic discharge from soldering iron bit.
- (3) Conductive sheet, electrically grounded through 1Mohm resistor should be laid on both the work table and the floor of the working area. In order to protect the device from ESD which accumulate on the operator or the operator s clothes, ground electrically through 1Mohm resistor and wear a wrist strap etc.
- (4) Goods like parts, container to contact / approach to LDs should be materials which is taken a countermeasures for ESD.

3. Protection for stain, stress, external damage, etc.

The LDs whose suffix -06 & -07 are bare type product, vital & fragile part is naked. Dusts, expiration, finger print, sputum, condensation bending, chip off of LD chip, re-forming of wire may leads to degradation of performance of the LDs. Please unpack, keep, handle, operate, drive in air-conditioned clean room so that the LDs are keep away from dust & condensation. When handling, please take enough care not to drop, not to stain any part of LDs. When dropped or stained, do not use it.

4. Heat dissipation

Reliability of LDs is deeply correlated with junction temperature. Under higher operating temperature, the reliability deteriorates sooner. Heat dissipating device (material: Aluminum, Copper) should be attached to the base of LDs, and cooling devices (air, water, peltier etc.) should be operate with the LDs in order to dissipate the heat from the LDs, so that the operating temperature is kept within the absolute maximum ratings.

5. Safety for operators and users

These LDs emit invisible laser radiation. It s classified into Class 4 according to the laser product standards of the IEC 60825-1 (Safety of laser products Part 1: Equipment classification, requirements and user s guide) and/or ANSI Z136.1 (American National Standard for Safe Use of Lasers) etc. Direct or reflected laser beam from these LDs may damage eyes or skin by being absorbed by cells. In the worst case, it leads to burn or loss of eyesight. The operator must not stare the emitting area of LDs, must avoid direct exposure to the laser beam. Wear eye-protectors (glasses or goggles) against laser radiation while operating a device. Please provide adequate information to the end-user of its classification, performances and warnings of the products using these LDs, defying the regulations of IEC 60825-1 and/or ANSI Z136.1 etc.

HAMAMATSU

<http://www.hamamatsu.com>

HAMAMATSU PHOTONICS K.K., Laser Group, Sales Dept.

5000, Hirakuchi, Hamakita City, Shizuoka, 434-8601, Japan, Telephone: (81)53-584-0227, Fax: (81)53-584-0228, E-mail: laser-g@lsr.hpk.co.jp

U.S.A.: Hamamatsu Corporation:360 Foothill Road, P.O. BOX 6910, Bridgewater, N.J. 08807-0910, U.S.A.Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33(1) 69 53 71 00, Fax: 33(1) 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44)1707-294888, Fax: (44)1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidsv gen 12, SE-171-41 Solna, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741, E-mail: info@hamamatsu.it

Cat. No. LLD1010E01

JAN. 2003 IP

Printed in Japan (500)