

SCHOTTKY RECTIFIER

2 Amp


Major Ratings and Characteristics

Characteristics	20CJQ060	Units
I _{F(AV)} Rectangular waveform	2.0	A
V _{RRM}	60	V
I _{FSM} @ t _p = 5μs sine	385	A
V _F @ 1.0Apk, T _J = 125°C (per leg)	0.56	V
T _J	-55 to 150	°C

Description / Features

The 20CJQ060 surface-mount Schottky rectifier has been designed for applications requiring very low forward drop and very small foot prints. Typical applications are in portables, switching power supplies, converters, automotive systems, free-wheeling diodes, battery charging and reverse battery protection.

- Small footprint, surface mountable
- Low profile
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long-term reliability
- Common Cathode

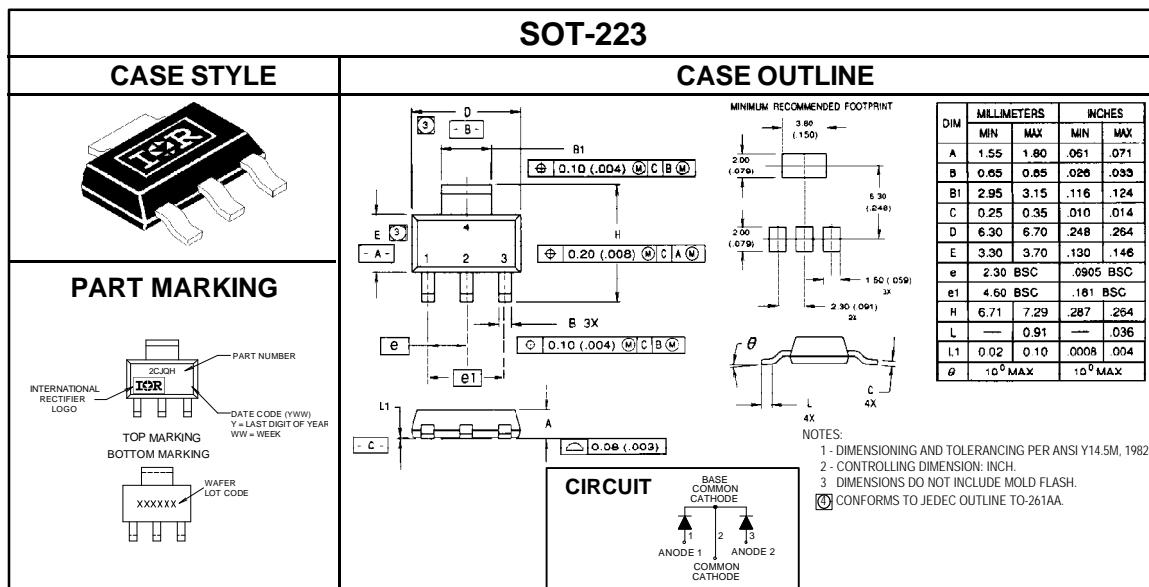

20CJQ060



Voltage Ratings

Part number	20CJQ060		
V_R Max. DC Reverse Voltage (V)	60		
V_{RWM} Max. Working Peak Reverse Voltage (V)			

Absolute Maximum Ratings

Parameters		20CJQ	Units	Conditions
$I_{F(AV)}$	Max. Average Forward Current See Fig. 5	2.0	A	50% duty cycle @ $T_J = 127^\circ\text{C}$, rectangular waveform
		4.0		50% duty cycle @ $T_J = 109^\circ\text{C}$, rectangular waveform
I_{FSM}	Max. Peak One Cycle Non - Repetitive Surge Current (Per Leg) See Fig. 7	385	A	5μs Sine or 3μs Rect. pulse
		22		10ms Sine Or 6ms Rect. pulse
E_{AS}	Non - Repetitive Avalanche Energy (Per Leg)	10	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 1.0\text{A}$, $L = 20\text{mH}$
I_{AR}	Repetitive Avalanche Current (Per Leg)	1.0	A	Current decaying linearly to zero in 1μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters		20CJQ	Units		Conditions	
V_{FM} Max. Forward Voltage Drop (Per Leg) See Fig. 1	0.59	V	@ 1.0A	$T_J = 25^\circ\text{C}$		
	0.75	V	@ 2.0A			
	0.56	V	@ 1.0A	$T_J = 125^\circ\text{C}$		
	0.67	V	@ 2.0A			
I_{RM} Max. Reverse Leakage Current (Per Leg) See Fig. 2	0.1	mA	$T_J = 25^\circ\text{C}$	$V_R = \text{rated } V_R$		
	5.0	mA	$T_J = 125^\circ\text{C}$			
C_T	Max. Junction Capacitance (Per Leg)	60	pF	$V_R = 5\text{V}_{\text{DC}}$, (test signal range 100KHz to 1MHz) 25°C		
L_S	Typical Series Inductance (Per Leg)	6.0	nH	Measured lead to lead 5mm from package body		
dv/dt	Max. Voltage Rate of Change (Rated V_R)	10,000	V/μs			

Thermal-Mechanical Specifications

Parameters		20CJQ	Units	Conditions
T_J	Max.Junction Temperature Range	-55 to 150	°C	
T_{STG}	Max. Storage Temperature Range	-55 to 150	°C	
R_{thJA}	Max. Thermal Resistance, Junction to Ambient	65	°C/W	DC operation
R_{thJL}	Max. Thermal Resistance, Junction to Lead	25	°C/W	DC operation — see Fig. 4.
wt	Approximate Weight	0.13(.0045)	g (oz.)	
Case Style		SOT-223		

① Pulse Width < 300μs, Duty Cycle < 2%

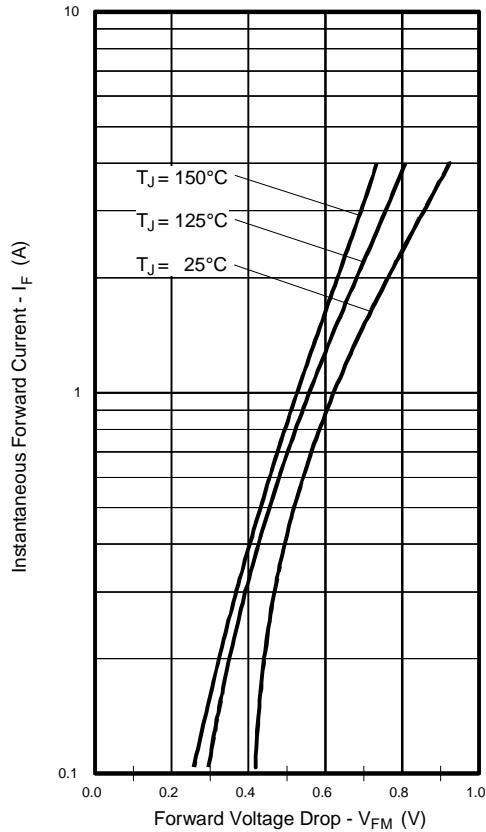


Fig. 1 Max. Forward Voltage Drop Characteristics (Per Leg)

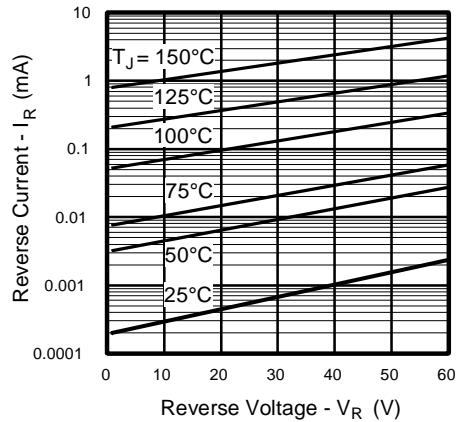


Fig. 2 Typical Values of Reverse Current Vs. Reverse Voltage (Per Leg)

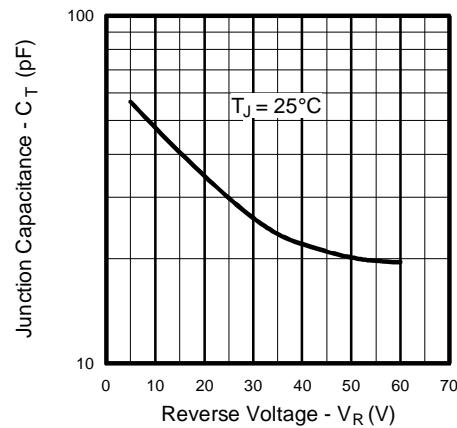


Fig. 3 Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

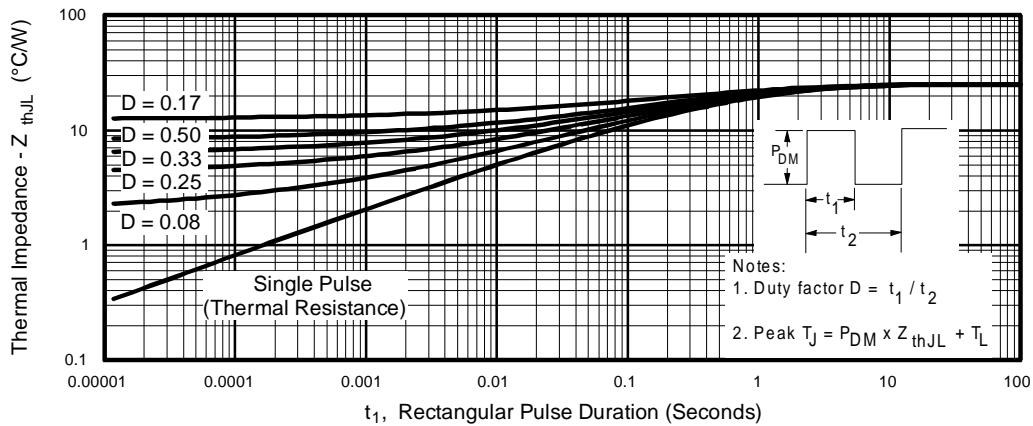


Fig. 4 Max. Thermal Impedance Z_{thJL} Characteristics (Per Leg)

20CJQ060

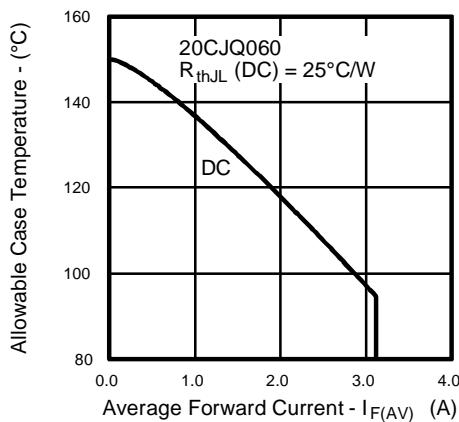


Fig. 5 Max. Allowable Case Temperature Vs.
Average Forward Current (Per Leg)

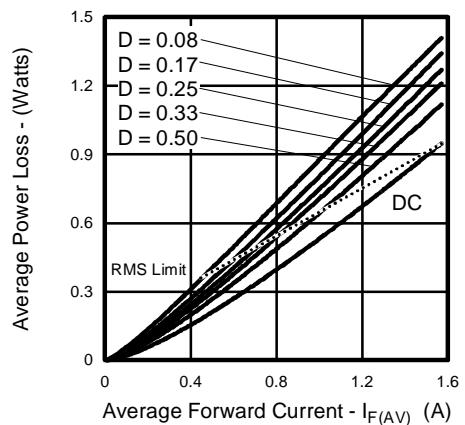


Fig. 6 Forward Power Loss Characteristics
(Per Leg)

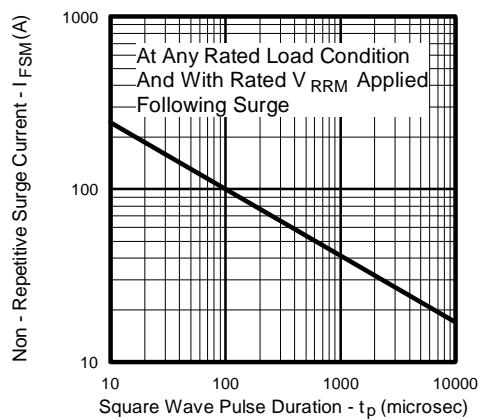


Fig. 7 Max. Non-Repetitive Surge Current (Per Leg)

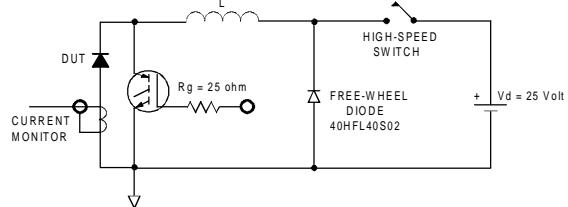


Fig. 8 Unclamped Inductive Test Circuit

Refer to the Appendix Section for the following:

Appendix D: Tape and Reel Information — See page 340.