



SD3000C..K SERIES

STANDARD RECOVERY DIODES

Hockey Puk Version

Features

- Wide current range
- High voltage ratings up to 1000V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style DO-200AC (K-PUK)

3800A

Typical Applications

- Converters
- Power supplies
- High power drives
- Auxiliary system supplies for traction applications



case style DO-200AC (K-PUK)

Major Ratings and Characteristics

| Parameters | SD3000C..K | Units |
|-----------------|-------------|-------------------|
| $I_{F(AV)}$ | 3800 | A |
| @ T_{hs} | 55 | °C |
| $I_{F(RMS)}$ | 6230 | A |
| @ T_{hs} | 25 | °C |
| I_{FSM} | 35800 | A |
| @ 50Hz | 37500 | A |
| I^2t | 6410 | KA ² s |
| @ 60Hz | 5850 | KA ² s |
| V_{RRM} range | 400 to 1000 | V |
| T_J | - 40 to 180 | °C |

SD3000C..K Series

ELECTRICAL SPECIFICATIONS

Voltage Ratings

| Type number | Voltage Code | V_{RRM} , maximum repetitive peak reverse voltage V | V_{RSM} , maximum non-repetitive peak rev. voltage V | I_{RRM} max. @ $T_J = 180^\circ\text{C}$ mA |
|-------------|--------------|---|--|--|
| SD3000C..K | 04 | 400 | 500 | 75 |
| | 08 | 800 | 900 | |
| | 10 | 1000 | 1100 | |

Forward Conduction

| Parameter | SD3000C..K | Units | Conditions | | | | | | | | |
|--|-------------|--------------------------|--|-----------------------------|--|--|--|--|--|--|--|
| $I_{F(AV)}$ @ Heatsink temperature | 3800 (1925) | A | 180° conduction, half sine wave | No voltage reapplied | Sinusoidal halfwave, Initial $T_J = T_J$ max. | | | | | | |
| | 55 (85) | °C | Double side (single side) cooled | | | | | | | | |
| $I_{F(RMS)}$ | 6230 | A | @ 25°C heatsink temperature double side cooled | 100% V_{RRM} reapplied | | | | | | | |
| I_{FSM} Max. peak, one-cycle forward, non-repetitive surge current | 35800 | A | t = 10ms | | | | | | | | |
| | 37500 | | t = 8.3ms | No voltage reapplied | | | | | | | |
| | 30100 | | t = 10ms | | | | | | | | |
| | 31500 | | t = 8.3ms | | | | | | | | |
| I^2t Maximum I^2t for fusing | 6410 | KA ² s | t = 10ms | 100% V_{RRM} reapplied | | | | | | | |
| | 5850 | | t = 8.3ms | | | | | | | | |
| | 4530 | | t = 10ms | | | | | | | | |
| | 4135 | | t = 8.3ms | | | | | | | | |
| $I^2\sqrt{t}$ | 64100 | KA ² \sqrt{s} | t = 0.1 to 10ms, no voltage reapplied | | | | | | | | |
| $V_{F(TO)1}$ Low level value of threshold voltage | 0.74 | V | $(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J$ max. | | | | | | | | |
| $V_{F(TO)2}$ High level value of threshold voltage | 0.86 | | $(I > \pi \times I_{F(AV)})$, $T_J = T_J$ max. | | | | | | | | |
| r_{f1} Low level value of forward slope resistance | 0.08 | mΩ | $(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J$ max. | | | | | | | | |
| r_{f2} High level value of forward slope resistance | 0.07 | | $(I > \pi \times I_{F(AV)})$, $T_J = T_J$ max. | | | | | | | | |
| V_{FM} | 1.22 | V | $I_{pk} = 6000A$, $T_J = T_J$ max, $t_p = 10ms$ sinusoidal wave | | | | | | | | |

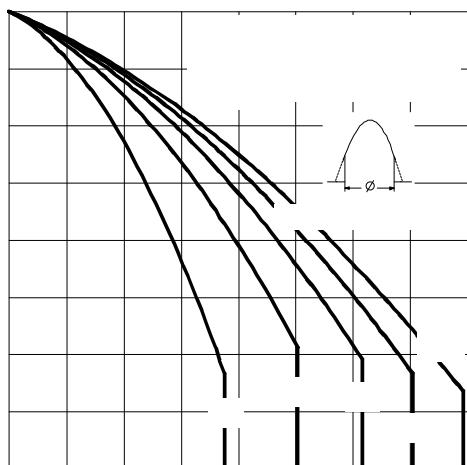


Fig. 3 - Current Ratings Characteristics

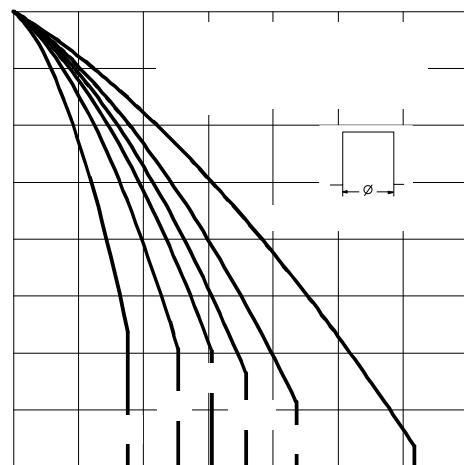


Fig. 4 - Current Ratings Characteristics

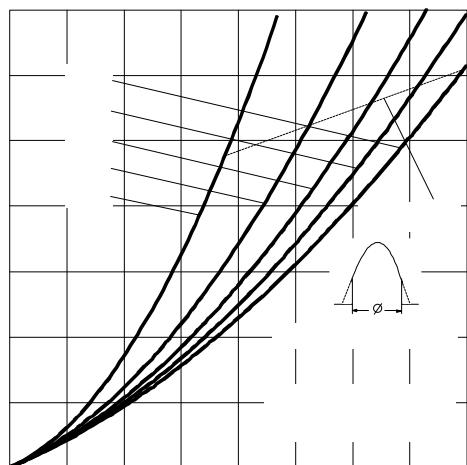


Fig. 5 - Forward Power Loss Characteristics

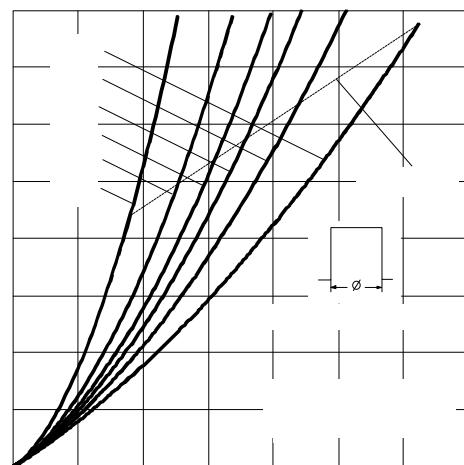


Fig. 6 - Forward Power Loss Characteristics

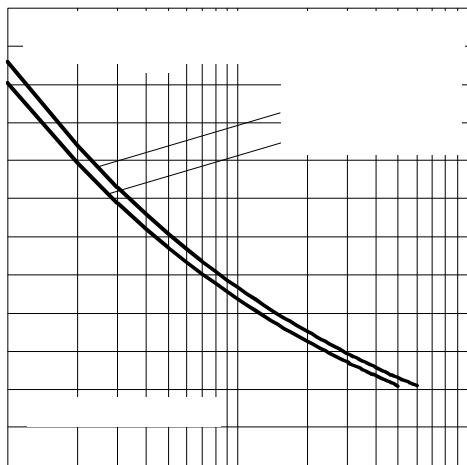


Fig. 7 - Maximum Non-Repetitive Surge Current

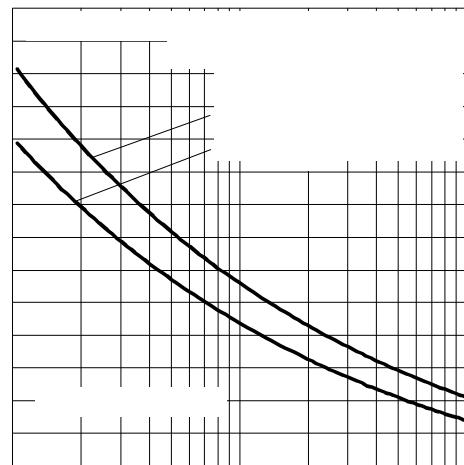


Fig. 8 - Maximum Non-Repetitive Surge Current

SD3000C..K Series

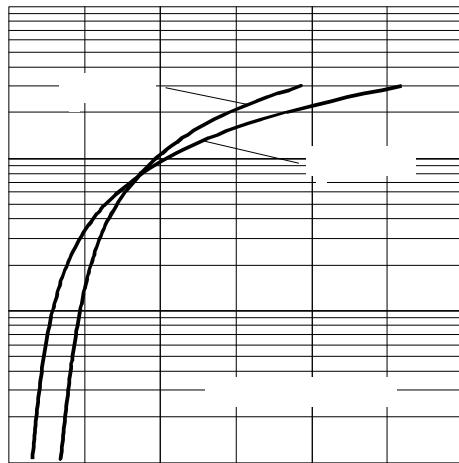


Fig. 9 - Forward Voltage Drop Characteristics

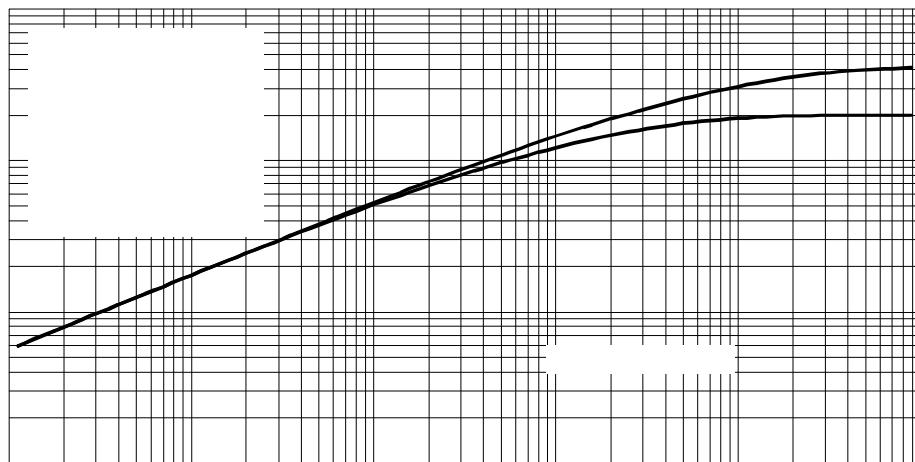


Fig. 10 - Thermal Impedance Z_{thJ-hs} Characteristics

Thermal and Mechanical Specifications

| Parameter | SD3000C..K | Units | Conditions |
|---------------------|---|-----------------|--------------------|
| T_J | Max. junction operating temperature range | -40 to 180 | $^{\circ}\text{C}$ |
| T_{stg} | Max. storage temperature range | -55 to 200 | |
| $R_{\text{thJ-hs}}$ | Max. thermal resistance, junction to heatsink | 0.042 0.020 | K/W |
| F | Mounting force, $\pm 10\%$ | 22250 (2250) | N (Kg) |
| wt | Approximate weight | 425 | g |
| | Case style | DO-200AC(K-PUK) | See Outline Table |

 $\Delta R_{\text{thJ-hs}}$ Conduction(The following table shows the increment of thermal resistance $R_{\text{thJ-hs}}$ when devices operate at different conduction angles than DC)

| Conduction angle | Sinusoidal conduction | | Rectangular conduction | | Units | Conditions |
|------------------|-----------------------|-------------|------------------------|-------------|-------|---------------------------|
| | Single Side | Double Side | Single Side | Double Side | | |
| 180° | 0.002 | 0.002 | 0.001 | 0.001 | K/W | $T_J = T_{\text{J max.}}$ |
| 120° | 0.002 | 0.002 | 0.002 | 0.002 | | |
| 90° | 0.003 | 0.003 | 0.003 | 0.003 | | |
| 60° | 0.004 | 0.004 | 0.004 | 0.004 | | |
| 30° | 0.007 | 0.007 | 0.007 | 0.007 | | |

Ordering Information Table

| Device Code | | SD 300 0 C 10 K | | | | | |
|-------------|---|---------------------------|---|---|---|--|--|
| 1 | 2 | 3 | 4 | 5 | 6 | | |
| 1 | - Diode | | | | | | |
| 2 | - Essential part number | | | | | | |
| 3 | - 0 = Standard recovery | | | | | | |
| 4 | - C = Ceramic Puk | | | | | | |
| 5 | - Voltage code: code x 100 = V_{RRM} (see Voltage Ratings Table) | | | | | | |
| 6 | - K = Puk Case DO-200AC (K-PUK) | | | | | | |

SD3000C..K Series

Outline Table

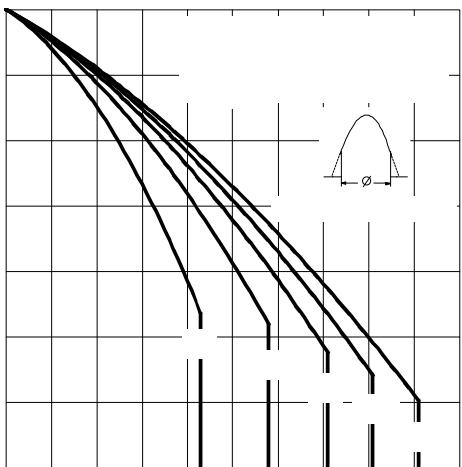
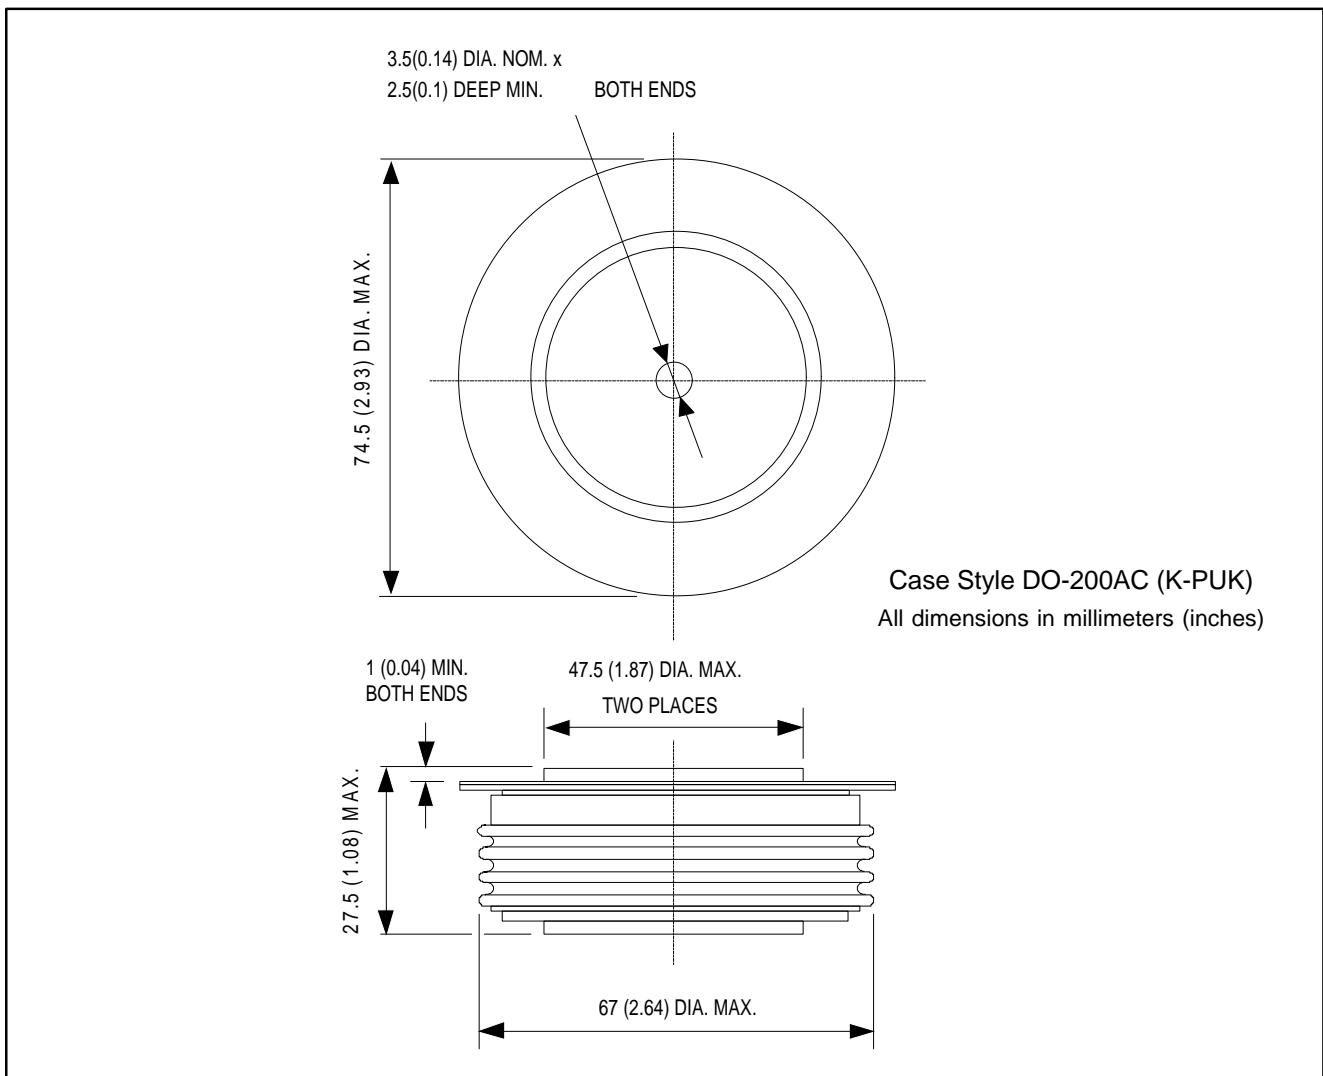


Fig. 1 - Current Ratings Characteristics

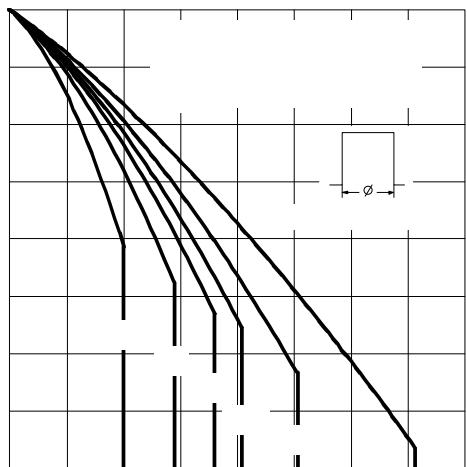


Fig. 2 - Current Ratings Characteristics