



# SD6000C..R SERIES

## STANDARD RECOVERY DIODES

## Hockey Puk Version

### Features

- Wide current range
- High voltage ratings up to 2400V
- High surge current capabilities
- Diffused junction
- Hockey Puk version
- Case style B-44 (R-PUK)

6690A

### Typical Applications

- Converters
- Power supplies
- High power drives
- Auxiliary system supplies for traction applications



case style B-44 (R-PUK)

### Major Ratings and Characteristics

Parameters	SD6000C..R	Units
$I_{F(AV)}$	6690	A
@ $T_{hs}$	55	°C
$I_{F(RMS)}$	11150	A
@ $T_{hs}$	25	°C
$I_{FSM}$	76400	A
@ 60Hz	80000	A
$I^2t$	29200	KA <sup>2</sup> s
@ 60Hz	26650	KA <sup>2</sup> s
$V_{RRM}$ range	1200 to 2400	V
$T_J$	- 40 to 175	°C

**ELECTRICAL SPECIFICATIONS**

## Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak rev. voltage V	$I_{RRM}$ max. @ $T_J = 175^\circ C$ mA
SD6000C..R	12	1200	1300	100
	16	1600	1700	
	20	2000	2100	
	24	2400	2500	

## Forward Conduction

Parameter	SD6000C..R	Units	Conditions								
$I_{F(AV)}$ Max. average forward current @ Heatsink temperature	6690 (3520)	A	180° conduction, half sine wave	No voltage reapplied	Sinusoidal halfwave, Initial $T_J = T_J$ max.						
	55 (85)	°C	Double side (single side) cooled								
$I_{F(RMS)}$ Max. RMS forward current	11150	A	@ 25°C heatsink temperature double side cooled								
$I_{FSM}$ Max. peak, one-cycle forward, non-repetitive surge current	76400	A	$t = 10ms$	100% $V_{RRM}$ reapplied							
	80000		$t = 8.3ms$								
	64250		$t = 10ms$	No voltage reapplied							
	67280		$t = 8.3ms$								
$I^2t$ Maximum $I^2t$ for fusing	29200	KA <sup>2</sup> s	$t = 10ms$	100% $V_{RRM}$ reapplied							
	26650		$t = 8.3ms$								
	20640		$t = 10ms$	No voltage reapplied							
	18850		$t = 8.3ms$								
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	292000	KA <sup>2</sup> \sqrt{s}	$t = 0.1$ to 10ms, no voltage reapplied								
$V_{F(TO)1}$ Low level value of threshold voltage	0.727	V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ max.								
$V_{F(TO)2}$ High level value of threshold voltage	1.350		$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ max.								
$r_{f1}$ Low level value of forward slope resistance	0.055	mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$ , $T_J = T_J$ max.								
$r_{f2}$ High level value of forward slope resistance	0.027		$(I > \pi \times I_{F(AV)})$ , $T_J = T_J$ max.								
$V_{FM}$ Max. forward voltage drop	1.22	V	$I_{pk} = 9000A$ , $T_J = T_J$ max, $t_p = 10ms$ sinusoidal wave								

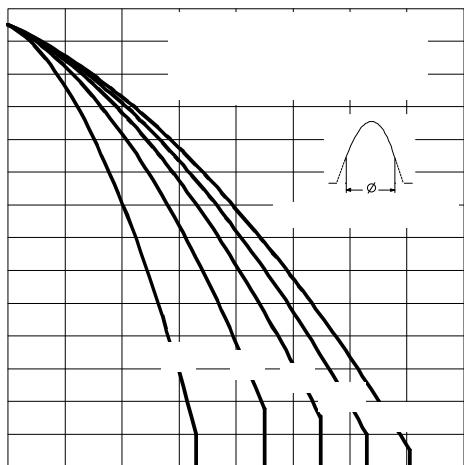


Fig. 3 - Current Ratings Characteristics

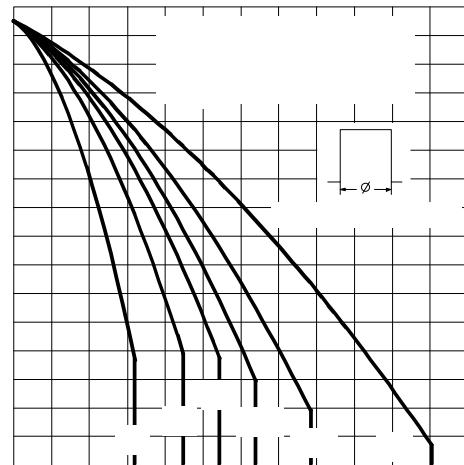


Fig. 4 - Current Ratings Characteristics

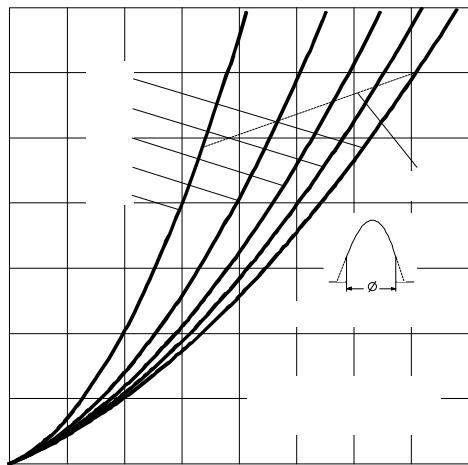


Fig. 5 - Forward Power Loss Characteristics

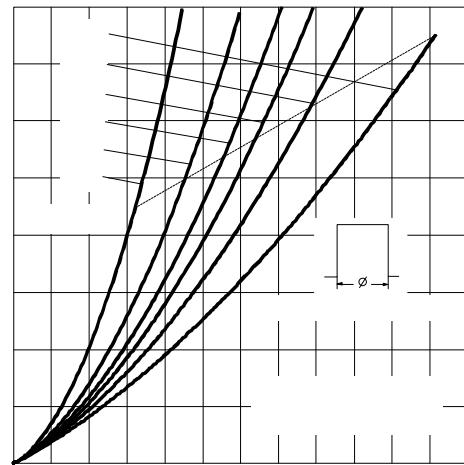


Fig. 6 - Forward Power Loss Characteristics

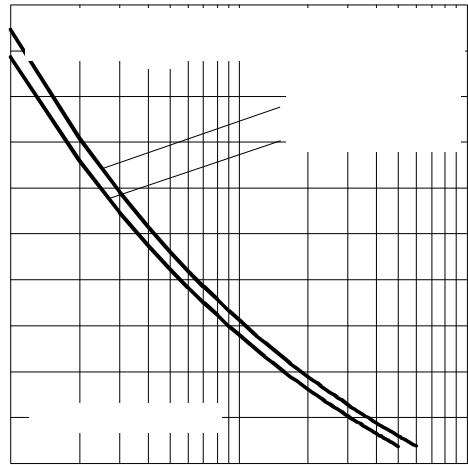


Fig. 7 - Maximum Non-Repetitive Surge Current

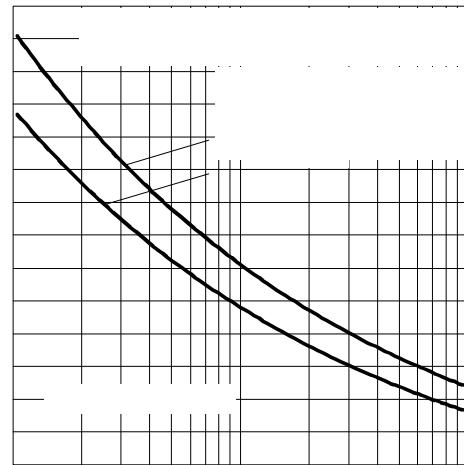


Fig. 8 - Maximum Non-Repetitive Surge Current

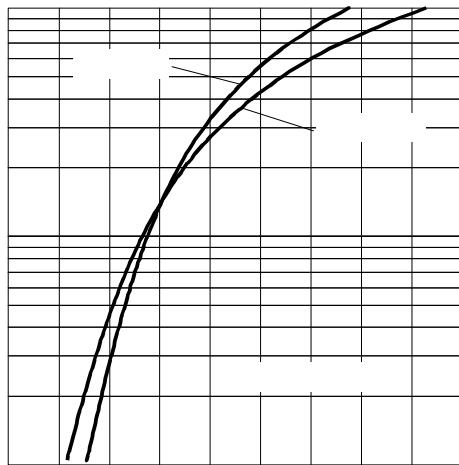


Fig. 9 - Forward Voltage Drop Characteristics

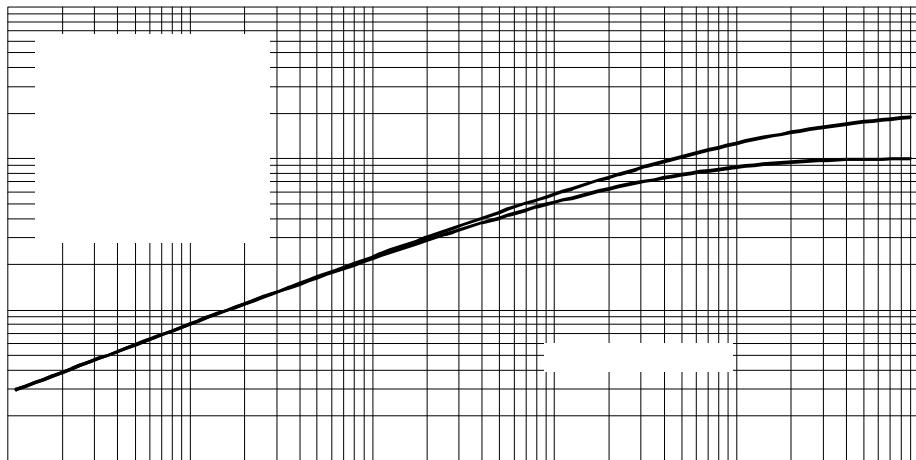


Fig. 10 - Thermal Impedance  $Z_{thJ-hs}$  Characteristics

## Thermal and Mechanical Specifications

Parameter	SD6000C..R	Units	Conditions
$T_J$	Max. junction operating temperature range	-40 to 175	$^{\circ}\text{C}$
$T_{\text{stg}}$	Max. storage temperature range	-55 to 200	
$R_{\text{thJ-hs}}$	Max. thermal resistance, junction to heatsink	0.02 0.01	K/W
F	Mounting force, $\pm 10\%$	39200 (4000)	N (Kg)
wt	Approximate weight	1590	g
Case style	B-44 (R-PUK)	See Outline Table	

 $\Delta R_{\text{thJ-hs}}$  Conduction(The following table shows the increment of thermal resistance  $R_{\text{thJ-hs}}$  when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.0009	0.0010	0.0006	0.0006	K/W	$T_J = T_{\text{J max.}}$
120°	0.0010	0.0011	0.0010	0.0010		
90°	0.0013	0.0013	0.0014	0.0014		
60°	0.0019	0.0019	0.0020	0.0020		
30°	0.0033	0.0033	0.0034	0.0034		

## Ordering Information Table

Device Code		SD	600	0	C	24	R	
1		1	2	3	4	5	6	
<b>1</b>	- Diode							
<b>2</b>	- Essential part number							
<b>3</b>	- 0 = Standard recovery							
<b>4</b>	- C = Ceramic Puk							
<b>5</b>	- Voltage code: code x 100 = $V_{\text{RRM}}$ (see Voltage Ratings Table)							
<b>6</b>	- R = Puk Case B-44 (R-PUK)							

# SD6000C..R Series

## Outline Table

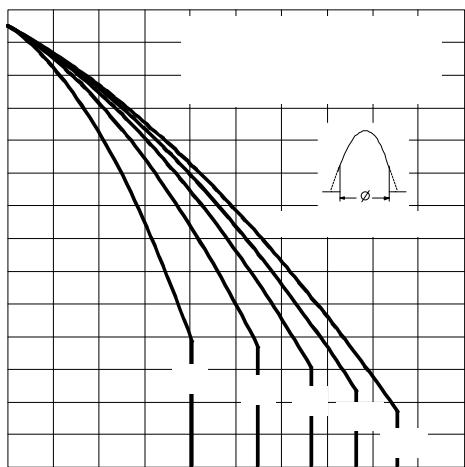
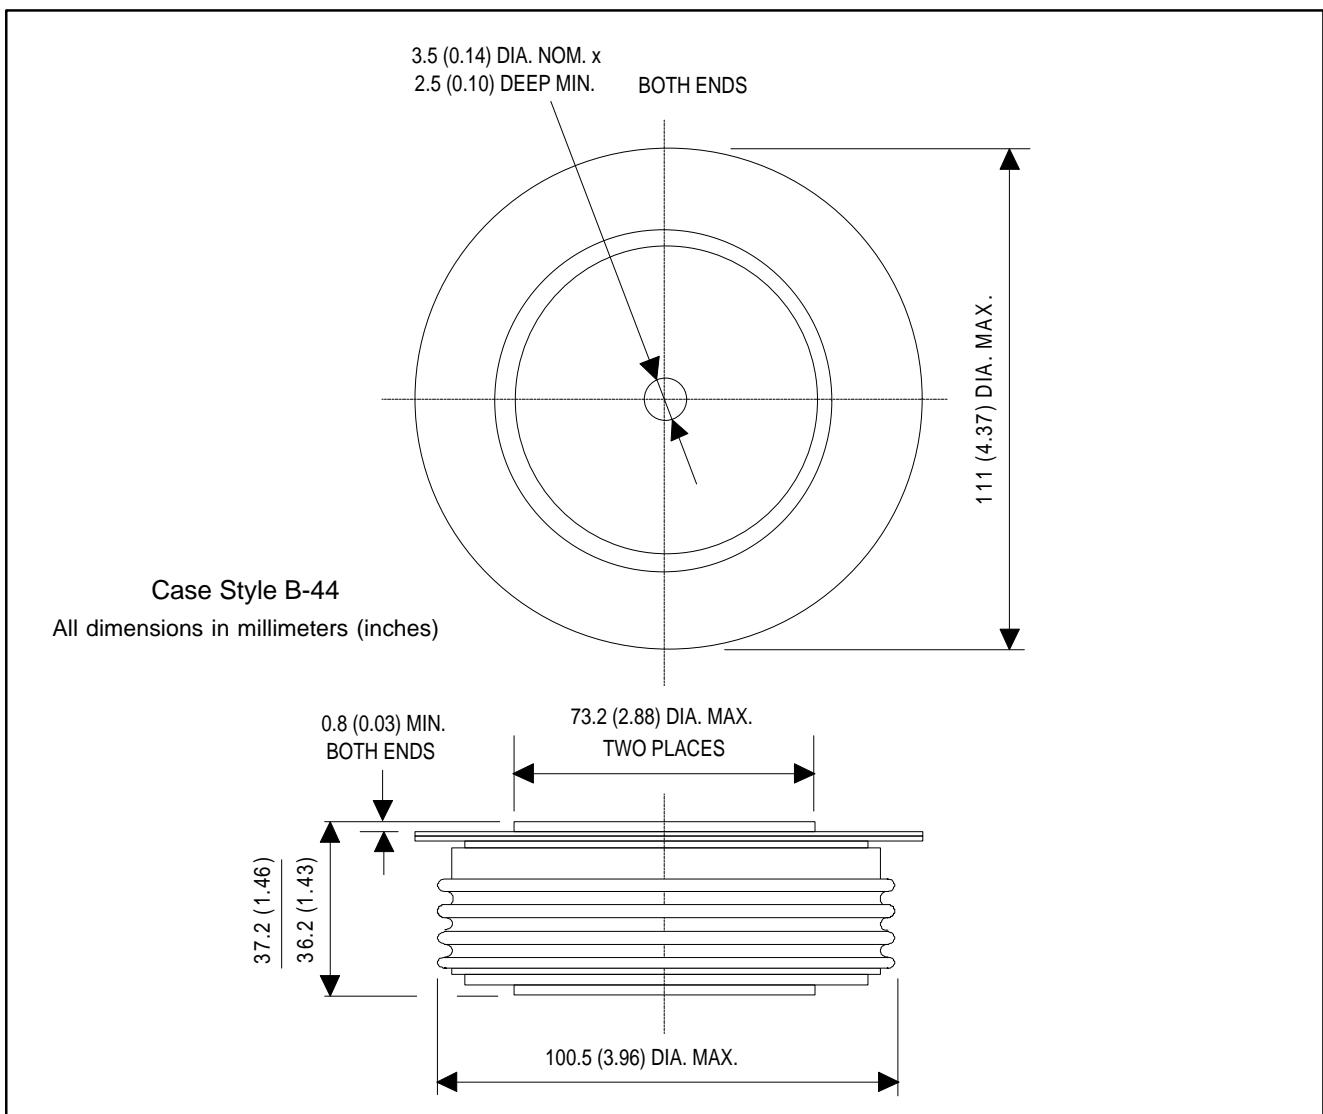


Fig. 1 - Current Ratings Characteristics

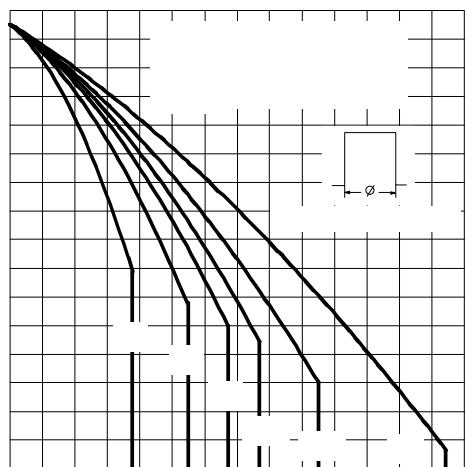


Fig. 2 - Current Ratings Characteristics