



---

---

***DISCRETE POWER DIODES and THYRISTORS***  
***DATA BOOK***

---



# ST700C..L SERIES

**PHASE CONTROL THYRISTORS**

**Hockey Puk Version**

## Features

- Center amplifying gate
- Metal case with ceramic insulator
- International standard case TO-200AC (B-PUK)


910A

## Typical Applications

- DC motor control
- Controlled DC power supplies
- AC controllers

## Major Ratings and Characteristics

Parameters	ST700C..L	Units
$I_{T(AV)}$	910	A
@ $T_{hs}$	55	°C
$I_{T(RMS)}$	1857	A
@ $T_{hs}$	25	°C
$I_{TSM}$	15700	A
@ 60Hz	16400	A
$I^2t$	1232	KA <sup>2</sup> s
@ 60Hz	1125	KA <sup>2</sup> s
$V_{DRM}/V_{RRM}$	1200 to 2200	V
$t_q$ typical	150	μs
$T_J$	- 40 to 125	°C

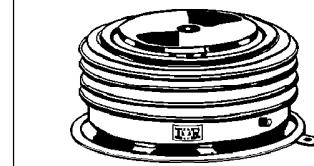

case style TO-200AC (B-PUK)

## ST700C..L Series

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{DRM}/V_{RRM}$ , max. repetitive peak and off-state voltage V	$V_{RSM}$ , maximum non-repetitive peak voltage V	$I_{DRM}/I_{RRM}$ max. @ $T_J = T_{J \text{ max}}$ mA
ST700C..L	12	1200	1300	80
	16	1600	1700	
	18	1800	1900	
	20	2000	2100	
	22	2200	2300	

#### On-state Conduction

Parameter	ST700C..L	Units	Conditions
$I_{T(AV)}$ Max. average on-state current @ Heatsink temperature	910 (355)	A	180° conduction, half sine wave double side (single side) cooled
	55 (85)	°C	
$I_{TRMS}$ Max. RMS on-state current	1857	A	DC @ 25°C heatsink temperature double side cooled
$I_{TSM}$ Max. peak, one-cycle non-repetitive surge current	15700		t = 10ms No voltage reapplied
	16400		t = 8.3ms 100% $V_{RRM}$ reapplied
	13200		t = 10ms Sinusoidal half wave, Initial $T_J = T_{J \text{ max}}$
	13800		t = 8.3ms reapplied
$I^2t$ Maximum $I^2t$ for fusing	1232	KA <sup>2</sup> s	t = 10ms No voltage reapplied
	1125		t = 8.3ms 100% $V_{RRM}$ reapplied
	871		t = 10ms
	795		t = 8.3ms
$I^2/\sqrt{t}$ Maximum $I^2/\sqrt{t}$ for fusing	12321	KA <sup>2</sup> /s	t = 0.1 to 10ms, no voltage reapplied
$V_{T(TO)1}$ Low level value of threshold voltage	1.00	V	(16.7% $\times \pi \times I_{T(AV)}$ < $I$ < $\pi \times I_{T(AV)}$ ), $T_J = T_{J \text{ max}}$ .
$V_{T(TO)2}$ High level value of threshold voltage	1.13		( $I$ > $\pi \times I_{T(AV)}$ ), $T_J = T_{J \text{ max}}$ .
$r_{t1}$ Low level value of on-state slope resistance	0.40	mΩ	(16.7% $\times \pi \times I_{T(AV)}$ < $I$ < $\pi \times I_{T(AV)}$ ), $T_J = T_{J \text{ max}}$ .
$r_{t2}$ High level value of on-state slope resistance	0.35		( $I$ > $\pi \times I_{T(AV)}$ ), $T_J = T_{J \text{ max}}$ .
$V_{TM}$ Max. on-state voltage	1.80	V	$I_{pk} = 2000A$ , $T_J = T_{J \text{ max}}$ , $t_p = 10ms$ sine pulse
$I_H$ Maximum holding current	600	mA	$T_J = 25^\circ C$ , anode supply 12V resistive load
$I_L$ Typical latching current	1000		

ST700C..L Series

**ST700C..L Series**

---

## ST700C..L Series

---

### Switching

Parameter	ST700C..L	Units	Conditions
di/dt Max. non-repetitive rate of rise of turned-on current	1000	A/μs	Gate drive 20V, 20Ω, $t_f \leq 1\mu s$ $T_J = T_{J\max}$ , anode voltage ≤ 80% $V_{DRM}$
$t_d$ Typical delay time	1.0	μs	Gate current 1A, $di_g/dt = 1A/\mu s$ $V_d = 0.67\% V_{DRM}$ , $T_J = 25^\circ C$
$t_q$ Typical turn-off time	150		$I_{TM} = 750A$ , $T_J = T_{J\max}$ , di/dt = 60A/μs, $V_R = 50V$ dv/dt = 20V/μs, Gate 0V 100Ω, $t_p = 500\mu s$

### Blocking

Parameter	ST700C..L	Units	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	500	V/μs	$T_J = T_{J\max}$ , linear to 80% rated $V_{DRM}$
$I_{RRM}$ Max. peak reverse and off-state leakage current	80	mA	$T_J = T_{J\max}$ , rated $V_{DRM}/V_{RRM}$ applied

### Triggering

Parameter	ST700C..L	Units	Conditions
$P_{GM}$ Maximum peak gate power	10.0	W	$T_J = T_{J\max}$ , $t_p \leq 5ms$
$P_{G(AV)}$ Maximum average gate power	2.0		$T_J = T_{J\max}$ , $f = 50Hz$ , $d\% = 50$
$I_{GM}$ Max. peak positive gate current	3.0	A	$T_J = T_{J\max}$ , $t_p \leq 5ms$
$+V_{GM}$ Maximum peak positive gate voltage	20	V	
$-V_{GM}$ Maximum peak negative gate voltage	5.0		$T_J = T_{J\max}$ , $t_p \leq 5ms$
$I_{GT}$ DC gate current required to trigger	TYP. 200 100 50	MAX. - 200 -	mA  $T_J = -40^\circ C$ $T_J = 25^\circ C$ $T_J = 125^\circ C$  Max. required gate trigger/ current/voltage are the lowest value which will trigger all units 12V anode-to-cathode applied
$V_{GT}$ DC gate voltage required to trigger	2.5 1.8 1.1	- 3.0 -	V  $T_J = -40^\circ C$ $T_J = 25^\circ C$ $T_J = 125^\circ C$  Max. gate current/voltage not to trigger is the max. value which will not trigger any unit with rated $V_{DRM}$ anode-to-cathode applied
$I_{GD}$ DC gate current not to trigger	10	mA	
$V_{GD}$ DC gate voltage not to trigger	0.25	V	$T_J = T_{J\max}$

## ST700C..L Series

### Thermal and Mechanical Specification

Parameter	ST700C..L	Units	Conditions
$T_J$	Max. operating temperature range	-40 to 125	°C
$T_{stg}$	Max. storage temperature range	-40 to 150	
$R_{thJ-hs}$	Max. thermal resistance, junction to heatsink	0.073 0.031	K/W
$R_{thC-hs}$	Max. thermal resistance, case to heatsink	0.011 0.006	K/W
F	Mounting force, $\pm 10\%$	14700 (1500)	N (Kg)
wt	Approximate weight	255	g
Case style	TO - 200AC (B-PUK)	See Outline Table	

### $\Delta R_{thJ-hs}$ Conduction

(The following table shows the increment of thermal resistance  $R_{thJ-hs}$  when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.009	0.009	0.006	0.006	K/W	$T_J = T_{J \text{ max.}}$
120°	0.011	0.011	0.011	0.011		
90°	0.014	0.014	0.015	0.015		
60°	0.020	0.020	0.021	0.021		
30°	0.036	0.036	0.036	0.036		

### Ordering Information Table

Device Code									
		ST	70	0	C	22	L	1	
		(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
<b>1</b>	- Thyristor								
<b>2</b>	- Essential part number								
<b>3</b>	- 0 = Converter grade								
<b>4</b>	- C = Ceramic Puk								
<b>5</b>	- Voltage code: Code $\times 100 = V_{RRM}$ (See Voltage Rating Table)								
<b>6</b>	- L = Puk Case TO-200AC (B-PUK)								
<b>7</b>	- 0 = Eyelet terminals (Gate and Auxiliary Cathode Unsoldered Leads) 1 = Fast-on terminals (Gate and Auxiliary Cathode Unsoldered Leads) 2 = Eyelet terminals (Gate and Auxiliary Cathode Soldered Leads) 3 = Fast-on terminals (Gate and Auxiliary Cathode Soldered Leads)								
<b>8</b>	- Critical dv/dt: None = 500V/ $\mu$ sec (Standard selection) L = 1000V/ $\mu$ sec (Special selection)								

## ST700C..L Series

### Outline Table

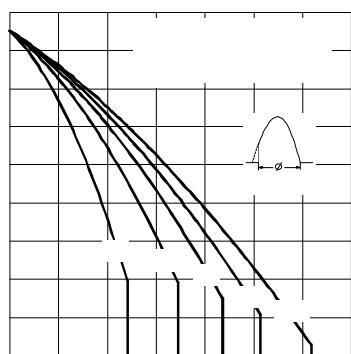
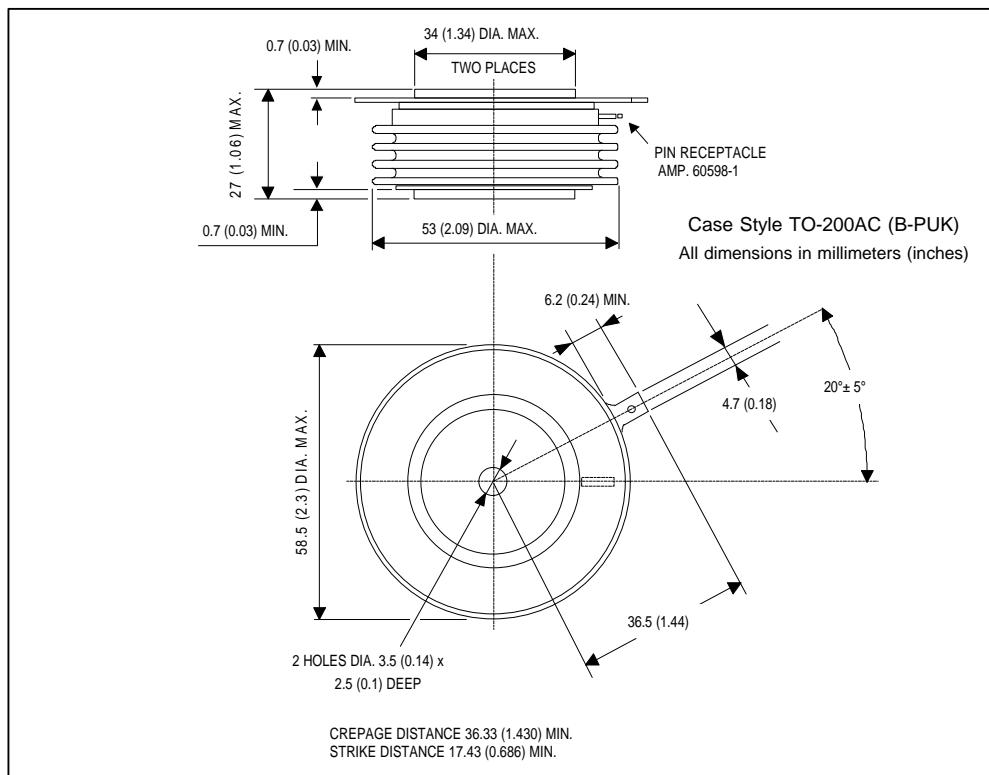


Fig. 1 - Current Ratings Characteristics

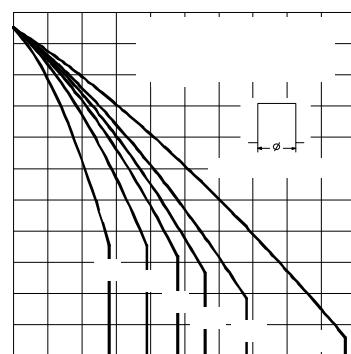


Fig. 2 - Current Ratings Characteristics