



DISCRETE POWER DIODES and THYRISTORS
DATA BOOK



ST730C..L SERIES

PHASE CONTROL THYRISTORS

Hockey Puk Version

Features

- Center amplifying gate
- Metal case with ceramic insulator
- International standard case TO-200AC (B-PUK)


990A

Typical Applications

- DC motor controls
- Controlled DC power supplies
- AC controllers

Major Ratings and Characteristics

| Parameters | ST730C..L | Units |
|-------------------|-------------|-------------------|
| $I_{T(AV)}$ | 990 | A |
| @ T_{hs} | 55 | °C |
| $I_{T(RMS)}$ | 2000 | A |
| @ T_{hs} | 25 | °C |
| I_{TSM} | 17800 | A |
| @ 50Hz | 17800 | A |
| @ 60Hz | 18700 | A |
| I^2t | 1591 | KA ² s |
| @ 50Hz | 1591 | KA ² s |
| @ 60Hz | 1452 | KA ² s |
| V_{DRM}/V_{RRM} | 800 to 1800 | V |
| t_q typical | 150 | μs |
| T_J | - 40 to 125 | °C |

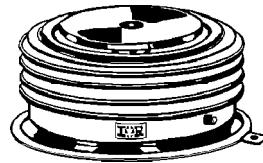

case style TO-200AC (B-PUK)

ST730C..L Series

ELECTRICAL SPECIFICATIONS

Voltage Ratings

| Type number | Voltage Code | V_{DRM}/V_{RRM} , max. repetitive peak and off-state voltage V | V_{RSM} , maximum non-repetitive peak voltage V | I_{DRM}/I_{RRM} max. @ $T_J = T_{J \max}$ mA |
|-------------|--------------|--|---|--|
| ST730C..L | 08 | 800 | 900 | 80 |
| | 12 | 1200 | 1300 | |
| | 14 | 1400 | 1500 | |
| | 16 | 1600 | 1700 | |
| | 18 | 1800 | 1900 | |

On-state Conduction

| Parameter | ST730C..L | Units | Conditions |
|--|-----------|-------------------|--|
| $I_{T(AV)}$ Max. average on-state current @ Heatsink temperature | 990 (375) | A | 180° conduction, half sine wave double side (single side) cooled |
| | 55 (85) | °C | |
| $I_{T(RMS)}$ Max. RMS on-state current | 2000 | A | DC @ 25°C heatsink temperature double side cooled |
| I_{TSM} Max. peak, one-cycle non-repetitive surge current | 17800 | | $t = 10\text{ms}$ |
| | 18700 | | $t = 8.3\text{ms}$ |
| | 15000 | | $t = 10\text{ms}$ |
| | 15700 | | $t = 8.3\text{ms}$ |
| I^2t Maximum I^2t for fusing | 1591 | KA ² s | Sinusoidal half wave, Initial $T_J = T_{J \max}$. |
| | 1452 | | $t = 10\text{ms}$ |
| | 1125 | | $t = 8.3\text{ms}$ |
| | 1027 | | $t = 10\text{ms}$ |
| $I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing | 15910 | KA ² s | $t = 0.1$ to 10ms, no voltage reapplied |
| | 0.98 | | |
| | 1.12 | | |
| | | | |
| $V_{T(TO)1}$ Low level value of threshold voltage | 0.98 | V | $(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_{J \max}$. |
| $V_{T(TO)2}$ High level value of threshold voltage | 1.12 | | $(I > \pi \times I_{T(AV)})$, $T_J = T_{J \max}$. |
| r_{t1} Low level value of on-state slope resistance | 0.32 | mΩ | $(16.7\% \times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)})$, $T_J = T_{J \max}$. |
| r_{t2} High level value of on-state slope resistance | 0.27 | | $(I > \pi \times I_{T(AV)})$, $T_J = T_{J \max}$. |
| V_{TM} Max. on-state voltage | 1.62 | V | $I_{pk} = 2000\text{A}$, $T_J = T_{J \max}$, $t_p = 10\text{ms}$ sine pulse |
| I_H Maximum holding current | 600 | mA | $T_J = 25^\circ\text{C}$, anode supply 12V resistive load |
| I_L Typical latching current | 1000 | | |

Switching

| Parameter | ST730C..L | Units | Conditions |
|---|-----------|-------|--|
| di/dt Max. non-repetitive rate of rise of turned-on current | 1000 | A/μs | Gate drive 20V, 20Ω , $t_r \leq 1\mu\text{s}$ $T_J = T_{J \max}$, anode voltage $\leq 80\%$ V_{DRM} |
| t_d Typical delay time | 1.0 | μs | Gate current 1A, $di_g/dt = 1\text{A}/\mu\text{s}$ $V_d = 0.67\% V_{DRM}$, $T_J = 25^\circ\text{C}$ |
| t_q Typical turn-off time | 150 | | $I_{TM} = 750\text{A}$, $T_J = T_{J \max}$, $di/dt = 60\text{A}/\mu\text{s}$, $V_R = 50\text{V}$ $dv/dt = 20\text{V}/\mu\text{s}$, Gate 0V 100Ω, $t_p = 500\mu\text{s}$ |

ST730C..L Series

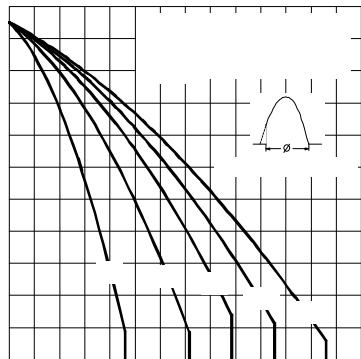


Fig. 3 - Current Ratings Characteristics

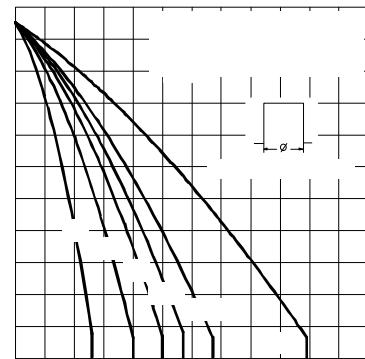


Fig. 4 - Current Ratings Characteristics

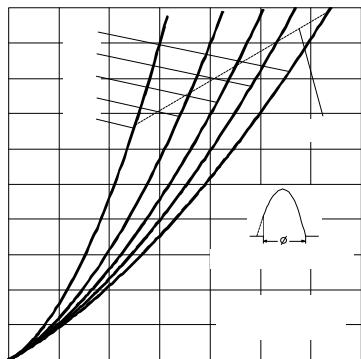


Fig. 5- On-state Power Loss Characteristics

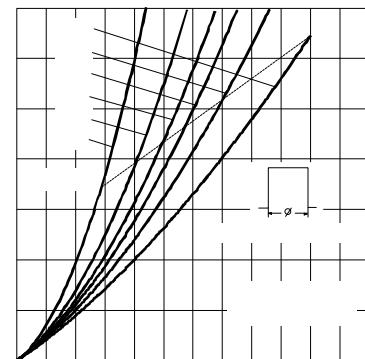


Fig. 6- On-state Power Loss Characteristics

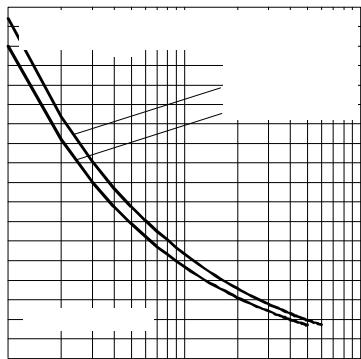


Fig. 7 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled

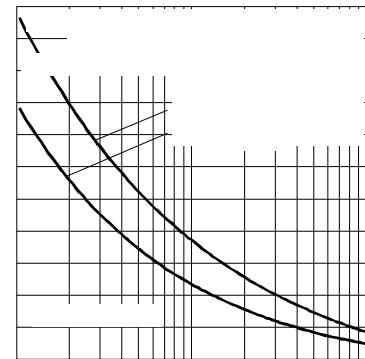


Fig. 8 - Maximum Non-Repetitive Surge Current
Single and Double Side Cooled



Fig. 9 - On-state Voltage Drop Characteristics

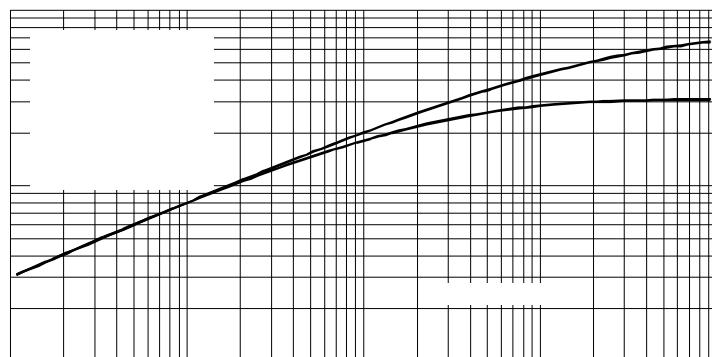


Fig. 10 - Thermal Impedance Z_{thJ-hs} Characteristics

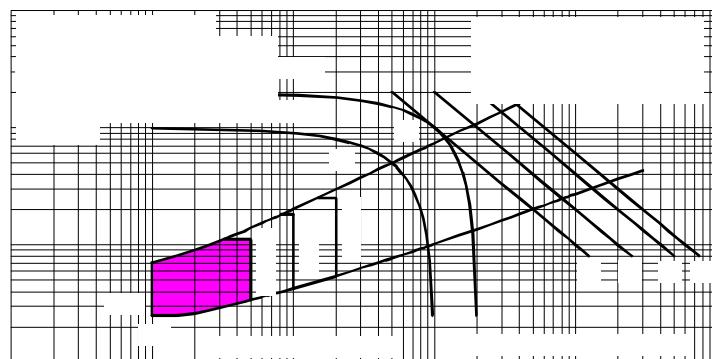


Fig. 11 - Gate Characteristics

ST730C..L Series

Blocking

| Parameter | ST730C..L | Units | Conditions |
|--|-----------|------------|--|
| dv/dt Maximum critical rate of rise of off-state voltage | 500 | V/ μ s | $T_J = T_J$ max. linear to 80% rated V_{DRM} |
| I_{DRM} I_{RRM} Max. peak reverse and off-state leakage current | 80 | mA | $T_J = T_J$ max, rated V_{DRM}/V_{RRM} applied |

Triggering

| Parameter | ST730C..L | Units | Conditions |
|--|-----------|-------|--|
| P_{GM} Maximum peak gate power | 10.0 | W | $T_J = T_J$ max, $t_p \leq 5ms$ |
| $P_{G(AV)}$ Maximum average gate power | 2.0 | | $T_J = T_J$ max, $f = 50Hz$, $d\% = 50$ |
| I_{GM} Max. peak positive gate current | 3.0 | A | $T_J = T_J$ max, $t_p \leq 5ms$ |
| $+V_{GM}$ Maximum peak positive gate voltage | 20 | V | $T_J = T_J$ max, $t_p \leq 5ms$ |
| $-V_{GM}$ Maximum peak negative gate voltage | 5.0 | | |
| I_{GT} DC gate current required to trigger | TYP. | MAX. | Max. required gate trigger/ current/voltage are the lowest value which will trigger all units 12V anode-to-cathode applied |
| | 200 | - | |
| | 100 | 200 | |
| V_{GT} DC gate voltage required to trigger | 2.5 | - | $T_J = -40^{\circ}C$ $T_J = 25^{\circ}C$ $T_J = 125^{\circ}C$ |
| | 1.8 | 3.0 | |
| | 1.1 | - | |
| I_{GD} DC gate current not to trigger | 10 | mA | Max. gate current/voltage not to trigger is the max. value which will not trigger any unit with rated V_{DRM} anode-to-cathode applied |
| V_{GD} DC gate voltage not to trigger | 0.25 | V | |

Thermal and Mechanical Specification

| Parameter | ST730C..L | Units | Conditions |
|--|--------------------|-------------------|--|
| T_J Max. operating temperature range | -40 to 125 | °C | |
| T_{stg} Max. storage temperature range | -40 to 150 | | |
| R_{thJ-hs} Max. thermal resistance, junction to heatsink | 0.073 0.031 | K/W | DC operation single side cooled DC operation double side cooled |
| R_{thC-hs} Max. thermal resistance, case to heatsink | 0.011 0.006 | | |
| F Mounting force, $\pm 10\%$ | 14700 (1500) | N (Kg) | |
| wt Approximate weight | 255 | g | |
| Case style | TO - 200AC (B-PUK) | See Outline Table | |

ST730C..L Series

ΔR_{thJ-hs} Conduction

(The following table shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC)

| Conduction angle | Sinusoidal conduction | | Rectangular conduction | | Units | Conditions |
|------------------|-----------------------|-------------|------------------------|-------------|-------|--------------------|
| | Single Side | Double Side | Single Side | Double Side | | |
| 180° | 0.009 | 0.009 | 0.006 | 0.006 | K/W | $T_J = T_{J \max}$ |
| 120° | 0.011 | 0.011 | 0.010 | 0.011 | | |
| 90° | 0.014 | 0.014 | 0.015 | 0.015 | | |
| 60° | 0.020 | 0.020 | 0.021 | 0.021 | | |
| 30° | 0.036 | 0.036 | 0.036 | 0.036 | | |

Ordering Information Table

| Device Code | |
|-------------|----|
| ST | 73 |
| 1 | 2 |
| 3 | 0 |
| 4 | C |
| 5 | 18 |
| 6 | L |
| 7 | 1 |
| 8 | |

1 - Thyristor
2 - Essential part number
3 - 0 = Converter grade
4 - C = Ceramic Puk
5 - Voltage code: Code x 100 = V_{RRM} (See Voltage Rating Table)
6 - L = Puk Case TO-200AC (B-PUK)
7 - 0 = Eyelet terminals (Gate and Auxiliary Cathode Unsoldered Leads)
 1 = Fast-on terminals (Gate and Auxiliary Cathode Unsoldered Leads)
 2 = Eyelet terminals (Gate and Auxiliary Cathode Soldered Leads)
 3 = Fast-on terminals (Gate and Auxiliary Cathode Soldered Leads)
8 - Critical dv/dt: None = 500V/ μ sec (Standard selection)
 L = 1000V/ μ sec (Special selection)

Outline Table

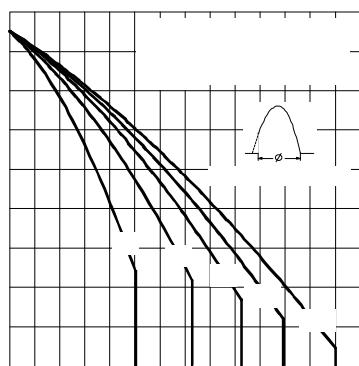
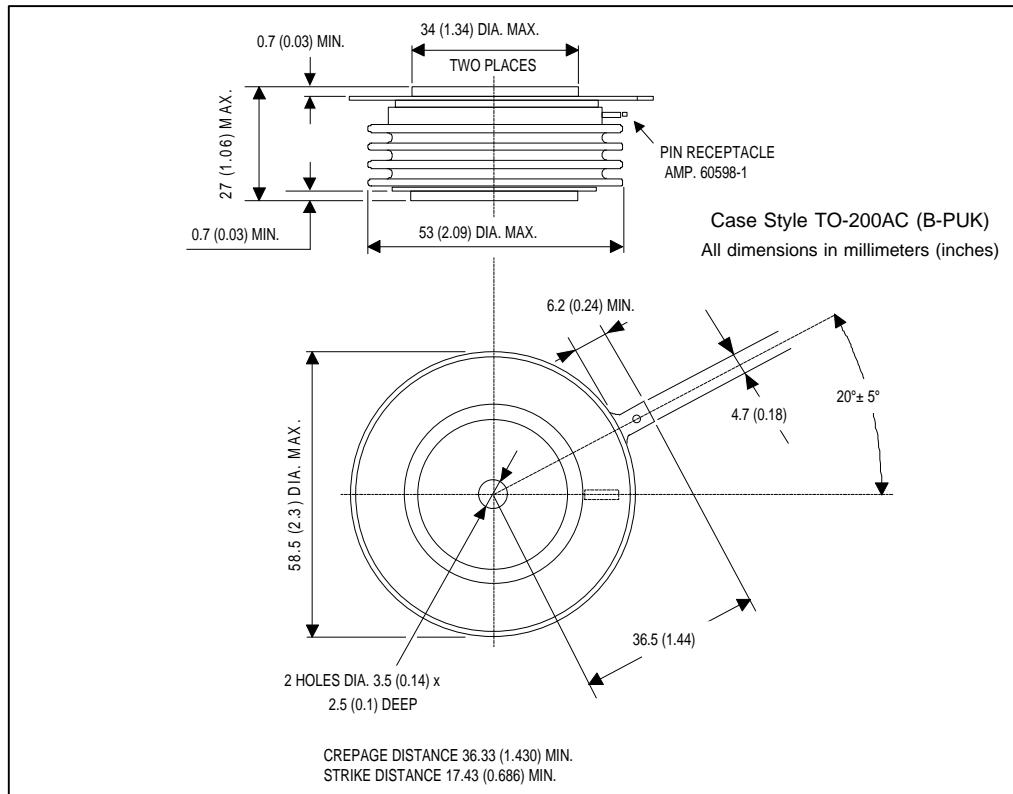


Fig. 1 - Current Ratings Characteristics

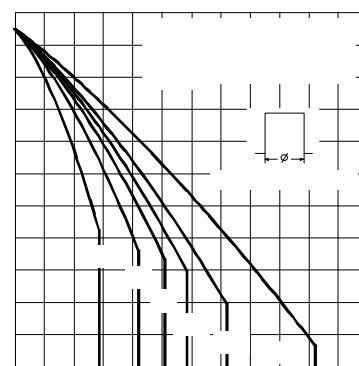


Fig. 2 - Current Ratings Characteristics