

FAST RECOVERY DIODES
Hockey Puk Version
Features

- High power FAST recovery diode series
- 1.0 to 2.0 μ s recovery time
- High voltage ratings up to 2200V
- High current capability
- Optimized turn on and turn off characteristics
- Low forward recovery
- Fast and soft reverse recovery
- Press-puk encapsulation
- Case style conform to JEDEC B-43
- Maximum junction temperature 125°C

600A


case style B-43

Typical Applications

- Snubber diode for GTO
- High voltage free-wheeling diode
- Fast recovery rectifier applications

Major Ratings and Characteristics

Parameters	SD603C..C	Units
$I_{F(AV)}$	600	A
@ T_{hs}	55	°C
$I_{F(RMS)}$	942	A
@ T_{hs}	25	°C
I_{FSM}	@ 50Hz 8320	A
	@ 60Hz 8715	A
I^2t	@ 50Hz 346	KA ² s
	@ 60Hz 316	KA ² s
V_{RRM} range	400 to 2200	V
t_{rr} range	1.0 to 2.0	μ s
@ T_J	25	°C
T_J	- 40 to 125	°C

SD603C..C Series

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} max. repetitive peak and off-state voltage V	V_{RSM} , maximum non-repetitive peak voltage V	I_{RRM} max. $T_J = 125^\circ\text{C}$ mA
SD603C..S10C	04	400	500	45
	08	800	900	
	10	1000	1100	
SD603C..S15C	12	1200	1300	
	14	1400	1500	
	16	1600	1700	
SD603C..S20C	20	2000	2100	
	22	2200	2300	

Forward Conduction

Parameter	SD603C..C	Units	Conditions
$I_{F(AV)}$ Max. average forward current @ Heatsink temperature	600(300)	A	180° conduction, half sine wave.
	55(75)	°C	Double side (single side) cooled
$I_{F(RMS)}$ Max. RMS current	942	A	@ 25°C heatsink temperature double side cooled
I_{FSM} Max. peak, one-cycle non-repetitive forward current	8320	A	t = 10ms No voltage
	8715		t = 8.3ms reapplied
	7000		t = 10ms 100% V_{RRM}
	7330		t = 8.3ms reapplied
I^2t Maximum I^2t for fusing	346	KA ² s	t = 10ms No voltage
	316		t = 8.3ms reapplied
	245		t = 10ms 100% V_{RRM}
	224		t = 8.3ms reapplied
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	3460	KA ² √s	t = 0.1 to 10ms, no voltage reapplied
$V_{F(TO)1}$ Low level of threshold voltage	1.36	V	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$), $T_J = T_J$ max.
$V_{F(TO)2}$ High level of threshold voltage	1.81		($I > \pi \times I_{F(AV)}$), $T_J = T_J$ max.
r_{f1} Low level of forward slope resistance	0.87	mΩ	(16.7% $\times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)}$), $T_J = T_J$ max.
r_{f2} High level of forward slope resistance	0.67		($I > \pi \times I_{F(AV)}$), $T_J = T_J$ max.
V_{FM} Max. forward voltage	2.97	V	$I_{pk} = 1885\text{A}$, $T_J = 25^\circ\text{C}$, $t_p = 10\text{ms}$ sinusoidal wave

Recovery Characteristics

Code	$T_J = 25^\circ\text{C}$ typical t_{rr} @ 25% I_{RRM} (μs)	Test conditions			Max. values @ $T_J = 125^\circ\text{C}$			
		I_{pk} Square Pulse (A)	di/dt (A/μs)	V_r (V)	t_{rr} @ 25% I_{RRM} (μs)	Q_{rr} (μC)	I_{rr} (A)	
S10	1.0	1000	25	-30	2.0	45	34	
S15	1.5				3.2	87	51	
S20	2.0				3.5	97	55	

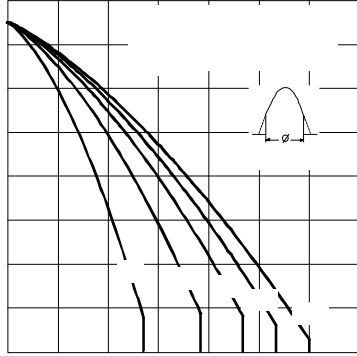


Fig. 3 - Current Ratings Characteristics

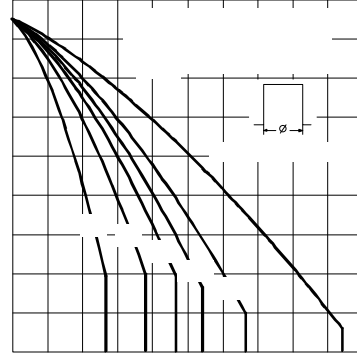


Fig. 4 - Current Ratings Characteristics

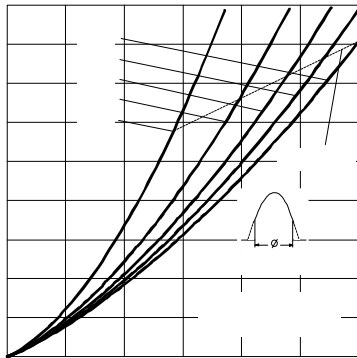


Fig. 5 - Forward Power Loss Characteristics

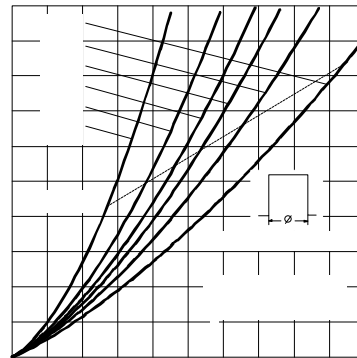


Fig. 6 - Forward Power Loss Characteristics

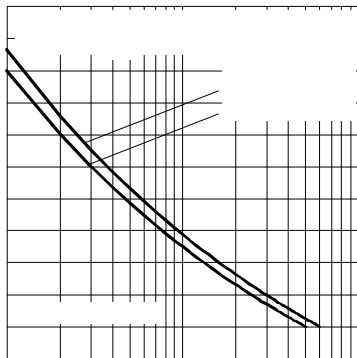


Fig. 7 - Maximum Non-repetitive Surge Current
Single and Double Side Cooled

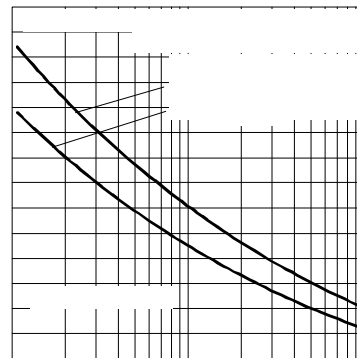


Fig. 8 - Maximum Non-repetitive Surge Current
Single and Double Side Cooled

SD603C..C Series

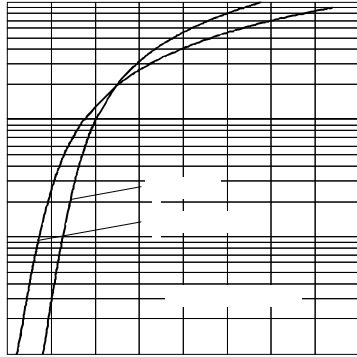


Fig. 9 - Forward Voltage Drop Characteristics

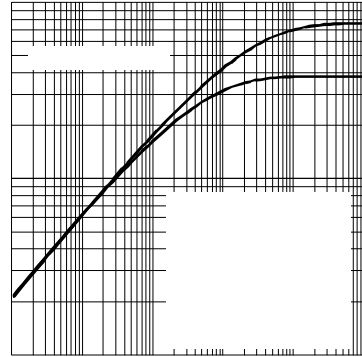


Fig. 10 - Thermal Impedance $Z_{th-J-hs}$ Characteristic

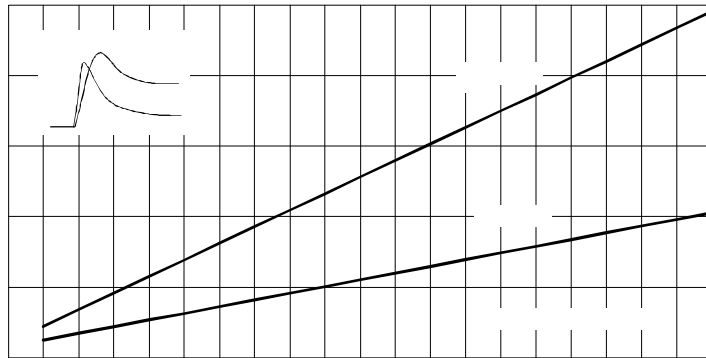


Fig. 11 - Typical Forward Recovery Characteristics

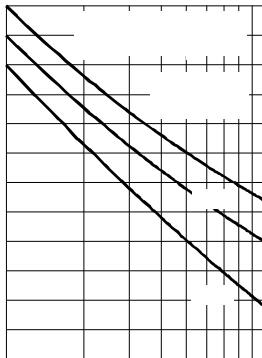


Fig. 12 - Recovery Time Characteristics

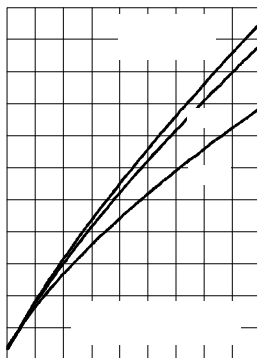


Fig. 13 - Recovery Charge Characteristics

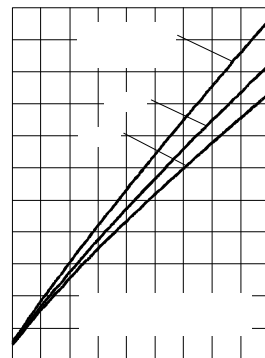


Fig. 14 - Recovery Current Characteristics

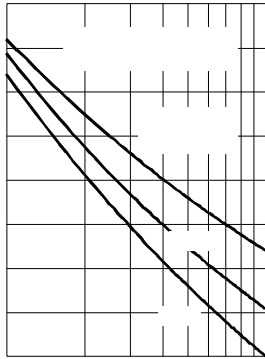


Fig. 15 - Recovery Time Characteristics

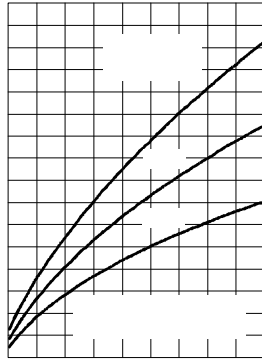


Fig. 16 - Recovery Charge Characteristics

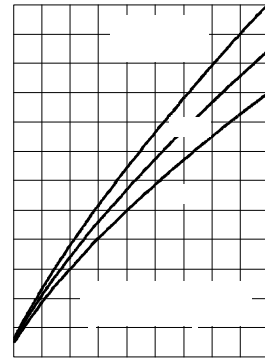


Fig. 17 - Recovery Current Characteristics

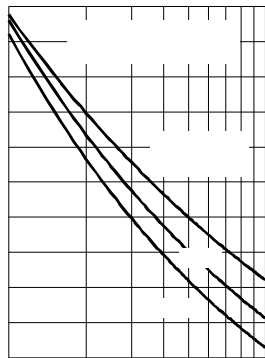


Fig. 18 - Recovery Time Characteristics

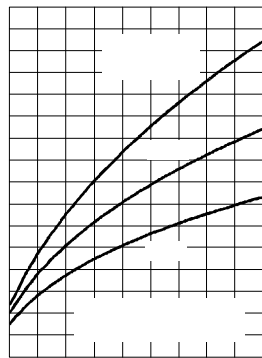


Fig. 19 - Recovery Charge Characteristics

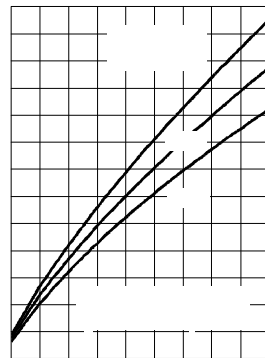


Fig. 20 - Recovery Current Characteristics

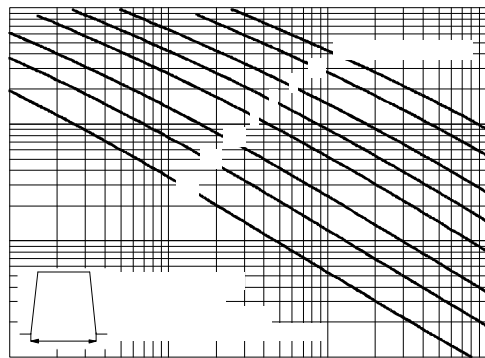
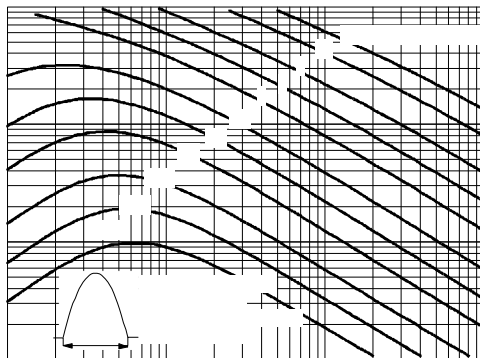


Fig. 21 - Maximum Total Energy Loss Per Pulse Characteristics

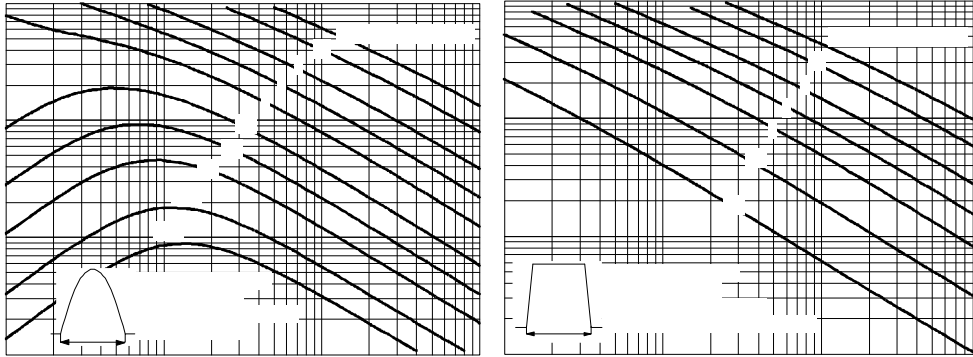


Fig. 22 - Maximum Total Energy Loss Per Pulse Characteristics

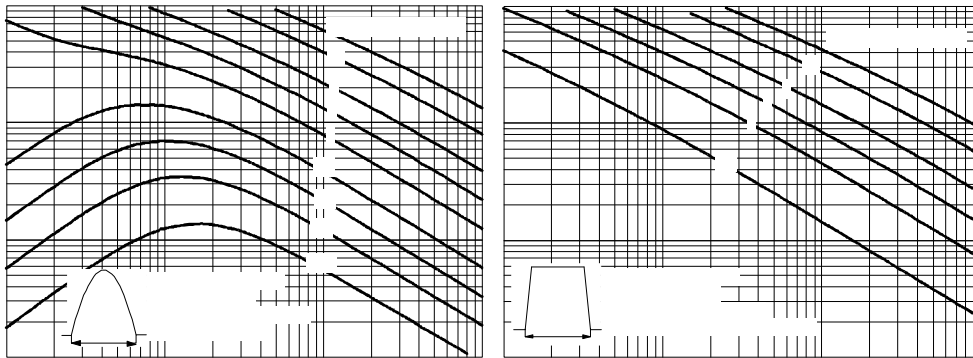


Fig. 23 - Maximum Total Energy Loss Per Pulse Characteristics

Thermal and Mechanical Specifications

Parameter	SD603C..C	Units	Conditions
T _J Max. operating temperature range	-40 to 125	°C	
T _{stg} Max. storage temperature range	-40 to 150		
R _{thJ-hs} Max. thermal resistance, junction to heatsink	0.076	K/W	DC operation single side cooled
	0.038		DC operation double side cooled
F Mounting force, ± 10%	9800 (1000)	N (Kg)	
wt Approximate weight	83	g	
Case style	B-43		See Outline Table

 ΔR_{thJ-hs} Conduction

(The following table shows the increment of thermal resistance R_{thJ-hs} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction		Rectangular conduction		Units	Conditions
	Single Side	Double Side	Single Side	Double Side		
180°	0.006	0.007	0.005	0.005	K/W	T _J = T _J max.
120°	0.008	0.008	0.008	0.008		
90°	0.010	0.010	0.011	0.011		
60°	0.015	0.015	0.016	0.015		
30°	0.026	0.025	0.026	0.025		

Ordering Information Table

Device Code															
	<table border="1" style="margin: auto;"> <tr> <td style="padding: 5px;">SD</td> <td style="padding: 5px;">60</td> <td style="padding: 5px;">3</td> <td style="padding: 5px;">C</td> <td style="padding: 5px;">22</td> <td style="padding: 5px;">S20</td> <td style="padding: 5px;">C</td> </tr> <tr> <td style="text-align: center;">①</td> <td style="text-align: center;">②</td> <td style="text-align: center;">③</td> <td style="text-align: center;">④</td> <td style="text-align: center;">⑤</td> <td style="text-align: center;">⑥</td> <td style="text-align: center;">⑦</td> </tr> </table>	SD	60	3	C	22	S20	C	①	②	③	④	⑤	⑥	⑦
SD	60	3	C	22	S20	C									
①	②	③	④	⑤	⑥	⑦									
<p>1 - Diode</p> <p>2 - Essential part number</p> <p>3 - 3 = Fast recovery</p> <p>4 - C = Ceramic Puk</p> <p>5 - Voltage code: Code x 100 = V_{RRM} (see Voltage Ratings table)</p> <p>6 - t_{rr} code (see Recovery Characteristics table)</p> <p>7 - C = Puk Case B-43</p>															

SD603C..C Series

Outline Table

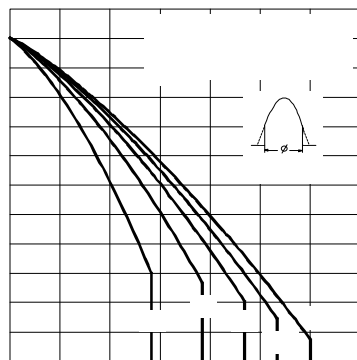
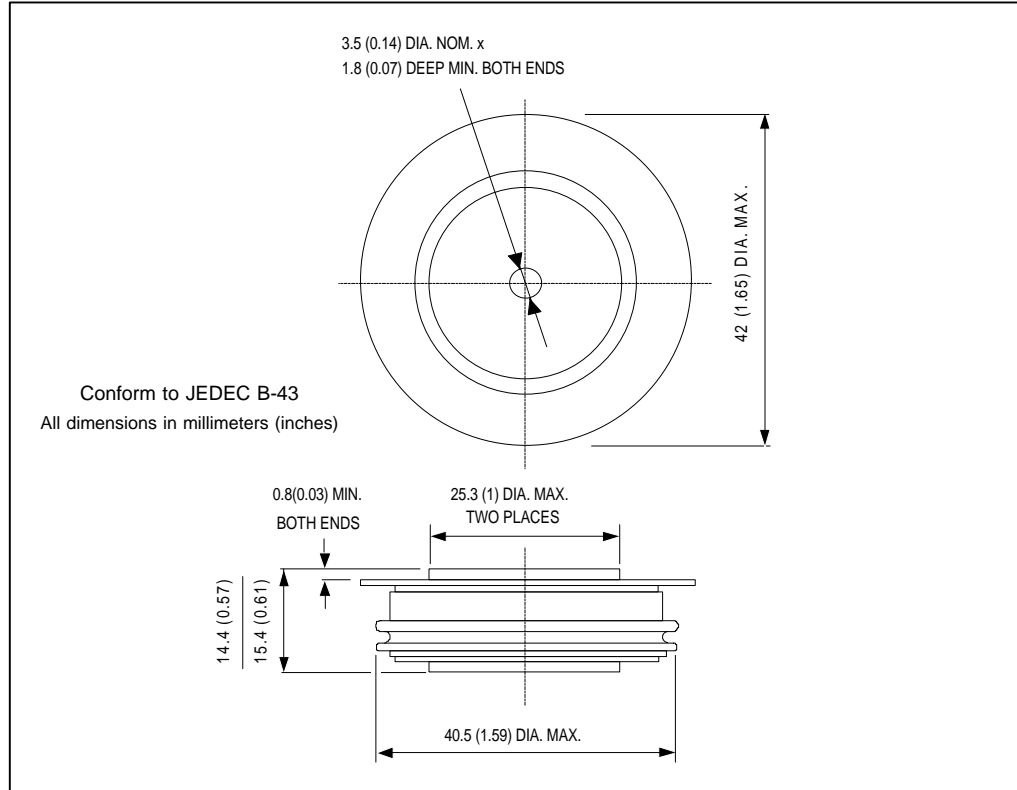


Fig. 1 - Current Ratings Characteristics

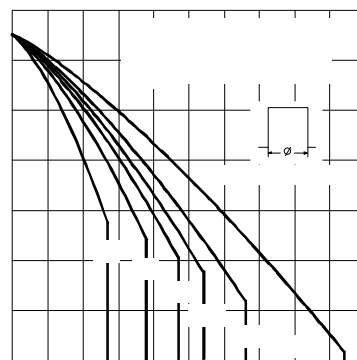


Fig. 2 - Current Ratings Characteristics