

**ISO - LOGIC BUFFER SCHMITT
TRIGGER OPEN COLLECTOR
SIDE DETECTOR**
DESCRIPTION

The IS657B is an optically integrated circuit detector with schmitt trigger open collector buffer output. It is mounted in a clear plastic lateral side looking package which enables these devices to display superior mechanical resolutions, coupled characteristics and reliability in a low cost housing.



FEATURES

- Built-in Schmitt trigger circuit
- High level output at incident light
- Open collector output
- Lateral Side Looking Plastic Package
- High Sensitivity ($E_v = 35 \text{ lx}$ at 25°C)
- LSTTL and TTL Compatible output
- Supply voltage $V_{CC} -0.5$ to $+35$ volts

APPLICATIONS

- Floppy disk drives
- Copiers, Printers, Facsimilies
- VCR's, Cassette tape recorders
- Automatic vending machines

Dimensions in mm

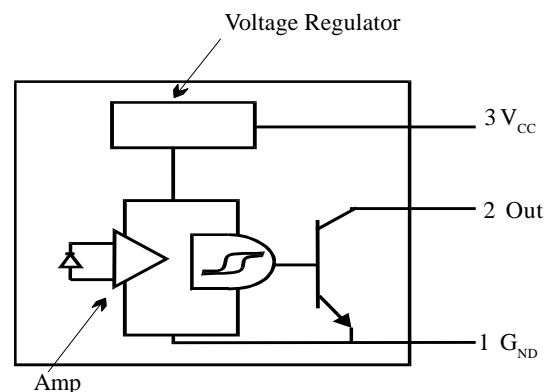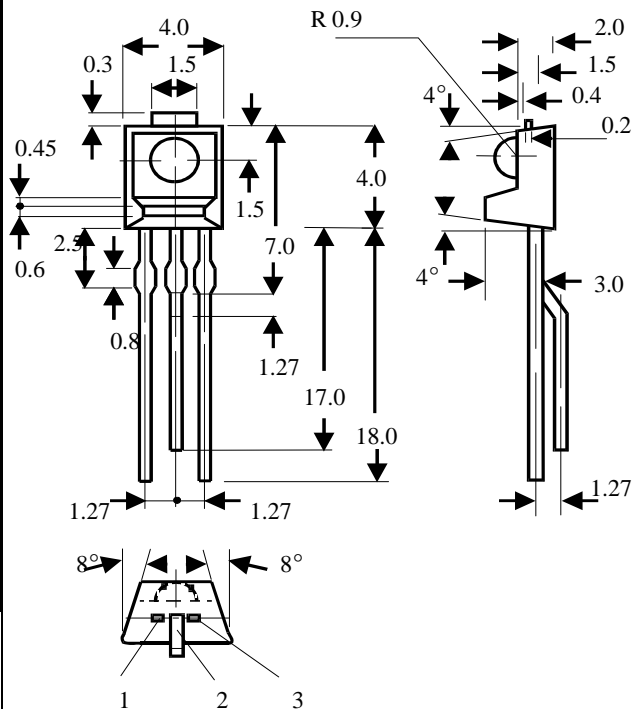

ISOCOM COMPONENTS LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax: (01429) 863581

ISOCOM INC
1024 S. Greenville Ave, Suite 240,
Allen, TX 75002 USA
Tel: (214) 495-0755 Fax: (214) 495-0901
e-mail info@isocom.com
http://www.isocom.com


ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	-40°C to +100°C
Operating Temperature	-25°C to +85°C
Lead Soldering Temperature (5 secs maximum)	260°C
Power Dissipation	250 mW
Output Current	50mA
Allowed Range V_{31}	0 to 35V
Allowed Range V_{21}	0 to 40V


ELECTRICAL CHARACTERISTICS ($T_A = 0^\circ\text{C}$ to 70°C , $V_{CC} = 5\text{V}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITIONS
High Level Output Current Low Level Output Voltage	I_{OH} V_{OL}			100 0.4	μA V	$V_{CC} = 20\text{V}$, $V_O = 30\text{V}$, $E_V = 50 \text{ lx}$ $I_{OL} = 16\text{mA}$, $E_V = 0 \text{ lx}$
Supply Current	I_{CCL} I_{CCH}			4.5 3	mA mA	$E_V = 0 \text{ lx}$ $E_V = 50 \text{ lx}$
High to Low Threshold Illumination Low to High Threshold Illumination	E_{VHL} E_{VLH}	1.5 1	10		lx lx lx lx	$T_A = 25^\circ\text{C}$, $R_L = 280\Omega$ $R_L = 280\Omega$ $T_A = 25^\circ\text{C}$, $R_L = 280\Omega$ $R_L = 280\Omega$
Hysteresis	$\frac{E_{VHL}}{E_{VLH}}$	0.50	0.65	0.90		$T_A = 25^\circ\text{C}$, $R_L = 280\Omega$
High to Low Propagation Time Low to High Propagation Time Rise Time Fall Time	t_{PHL} t_{PLH} tr tf		5 3 0.1 0.05	15 9 0.5 0.5	μs μs μs μs	$T_A = 25^\circ\text{C}$, $E_V = 50 \text{ lx}$ $R_L = 280\Omega$


Collector Power Dissipation vs. Ambient Temperature

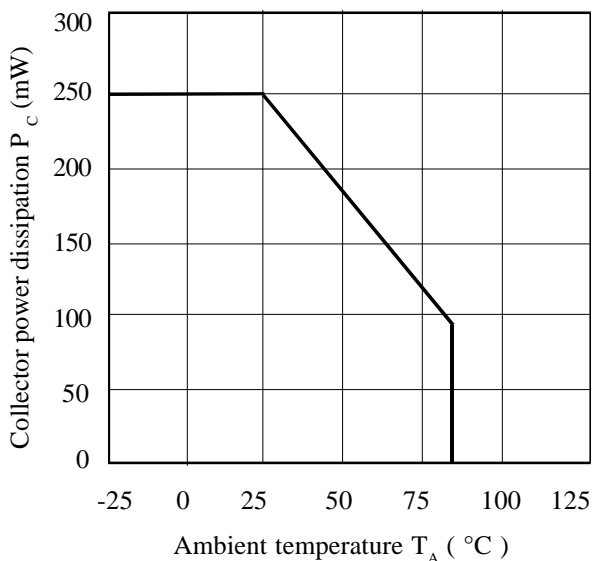


Low Level Output Voltage vs. Low Level Output Current

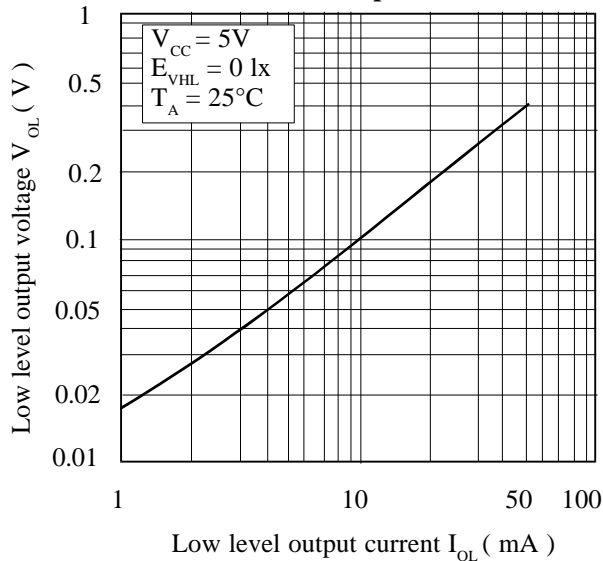


Relative Threshold Illuminance vs. Supply Voltage

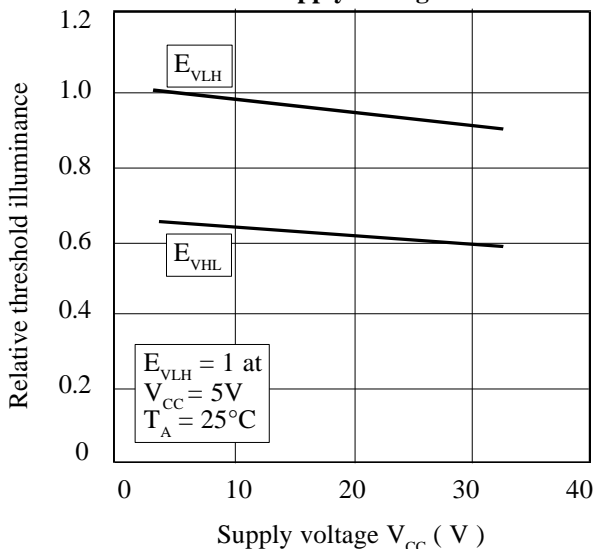

Rise Time, Fall Time vs. Load Resistance

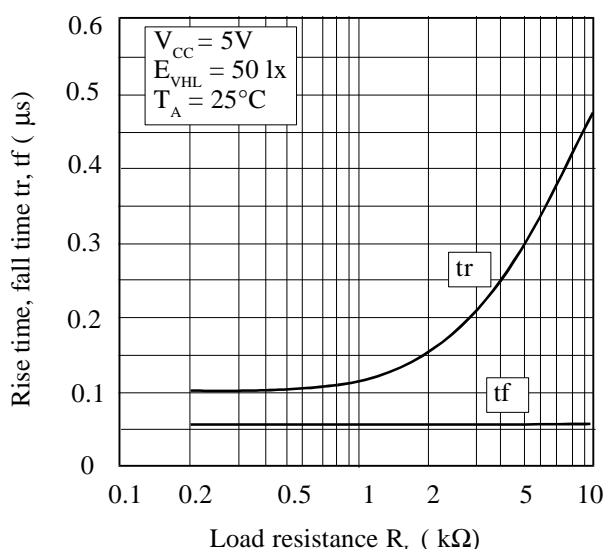

Supply Current vs. Ambient Temperature

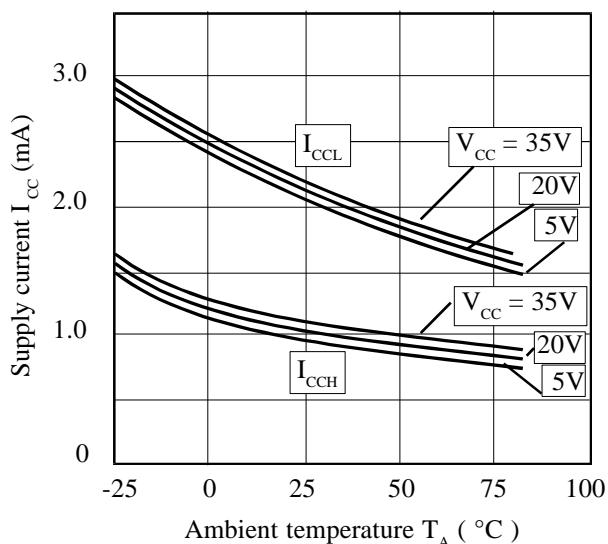

Low Level Output Voltage vs. Ambient Temperature

