

CNY17F-1X, CNY17F-2X, CNY17F-3X, CNY17F-4X
CNY17F-1, CNY17F-2, CNY17F-3, CNY17F-4



NON-BASE LEAD OPTICALLY COUPLED ISOLATOR PHOTOTRANSISTOR OUTPUT

APPROVALS

- UL recognised, File No. E91231
- 'X' SPECIFICATION APPROVALS
- VDE 0884 in 3 available lead forms : -
 - STD
 - G form
 - SMD approved to CECC 00802
- Certified to EN60950 by the following Test Bodies :-
 - Nemko - Certificate No. P96101299
 - Fimko - Registration No. 190469-01..22
 - Semko - Reference No. 9620076 01
 - Demko - Reference No. 305567

DESCRIPTION



The CNY17F-1, CNY17F-2, CNY17F-3, CNY17F-4 series of optically coupled isolators consist of infrared light emitting diode and NPN silicon photo transistor in a standard 6 pin dual in line plastic package with the base pin unconnected.

FEATURES

- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
- High BV_{CEO} (70V min)
- High Isolation Voltage (5.3kV_{RMS}, 7.5kV_{PK})
- Base pin unconnected for improved noise immunity in high EMI environment

APPLICATIONS

- DC motor controllers
- Industrial systems controllers
- Signal transmission between systems of different potentials and impedances

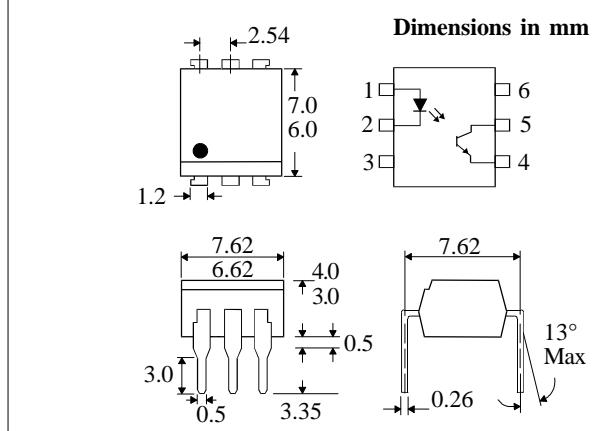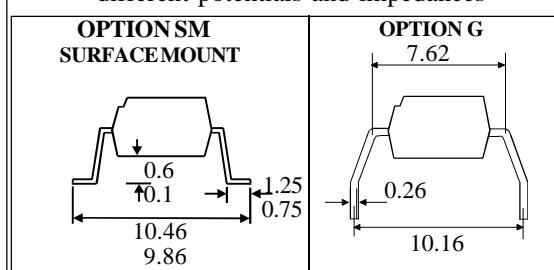

ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	-55°C to + 150°C
Operating Temperature	-55°C to + 100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

INPUT DIODE

Forward Current	60mA
Reverse Voltage	6V
Power Dissipation	105mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO}	70V
Emitter-collector Voltage BV_{ECO}	6V
Power Dissipation	160mW

POWER DISSIPATION

Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	

ISOCOM COMPONENTS LTD
Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, TS25 1YD England Tel: (01429)863609
Fax: (01429)863581 e-mail sales@isocom.co.uk
<http://www.isocom.com>

ISOCOM INC
1024 S. Greenville Ave, Suite 240,
Allen, TX 75002 USA
Tel: (214)495-0755 Fax: (214)495-0901
e-mail info@isocom.com
<http://www.isocom.com>

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F) Reverse Voltage (V_R) Reverse Current (I_R)	6	1.2	1.65	V V μA	$I_F = 60\text{mA}$ $I_R = 10\mu\text{A}$ $V_R = 6\text{V}$
Output	Collector-emitter Breakdown (BV_{CEO}) (note 2) Emitter-collector Breakdown (BV_{ECO}) Collector-emitter Dark Current (I_{CEO})	70			V	$I_C = 1\text{mA}$
		6		50	V nA	$I_E = 100\mu\text{A}$ $V_{CE} = 10\text{V}$
Coupled	Current Transfer Ratio (CTR) (Note 2) CNY17F-1 CNY17F-2 CNY17F-3 CNY17F-4 CNY17F-1 CNY17F-2 CNY17F-3 CNY17F-4 Collector-emitter Saturation Voltage $V_{CE(SAT)}$ Input to Output Isolation Voltage V_{ISO} Input-output Isolation Resistance R_{ISO}	40 63 100 160 13 22 34 56 5300 7500 5×10^{10}	80 125 200 320 % % % % 0.4 V V_{RMS} V_{PK} Ω		%	10mA I_F , 5V V_{CE} 10mA I_F , 5V V_{CE} 10mA I_F , 5V V_{CE} 10mA I_F , 5V V_{CE} 1mA I_F , 5V V_{CE} 1mA I_F , 5V V_{CE} 1mA I_F , 5V V_{CE} 1mA I_F , 5V V_{CE} 10mA I_F , 2.5mA I_C See note 1 See note 1 $V_{IO} = 500\text{V}$ (note 1)

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.

SWITCHING CHARACTERISTICS

1. Linear Operation (without saturation) Fig 1.
 $I_F = 10\text{mA}$, $V_{CC} = 5\text{V}$, $R_L = 75\Omega$

		UNITS
Turn-on Time	t_{on}	μs
Rise Time	t_r	μs
Turn-off Time	t_{off}	μs
Fall Time	t_f	μs
Cut-off Frequency F_{CO}	250	kHz

2. Switching Operation (with saturation) Fig 2
 $V_{CC} = 5\text{V}$, $R_L = 1\text{k}\Omega$

GROUP	-1 ($I_F=20\text{mA}$)	-2 and -3 ($I_F=10\text{mA}$)	-4 ($I_F=5\text{mA}$)	UNITS
Turn-on Time	t_{on}	3.0	4.2	μs
Rise Time	t_r	2.0	3.0	μs
Turn-off Time	t_{off}	18	23	μs
Fall Time	t_f	11	14	μs
V_{CESAT}		≤ 0.4		V



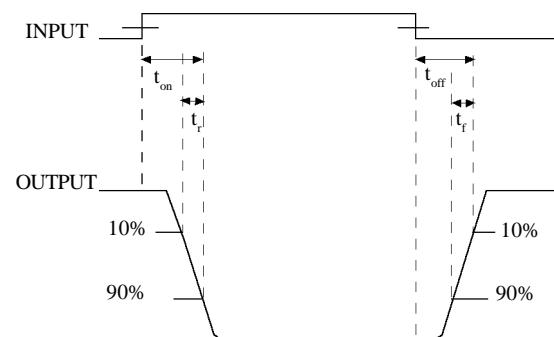



FIG 1

FIG 2


Collector Power Dissipation vs. Ambient Temperature

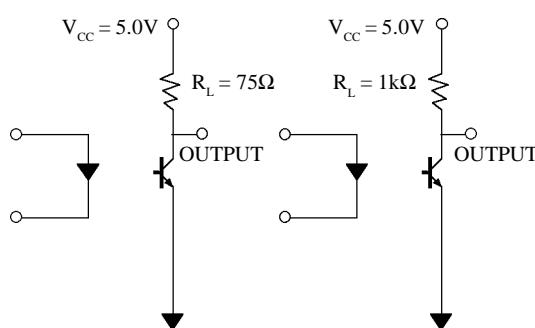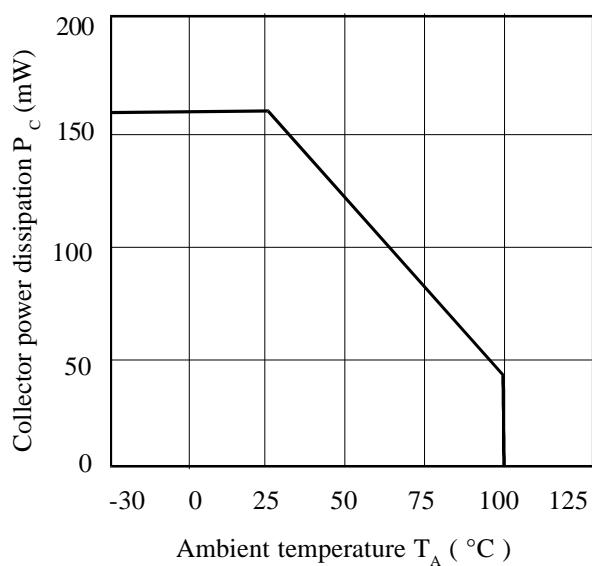


**Collector Current vs. Collector-emitter Voltage
(normalised to CNY17F-3)**

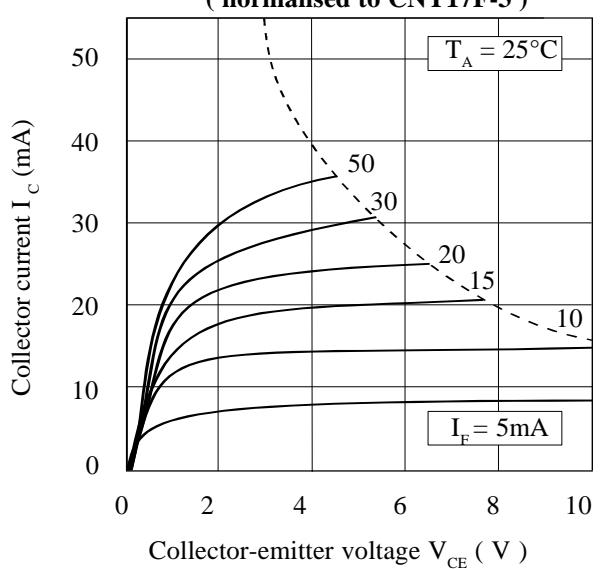


Forward Current vs. Ambient Temperature

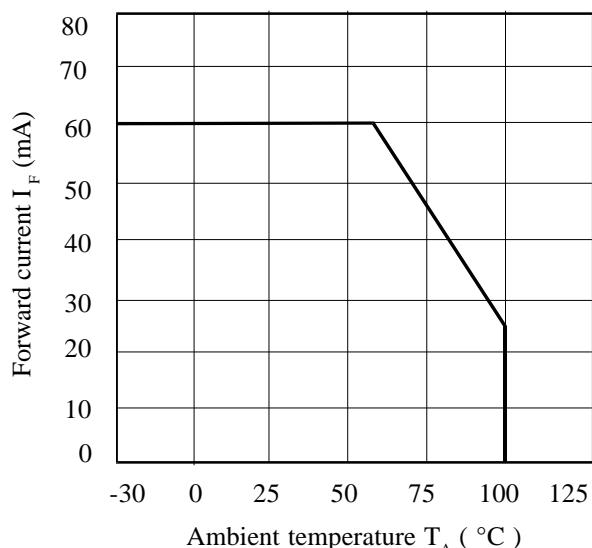

Current Transfer Ratio vs. Forward Current

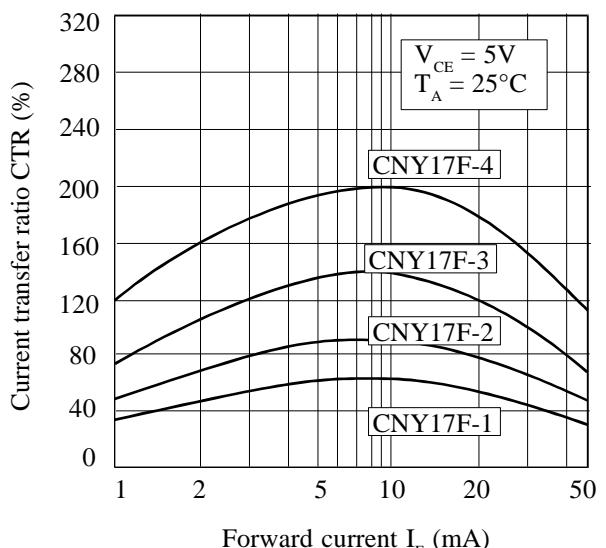

**Relative Current Transfer Ratio
vs. Ambient Temperature**

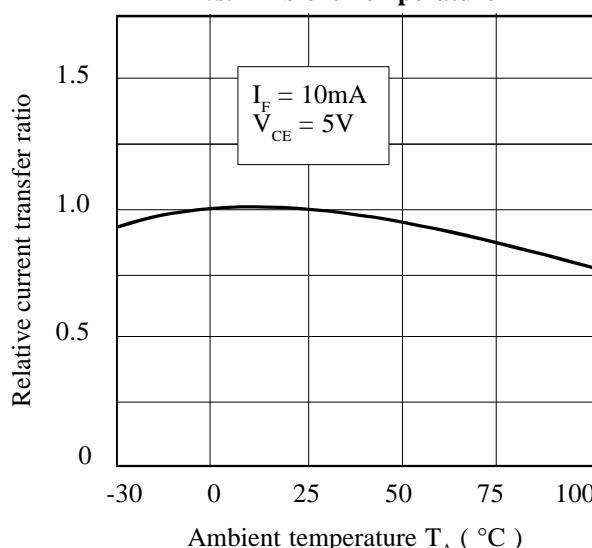

Collector-emitter Saturation Voltage vs. Ambient Temperature

