



# SF21G THRU SF26G

2.0 AMPS. GLASS PASSIVATED SUPER FAST RECTIFIERS

## FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability


## MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting Position: Any
- \* Weight: 0.40 grams

## VOLTAGE RANGE

50 to 400 Volts  
CURRENT  
2.0 Amperes

## DO-15

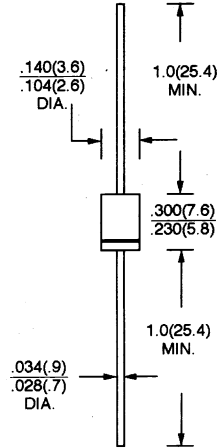

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	SF21G	SF22G	SF23G	SF24G	SF25G	SF26G	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	150	200	300	400	V
Maximum RMS Voltage	$V_{RMS}$	35	70	105	140	210	280	V
Maximum D. C Blocking Voltage	$V_{DC}$	50	100	150	200	300	400	V
Maximum Average Forward Current .375"(9.5mm) lead length @ $T_A = 55^\circ\text{C}$	$I_{F(AV)}$	2.0						A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	50						A
Maximum Instantaneous Forward Voltage at 2.0A	$V_F$	0.95				1.25		V
Maximum D. C Reverse Current @ $T_A = 25^\circ\text{C}$ at Rated D. C Blocking Voltage @ $T_A = 125^\circ\text{C}$	$I_R$	5.0 50						$\mu\text{A}$ $\mu\text{A}$
Maximum Reverse Recovery Time (Note 1)	$T_{RR}$	35						nS
Typical Junction Capacitance (Note 2)	$C_J$	60				30		pF
Operating and Storage Temperature Range	$T_J, T_{STG}$	-65 to +150						$^\circ\text{C}$

NOTES: 1. Reverse Recovery Test Conditions:  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$ .  
2. Measured at 1 MHz and applied reverse voltage of 4.0V D. C.

## RATINGS AND CHARACTERISTIC CURVES (SF21G THRU SF26G)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

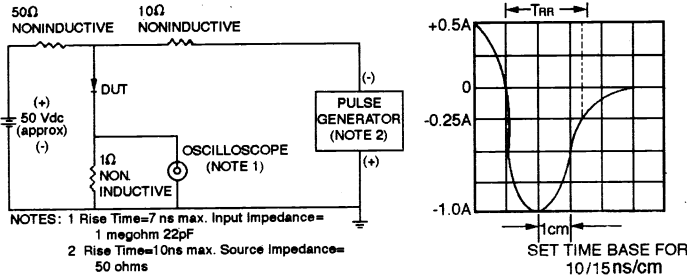


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

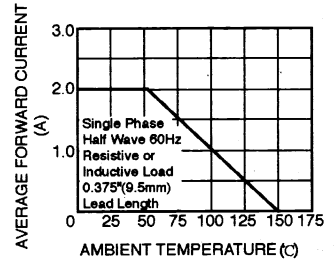


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

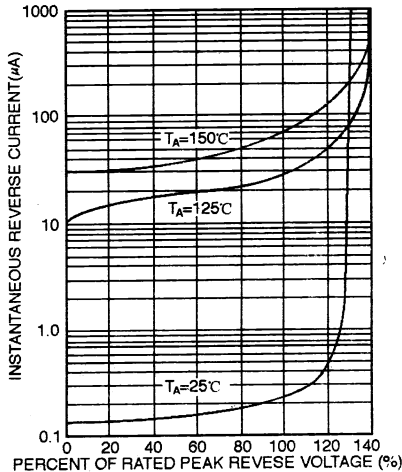


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS

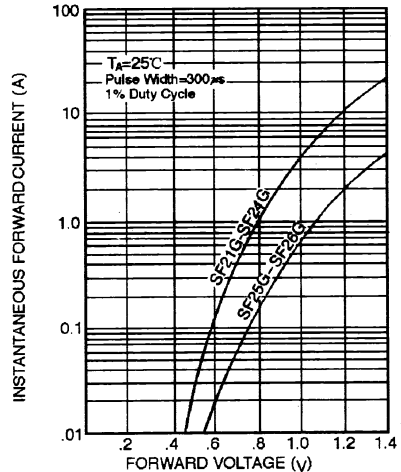


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

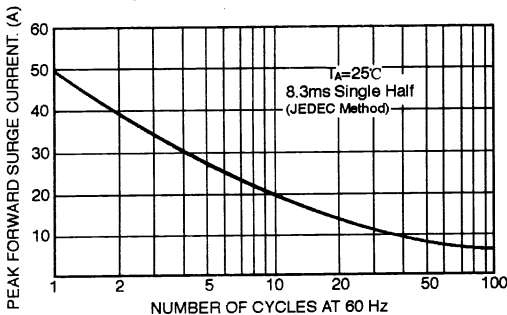


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

