




# UF4001 THRU UF4007

## 1.0 AMP. ULTRA FAST RECTIFIERS



**VOLTAGE RANGE**  
50 to 1000 Volts  
**CURRENT**  
1.0 Ampere


### FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability

### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL - STD - 202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting Position: Any
- \* Weight: 0.34 grams

### DO-41

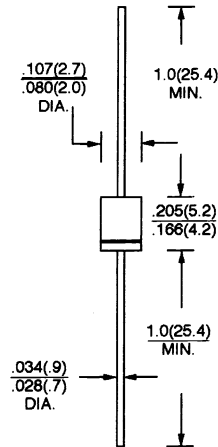

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%


TYPE NUMBER	SYMBOLS	UF 4001	UF 4002	UF 4003	UF 4004	UF 4005	UF 4006	UF 4007	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum D. C Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current (.375"9.5mm) lead length @ $T_A = 50^\circ C$	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current, 8.3 ms single half sine - wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30							A
Maximum Instantaneous Forward Voltage at 1.0A	$V_F$	1.1			1.4				V
Maximum D. C Reverse Current @ $T_A = 25^\circ C$ At Rated D. C Blocking Voltage @ $T_A = 100^\circ C$	$I_R$	5.0 100							$\mu A$
Maximum Reverse Recovery Time (Note 1)	$T_{RR}$	50			75				nS
Typical Junction Capacitance (Note 2)	$C_J$	20			15				pF
Operation Temperature Range	$T_J$	- 65 to + 125			°C				
Storage Temperature Range	$T_{STG}$	- 65 to + 150			°C				

NOTES: 1. Reverse Recovery Test Conditions:  $I_F = 0.5A$ ,  $I_R = 1.0A$ ,  $I_{RR} = 0.25A$ .  
2. Measured at 1 MHz and applied reverse voltage of 4.0V D. C.


# RATINGS AND CHARACTERISTIC CURVES

## UF4001 THRU UF4007


**FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS**

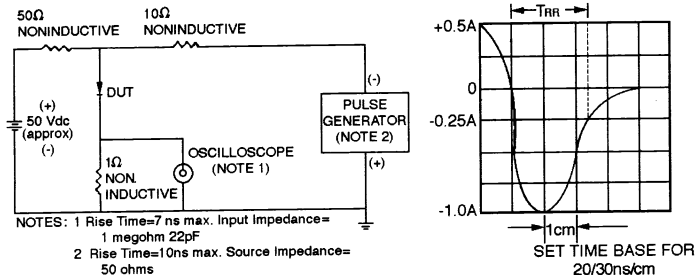


**FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE**




**FIG. 3 - TYPICAL REVERSE CHARACTERISTICS**

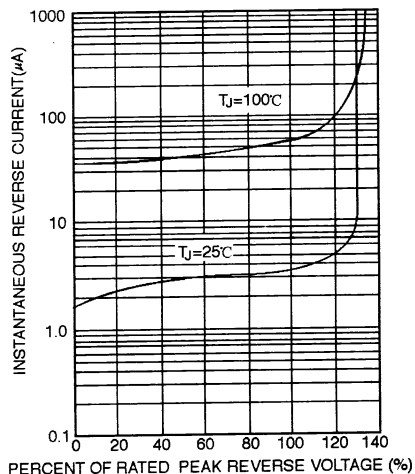

**FIG. 4 - TYPICAL FORWARD CHARACTERISTICS**

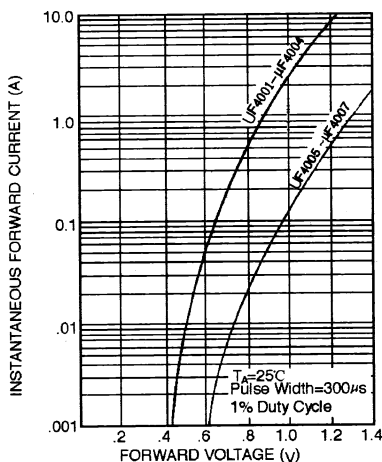

**FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

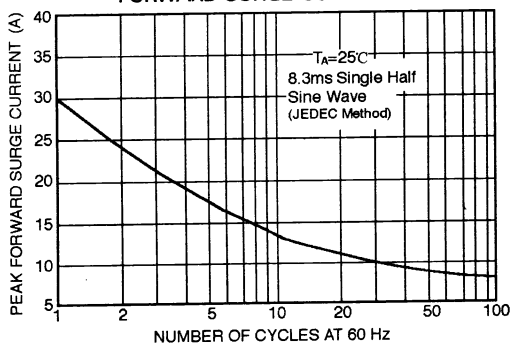

**FIG. 6 - TYPICAL JUNCTION CAPACITANCE**

