


GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION.

FEATURE

- High DC Current Gain : $h_{FE}=600\sim 3600$.
- Small Package.

MAXIMUM RATINGS (Ta=25°C)







CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	150	mA
Base Current	I_B	30	mA
Collector Power Dissipation	P_C	400	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C

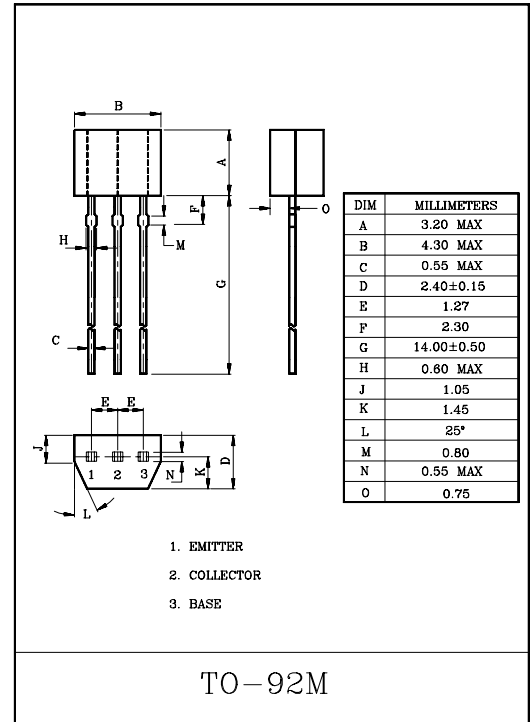

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=50V, I_E=0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V, I_C=0$	-	-	0.1	μA
DC Current Gain	h_{FE} (Note)	$V_{CE}=6V, I_C=2mA$	600	-	3600	
Collector- Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=10mA$	-	0.12	0.25	V
Transition Frequency	f_T	$V_{CE}=10V, I_C=10mA$	100	250	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	3.5	-	pF
Noise Figure	NF(1)	$V_{CE}=6V, I_C=0.1mA$ $f=100Hz, R_g=10k\Omega$	-	0.5	-	dB
	NF(2)	$V_{CE}=6V, I_C=0.1mA$ $f=1kHz, R_g=10k\Omega$	-	0.3	-	dB

Note: h_{FE} Classification A:600~1800 , B:1200~3600

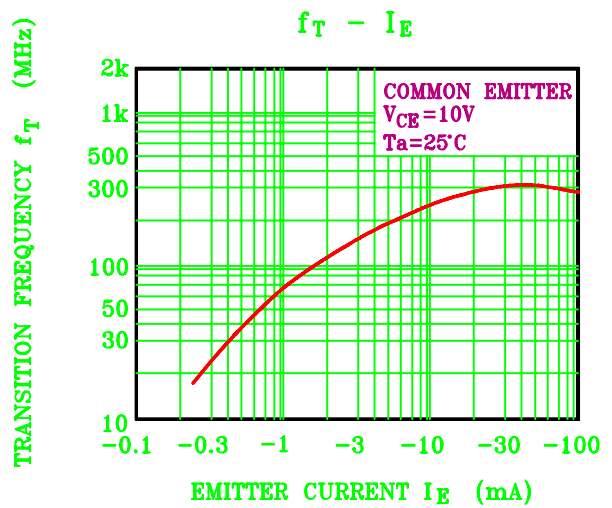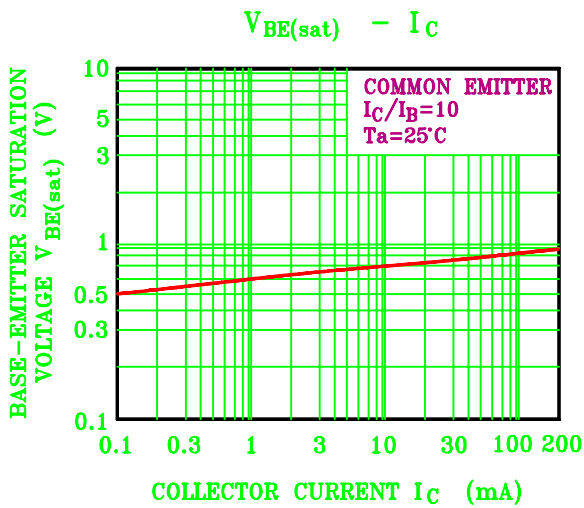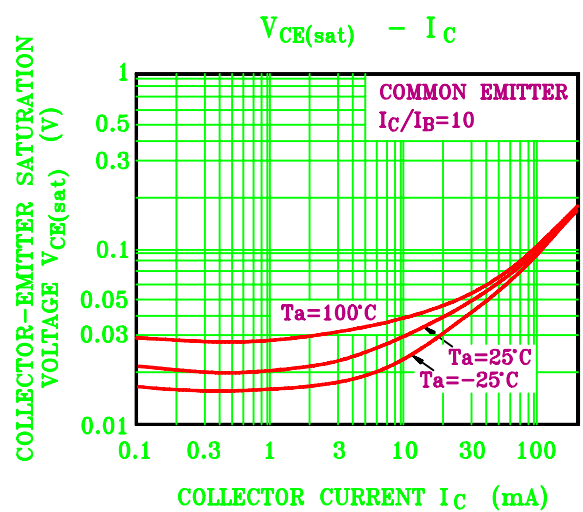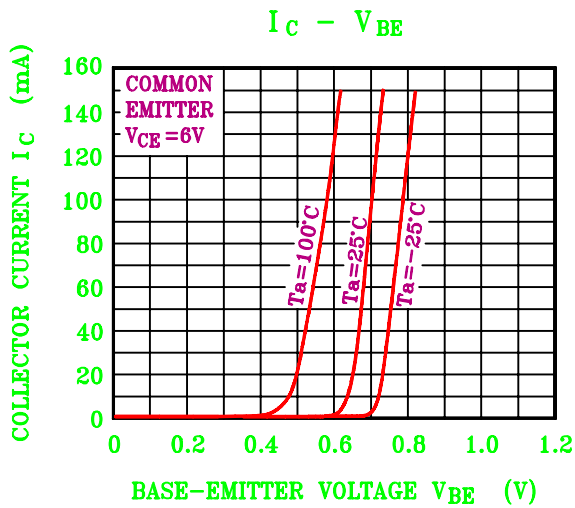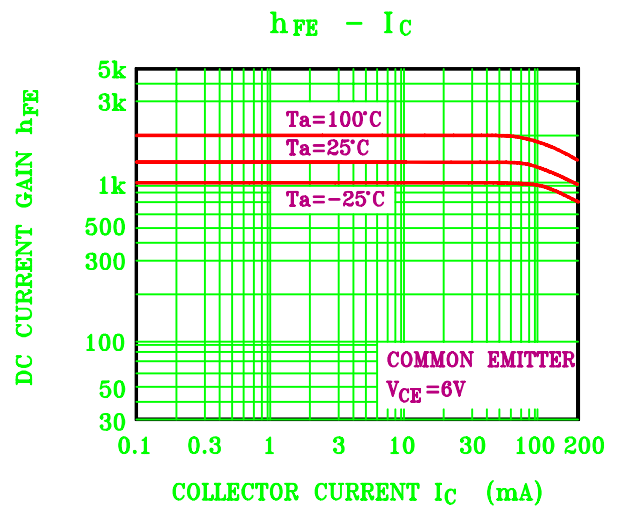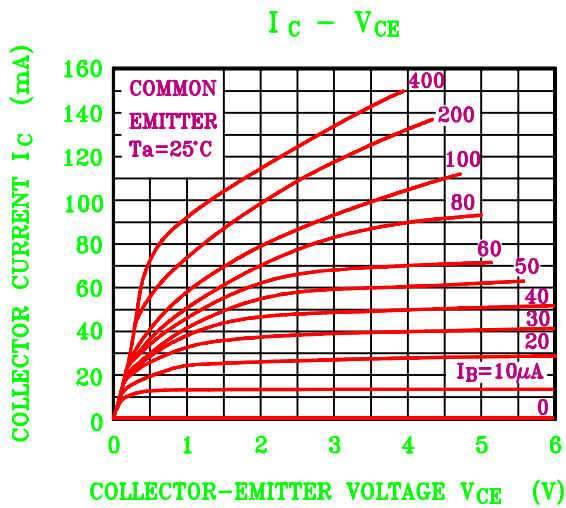

KTC3113

