

TUNING OF SEPERATE RESONANT CIRCUIT, PUSH-PULL CIRCUIT IN FM RANGE, ESPECIALLY FOR CAR AUDIO.

FEATURES




- Low Series Resistance : $r_s=0.3(\text{TYP.})$.
- Small Package : SOT-23.

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	V_R	15	V
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C

CLASSIFICATION OF CAPACITANCE GRADE

GRADE	CAPACITANCE(C_{2V})	UNIT
A	42~43.5	pF
B	43~44.5	
C	44~45.5	
D	45~46.5	
E	46~47.5	

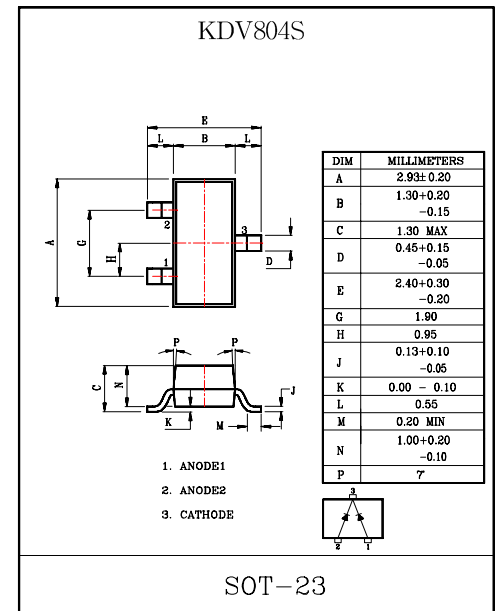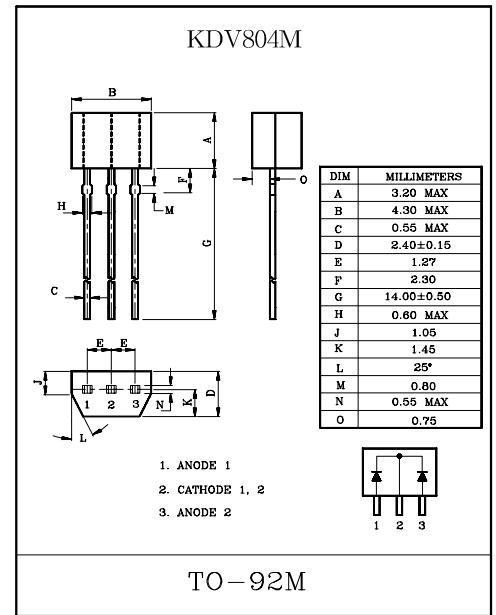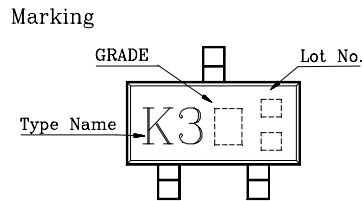

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Voltage	V_R	$I_R=10\mu A$	15	-	-	V
Reverse Current	I_R	$V_R=15V$	-	-	50	nA
Capacitance	C_{2V}	$V_R=2V, f=1\text{MHz}$	42	-	47.5	pF
	C_{8V}	$V_R=8V, f=1\text{MHz}$	24	-	28.8	
Capacitance Ratio	C_{2V}/C_{8V}		1.65	-	1.8	
Series Resistance	r_s	$C=38\text{pF}, f=100\text{MHz}$	-	0.3	0.4	Ω

KDV804M/S

