
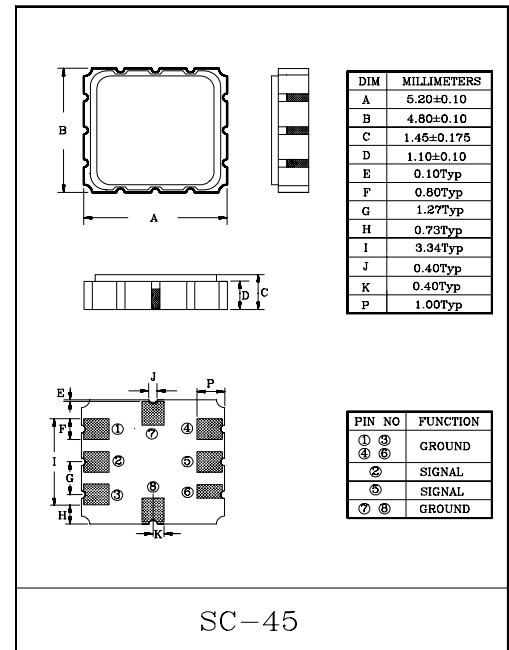


Band pass filters for the receiving RF circuits of transceiver


- High stability and reliability with good performance and no adjustment.
- Wide and sharp pass band characteristics.
- Low insertion loss and deep stop band attenuation for interference.
- KF465S : SC-45 Package, KF465V : SC-44 Package.
- F-11(DIP type package) : KF465

MAXIMUM RATINGS (T<sub>a</sub>=25°C)

ITEM	SYMBOL	RATING	UNIT
Input Signal Level	IS <sub>max</sub>	0	dBm
DC Permissive Voltage	V <sub>DC</sub>	+10	V
Operating Temperature Range	T <sub>opr</sub>	-20~+60	°C
Storage Temperature Range	T <sub>stg</sub>	-30~+85	°C

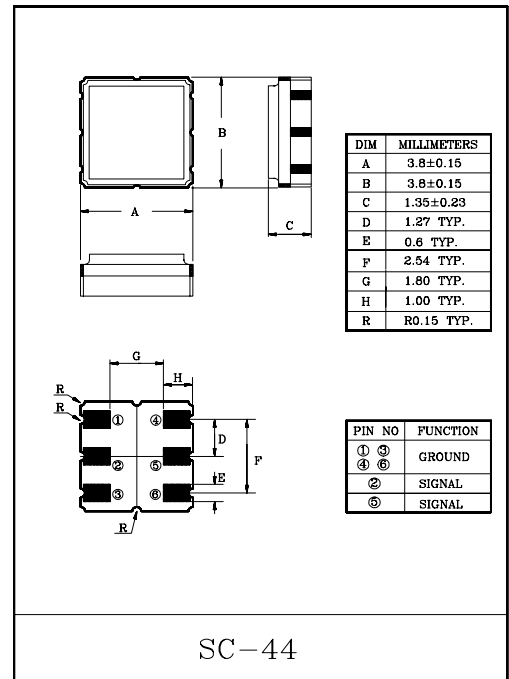

Marking

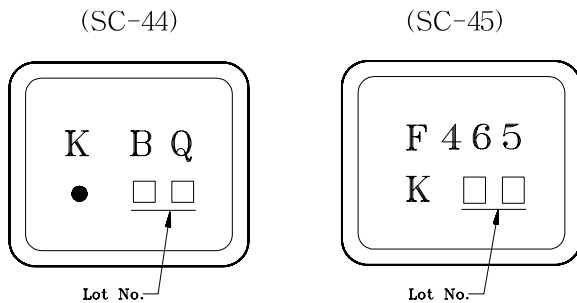


ELECTRICAL CHARACTERISTICS (Temperature 20±2°C, Humidity 65±5%)

ITEMS	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Nominal Center Frequency	f <sub>0</sub>	-	-	465	-	MHz
Bandwidth	BW <sub>3dB</sub>	-	f <sub>0</sub> ±3.0	-	-	MHz
Insertion Loss	IL <sub>PASS</sub>	f <sub>0</sub> ±3.0MHz	-	-	4.0	dB
Ripple Level	A <sub>RIP</sub>	f <sub>0</sub> ±3.0MHz	-	-	2.0	dB
Rejection Level	IL <sub>STOP</sub>	f <sub>0</sub> -13.7~f <sub>0</sub> -7.7MHz	8	-	-	dB
		f <sub>0</sub> -45.8~f <sub>0</sub> -39.8MHz	50	-	-	dB
		f <sub>0</sub> +39.8~f <sub>0</sub> +45.8MHz	45	-	-	dB
Input/Output Impedance	Z <sub>I</sub> (Z <sub>O</sub> )	-	-	50Ω//0pF	-	-


# KF465S/V

## TEST CIRCUIT

### REFERENCE LEVEL TEST CIRCUIT

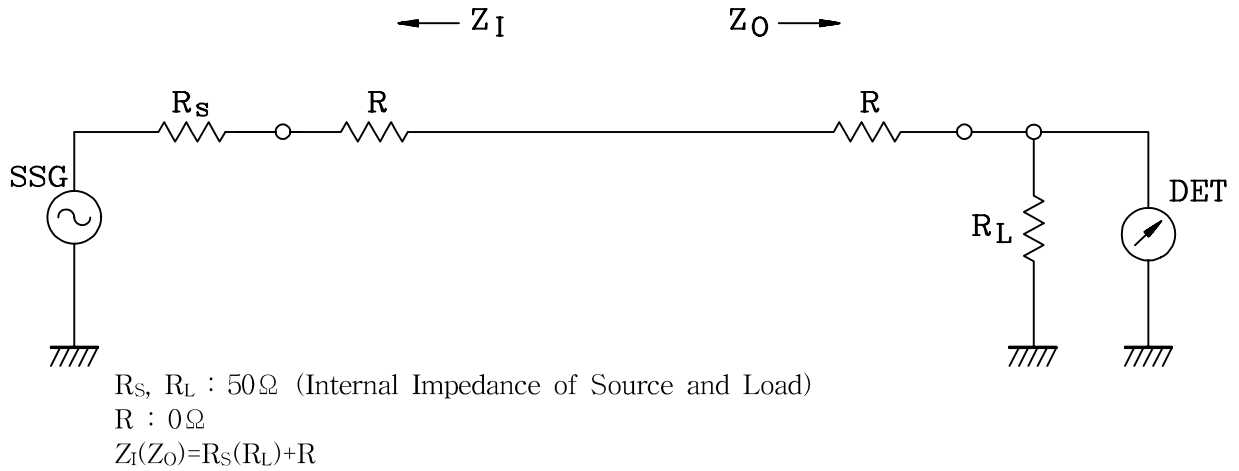

### MEASUREMENT CIRCUIT (SC-45)

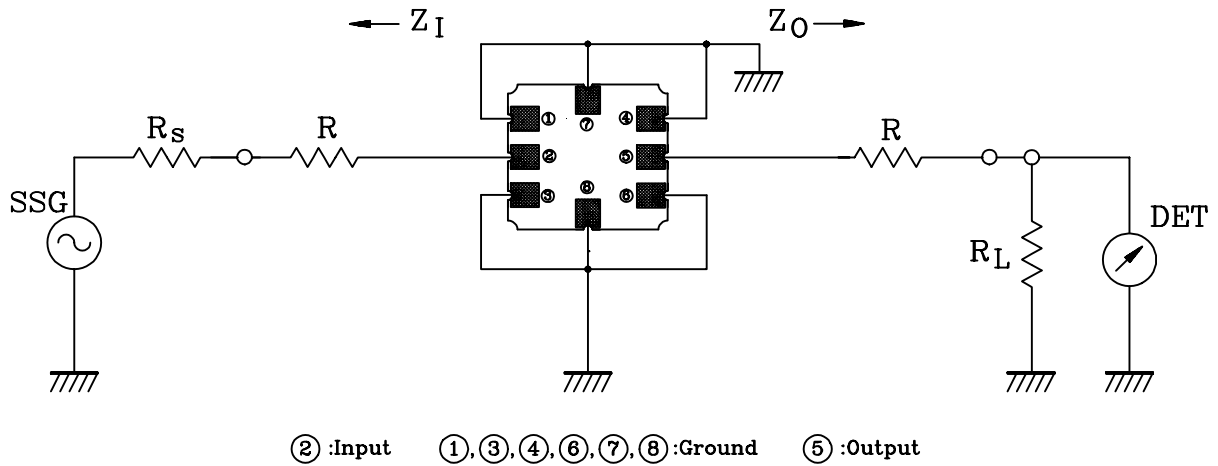

### (SC-44)

