



TYPICAL PASSBAND CHARACTERISTIC

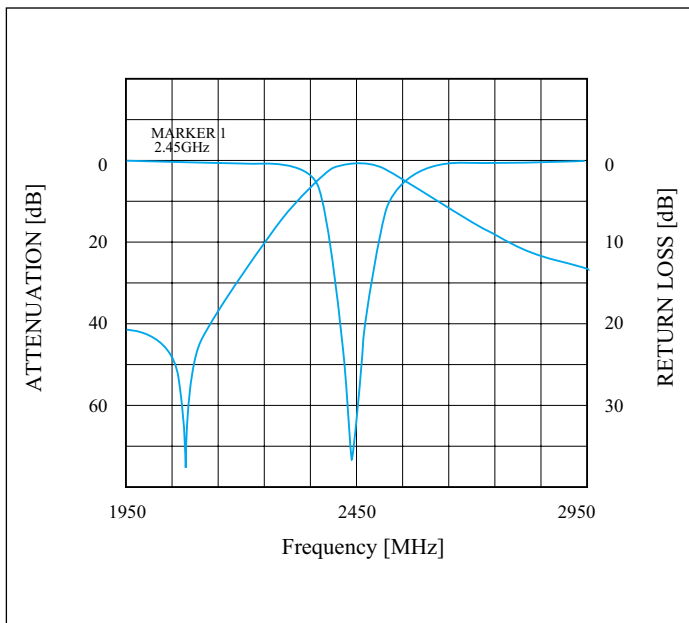

DIMENSION

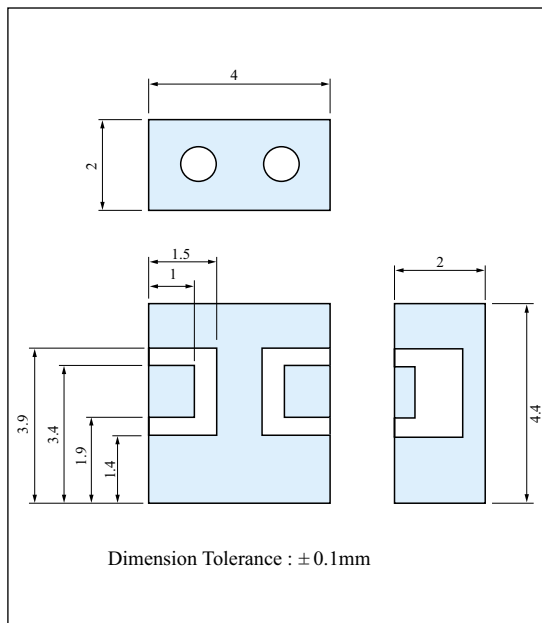

SPECIFICATION

Application	Bluetooth				
	SYMBOL	Min	Typ.	Max.	Unit
Center Frequency	f_0		2450		MHz
Bandwidth	BW	$f_0 \pm 50$			MHz
Insertion Loss	IL			2.0	dB
Ripple				1.0	dB
Standing Wave Ratio	VSWR			2.0	
Impedance	Z		50		Ω
Attenuation	1950MHz 2200MHz 2700MHz 2950MHz	40 15 12 25			dB