


AC POWER CONTROL APPLICATION.

### FEATURES

- Repetitive Peak Off-state Voltage :  $V_{DRM}=600V$ .
- R.M.S On-State Current :  $I_{T(RMS)}=6A$ .
- High Commutaing (dv/dt)
- Isolation Voltage :  $V_{ISOL}=1500V$  AC  
(UL Recognized : E166398)

### APPLICATIONS

- Switching Mode Power Supply
- Speed Control of Small Motors
- Solid State Relay
- Light Dimmer
- Washing Machine
- Temperature Control of Heater

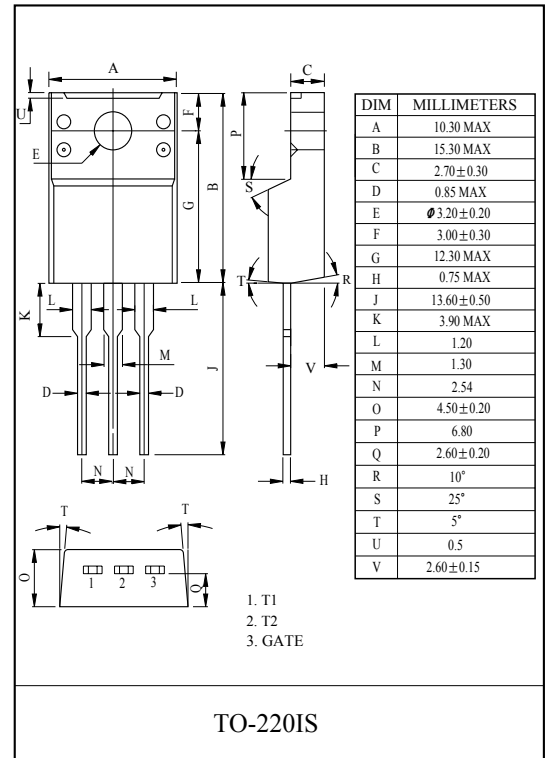

### MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Non-Repetitive Peak Off-state Voltage	$V_{DSM}$	700	V
Repetitive Peak Off-state Voltage	$V_{DRM}$	600	V
R.M.S On-state Current (Full Sine Waveform Tc=92°C)	$I_{T(RMS)}$	6	A
Peak One Cycle Surge On-state Current (Non-Repetitive)	$I_{TSM}$	54 (50Hz 1 Cycle) 60 (60Hz 1 Cycle)	A
I <sup>2</sup> t Limit Value (1mS ≤ t ≤ 10mS)	$I^2t$	15	A <sup>2</sup> S
Peak Gate Power Dissipation	$P_{GM}$	5	W
Average Gate Power Dissipation	$P_{G(AV)}$	0.5	W
Peak Gate Voltage	$V_{GM}$	10	V
Peak Gate Current	$I_{GM}$	2	A
Junction Temperature	$T_j$	-40 ~ 125	°C
Storage Temperature Range	$T_{stg}$	-40 ~ 125	°C
Isolation Voltage (Ac, t=1min.)	$V_{ISOL}$	1500	V

# T6A6CI

## ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT		
Repetitive Peak Off-state Current	$I_{DRM}$	$V_{DRM}=\text{Rated}$	-	-	20	$\mu\text{A}$		
Gate Trigger Voltage	I II III IV	$V_{GT}$	$V_D=12\text{V},$ $R_L=20\Omega$	T <sub>2</sub> (+), Gate(+)	-	-	1.5	V
				T <sub>2</sub> (+), Gate(-)	-	-	1.5	
				T <sub>2</sub> (-), Gate(-)	-	-	1.5	
				T <sub>2</sub> (-), Gate(+)	-	-	-	
Gate Trigger Current	I II III IV	$I_{GT}$	$V_D=12\text{V},$ $R_L=20\Omega$	T <sub>2</sub> (+), Gate(+)	-	-	15	mA
				T <sub>2</sub> (+), Gate(-)	-	-	15	
				T <sub>2</sub> (-), Gate(-)	-	-	15	
				T <sub>2</sub> (-), Gate(+)	-	-	-	
Peak On-State Voltage	$V_{TM}$	$I_{TM}=9\text{A}$	-	-	1.5	V		
Gate Non-Trigger Voltage	$V_{GD}$	$V_D=\text{Rated}, T_c=125^\circ\text{C}$	0.2	-	-	V		
Holding Current	$I_H$	$V_D=12\text{V}, I_{TM}=1\text{A}$	-	-	50	mA		
Critical Rate of Rise of Off-state Voltage	$d_v/d_t$	$T_j=125^\circ\text{C}, V_{DRM}=\text{Rated}$ Exponential Rise	-	300	-	V/ $\mu\text{S}$		
Critical Rate of Rise of Off-state Voltage at commutation	$(d_v/d_t)C$	$T_j=125^\circ\text{C},$ $(di/dt)C=-3.0\text{A/mS}, V_D=2/3V_{DRM}$	10	-	-	V/ $\mu\text{S}$		
Thermal Resistance	$R_{th(j-c)}$	Junction to Case, AC	-	-	3.8	$^\circ\text{C/W}$		

# T6A6CI

