


HIGH CURRENT TRANSISTORS.

FEATURES

- Complementary to BC637.

MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-60	V
Collector-Emitter Voltage	V_{CEO}	-60	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-500	mA
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 ~ 150	°C

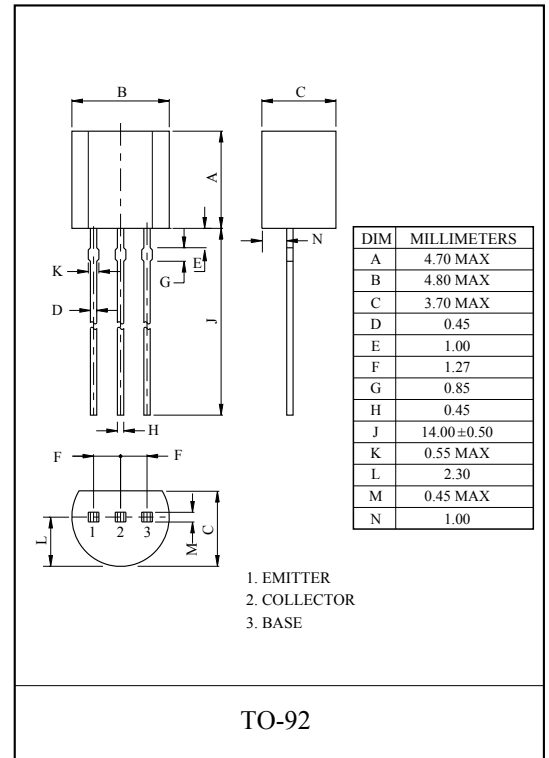

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=-30V, I_E=0$	-	-	-100	nA
Collector-Emitter Breakdown Voltage *	$V_{(BR)CEO}$	$I_C=-10mA, I_B=0$	-60	-	-	V
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=-100\mu A, I_E=0$	-60	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=-10\mu A, I_C=0$	-5.0	-	-	V
DC Current Gain	h_{FE}	$V_{CE}=-2V, I_C=-150mA$	-40	-	160	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-500mA, I_B=-50mA$	-	-	-0.5	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=-2V, I_C=-500mA$	-	-	-1.0	V
Transition Frequency	f_T	$V_{CE}=-2V, I_C=-50mA, f=100MHz$	-	150	-	MHz
Input Capacitance	C_{ib}	$V_{EB}=-0.5V, I_C=0, f=1MHz$	-	50	-	pF
Collector Output Capacitance	C_{ob}	$V_{CB}=-10V, I_E=0, f=1MHz$	-	9.0	-	pF

* Pulse Test : Pulse Width ≤ 300μS, Duty Cycle 2.0%