

3.4mm RIGHT ANGLE LED INDICATOR

L1384QMP/GD

Features


- ●PRE-TRIMMED LEADS FOR PC MOUNTING.
- ●CAN BE ASSEMBLED WITH EACH OTHER.
- •I.C. COMPATIBLE.
- •BLACK CASE ENHANCES CONTRAST RATIO.
- •WIDE VIEWING ANGLE.
- •HIGH RELIABILITY LIFE MEASURED IN YEARS.
- •HOUSING MATERIAL: PPA
- •PACKAGE: 1000PCS/REEL.

Description

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

PAGE: 1 OF 4

Package Dimensions

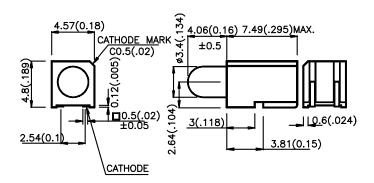

Notes

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is $\pm 0.25(0.01")$ unless otherwise noted.
- 3. Lead spacing is measured where the lead emerge package.
- 4. Specifications are subject to change without notice.

 SPEC NO: DSAA2263
 REV NO: V.2
 DATE: OCT/02/2001

 APPROVED: J. Lu
 CHECKED:
 DRAWN: S.S. Wu

Kingbright

Selection Guide

Part No.	Dice	Case-Color	lv (mcd) @ 10 mA		Viewing Angle
	5.00		Min.	Тур.	201/2
L1384QMP/GD	GREEN (GaP)	GREEN DIFFUSED	8	20	60°

Electrical / Optical Characteristics at T_A=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominate Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Halfwidth	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
V _F	Forward Voltage	Green	2.2	2.5	V	IF=20mA
I _R	Reverse Current	Green		10	uA	VR = 5V

Absolute Maximum Ratings at T_A=25°C

Parameter	Green	Units
Power dissipation	105	mW
DC Forward Current	25	mA
Peak Forward Current [1]	140	mA
Reverse Voltage	5	V
Operation/Storage Temperature	-40°C To +85°C	

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

SPEC NO: DSAA2263 APPROVED: J. Lu


REV NO: V.2 CHECKED:

DATE: OCT/02/2001 DRAWN: S.S. Wu

PAGE: 2 OF 4


Note: 1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.


Kingbright

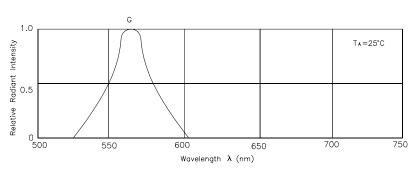



RELATIVE INTENSITY Vs. WAVELENGTH

Green L1384QMP/GD










SPEC NO: DSAA2263 APPROVED: J. Lu REV NO: V.2 CHECKED:

DATE: OCT/02/2001 DRAWN: S.S. Wu PAGE: 3 OF 4


Kingbright

L1384QMP/GD SMT Reflow Soldering Instructions


Number of reflow process shall be less than 2 times and cooling process to normal temperature is required between first and second soldering process."

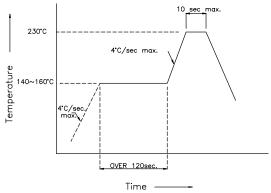

Recommended Soldering Pattern



Tape Specifications

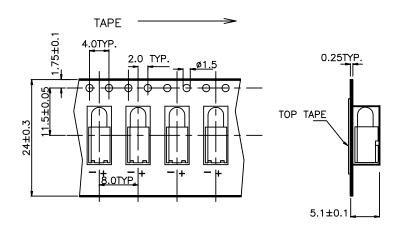

SPEC NO: DSAA2263 APPROVED: J. Lu REV NO: V.2 CHECKED: DATE: OCT/02/2001 DRAWN: S.S. Wu PAGE: 4 OF 4