

Photocoupler

Part Name: LA211

LA211 photocoupler is an optically coupled pair employing a GaAs infrared LED and a silicon NPN phototransistor.


Features

- SOP package 4 Pin type in miniature design
- 80% minimum current transfer ratio
- 1500Vrms Input/Output isolation

Applications

- Computer terminals
- System appliances
- Signal transmission between circuits of different potentials

Dimensions(Unit: mm inch)

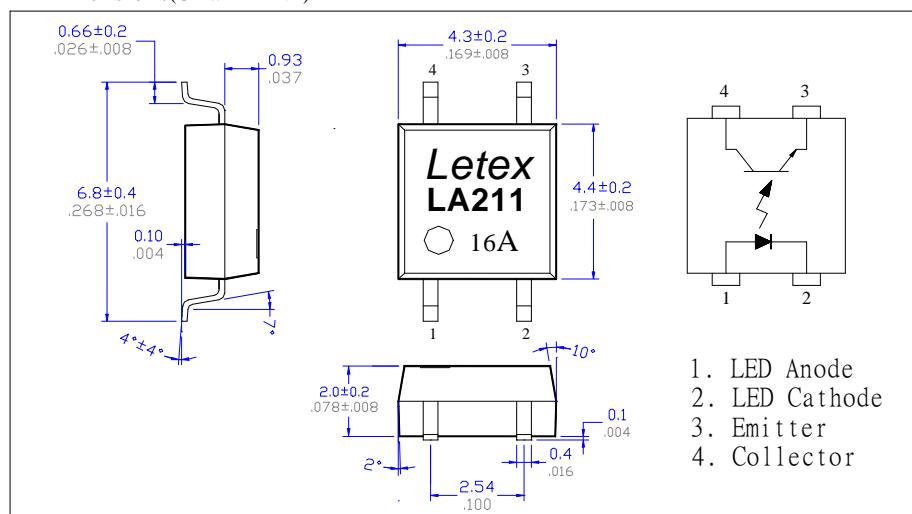

Photocoupler
Part Name: LA211

Absolute Maximum Ratings (Ambient Temperature: 25°C)

Item	Symbol	Rating	Units	Note
Input	Forward Current	IF	50	mA
	Reverse Voltage	V _R	5	V
	Peak Forward Current	IFP	1	A
Output	Collector to Emitter Voltage	V _{ceo}	40	V
	Emitter to Collector Voltage	V _{eco}	6	V
	Collector Current	I _c	50	mA
	Power Dissipation	P _c	150	mW
I/O Breakdown Voltage	V _{I/O}	1500	V _{rms}	RH=60%, 1min
Power Dissipation	P _D	200	mW	
Storage Temperature	T _{stg}	-55 to +125	°C	
Operating Temperature	T _{op}	-55 to +100	°C	
Soldering Temperature	T _{Sol}	260	°C	10 seconds max.

Electrical Specifications (Ambient Temperature: 25°C)

Item	Symbol	MIN.	TYP.	MAX.	Units	Conditions	
Input	Forward Voltage	V _F		1.2	1.4	V	
	Reverse Current	I _R		10	μA	V _R =5V	
	Junction Capacitance	C _t		25	pF	V=0, f=1.0MHz	
Output	C-E Breakdown Voltage	V _{ceo}	35		V	I _c =0.5mA	
	E-C Breakdown Voltage	V _{eco}	5		V	I _e =0.1mA	
	Collector Dark Current	I _{ceo}		100	nA	V _{ce} =10V, IF=0	
	Current Transfer Ratio	CTR	BIN GRADE			% IF=5mA, V _{ce} =5V	
Coupled			A	80			
			B	130			
			C	200			
			D	300			
Collector Saturation Voltage	V _{ce(sat)}			0.4	V	IF=10mA, I _c =1mA	
Isolation Resistance	R _{I/O}	10 ⁹			Ω	V=500V DC	
Isolation Capacitance	C _{I/O}		1.0		pF	V=0, f=1.0MHz	
Rise Time	tr			3	μs	V _{ce} =5V, I _c =2mA,	
Fall Time	tf			3	μs	RL=100Ω	

Photocoupler Reference Data

