

**SUPER FAST
GLASS PASSIVATED RECTIFIERS**

REVERSE VOLTAGE - **100 to 600** Volts
FORWARD CURRENT - **3.0** Amperes


FEATURES

- Glass passivated chip
- Super fast switching time for high efficiency
- Low forward voltage drop and high current capability
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

MECHANICAL DATA

- Case : JEDEC DO-201AD molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.04 ounces, 1.1 grams
- Mounting position : Any

DO-201AD

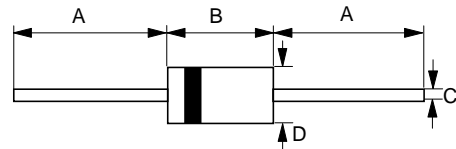

| DO-201AD | | |
|------------------------------|------|------|
| Dim. | Min. | Max. |
| A | 25.4 | - |
| B | 7.30 | 9.50 |
| C | 1.20 | 1.30 |
| D | 4.80 | 5.30 |
| All Dimensions in millimeter | | |

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

| CHARACTERISTICS | SYMBOL | SF30BG | SF30DG | SF30FG | SF30GG | SF30HG | SF30JG | UNIT |
|--|------------------|-------------|--------|--------|--------|--------|--------|------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 100 | 200 | 300 | 400 | 500 | 600 | V |
| Maximum RMS Voltage | V _{RMS} | 70 | 140 | 210 | 280 | 350 | 420 | V |
| Maximum DC Blocking Voltage | V _{DC} | 100 | 200 | 300 | 400 | 500 | 600 | V |
| Maximum Average Forward Rectified Current @T _A =55°C | I(AV) | 3.0 | | | | | | A |
| Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load (JEDEC Method) | I _{FSM} | 125 | | | | | | A |
| Maximum forward Voltage at 3.0A DC | V _F | 0.95 | | 1.25 | | 1.3 | | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25°C @T _J =100°C | I _R | 5 100 | | | | | | uA |
| Maximum Reverse Recovery Time (Note 1) | T _{RR} | 35 | | 40 | | 50 | | ns |
| Typical Junction Capacitance (Note 2) | C _J | 70 | | | | 45 | | pF |
| Typical Thermal Resistance (Note 3) | R _{θJA} | 20 | | | | | | °C/W |
| Operating Temperature Range | T _J | -55 to +150 | | | | | | °C |
| Storage Temperature Range | T _{STG} | -55 to +150 | | | | | | °C |

NOTES : 1.Measured with I_F=0.5A,I_R=1.0A,I_{RR}=0.25A.

2.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3.Thermal Resistance Junction to Ambient.

REV. 2, 01-Dec-2000, KDFG01

