

SCHOTTKY BARRIER RECTIFIERS

REVERSE VOLTAGE - **20 to 60** Volts
 FORWARD CURRENT - **2.0** Amperes


FEATURES

- Metal-Semiconductor junction with guard ring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

MECHANICAL DATA

- Case : JEDEC DO-15 molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.015 ounces, 0.4 grams
- Mounting position : Any

DO-15

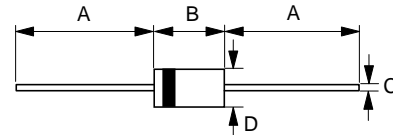

DO-15		
Dim.	Min.	Max.
A	25.4	-
B	5.80	7.60
C	0.71 \varnothing	0.86 \varnothing
D	2.60 \varnothing	3.60 \varnothing
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	SB220	SB230	SB240	SB250	SB260	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	V
Maximum Average Forward Rectified Current @T _A =75°C	I(AV)	2.0					A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load	I _{FSM}	60					A
Maximum forward Voltage at 2.0A DC	V _F	0.55			0.7		V
Maximum forward Voltage at 1.5A DC		-----			0.65		
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25°C @T _J =100°C	I _R	0.5			15		mA
Typical Thermal Resistance (Note 1)	R _{θJA}	20			°C/W		
Typical Junction Capacitance (Note 2)	C _J	150			pF		
Operating Temperature Range	T _J	-55 to +125			°C		
Storage Temperature Range	T _{STG}	-55 to +150			°C		

NOTES : 1.Thermal Resistance Junction to Ambient.
 2.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

