

SCHOTTKY BARRIER RECTIFIERS

REVERSE VOLTAGE - 70 to 100 Volts
FORWARD CURRENT - 10 Amperes


FEATURES

- Metal of silicon rectifier, majority carrier conduction
- Guard ring for transient protection
- Low power loss, high efficiency
- High current capability, low VF
- High surge capacity
- Plastic package has UL flammability classification 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case : TO-220AB molded plastic
- Polarity : As marked on the body
- Weight : 0.08 ounces, 2.24 grams
- Mounting position : Any

TO-220AB

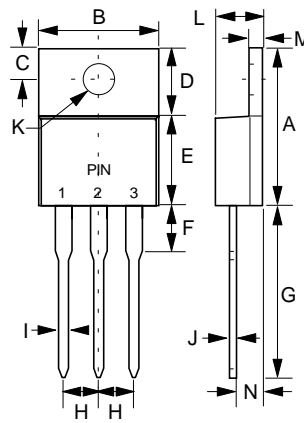

TO-220AB		
DIM.	MIN.	MAX.
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	8.26	9.28
F	-	6.35
G	12.70	14.73
H	2.29	2.79
I	0.51	1.14
J	0.30	0.64
K	3.53 \varnothing	4.09 \varnothing
L	3.56	4.83
M	1.14	1.40
N	2.03	2.92

All Dimensions in millimeter

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	MBR1070CT	MBR1080CT	MBR1090CT	MBR10100CT	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	70	80	90	100	V
Maximum RMS Voltage	VRMS	49	56	63	70	V
Maximum DC Blocking Voltage	VDC	70	80	90	100	V
Maximum Average Forward Rectified Current at TC=100°C (See Fig.1)	IAV	10				A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC METHOD)	IFSM	120				A
Voltage Rate of Change (Rated VR)	dv/dt	10000				V/us
Maximum Forward Voltage, (Note 1)	VF	@IF=5A TJ=25°C 0.85 @IF=5A TJ=125°C 0.75 @IF=10A TJ=25°C 0.95 @IF=10A TJ=125°C 0.85				V
Maximum DC Reverse Current at Rated DC Blocking Voltage	IR	@TJ=25°C 0.1 @TJ=125°C 15				mA
Typical Junction Capacitance, per element (Note 2)	CJ	300				pF
Typical Thermal Resistance (Note 3)	RθJC	3.0				°C/W
Operating Temperature Range	TJ	-55 to +150				°C
Storage Temperature Range	TSTG	-55 to +175				°C

NOTES : 1. 300us Pulse Width, 2% Duty Cycle.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal Resistance Junction to Case.

REV. 2, 13-Sep-2001, KTHC13

