

Quadrature Hybrid

20 - 140 MHz

JH-10-4

V2.00

Features


- Multi-Octave Bandwidth
- Low VSWR: 1.25:1
- Amplitude Balance: 0.6 dB
- Impedance: 50 Ohms Nom.
- Input Power: 1 W. Max.
- MIL-STD-202 Screening Available

Guaranteed Specifications* (From -55°C to +85°C)

Frequency Range	20 - 140 MHz
Insertion Loss (Less coupling)	1.0 dB Max.
Isolation	20 dB Min.
Amplitude Balance	0.6 dB Max.
VSWR	1.25:1 Max.
Deviation From Quadrature	3° Max.

*All specifications apply with 50 ohm source and load impedance.

C-10

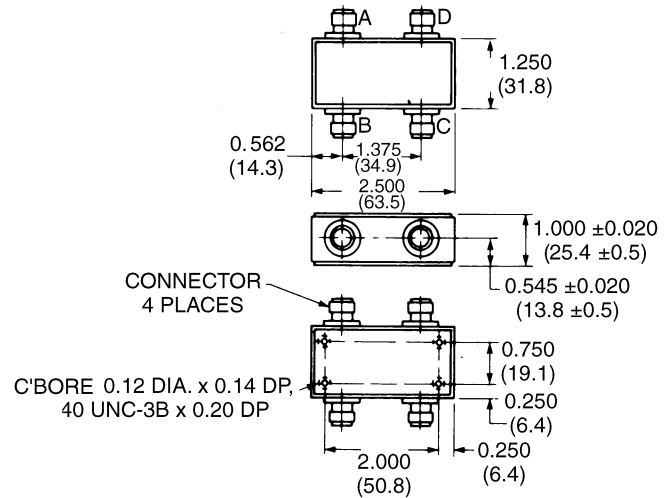

Phasing Diagram

OUT \ IN	A	B	C	D
A	X	ISO.	0°	-90°
B	ISO.	X	-90°	0°
C	0°	-90°	X	ISO.
D	-90°	0°	ISO.	X

Ordering Information





Part Number	Package
JH-10-4 BNC	Connectorized
JH-10-4 SMA	Connectorized

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020

Typical Performance

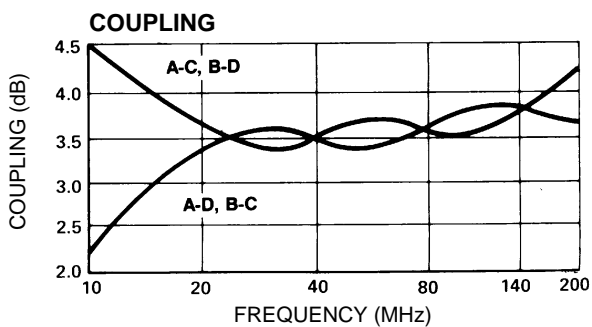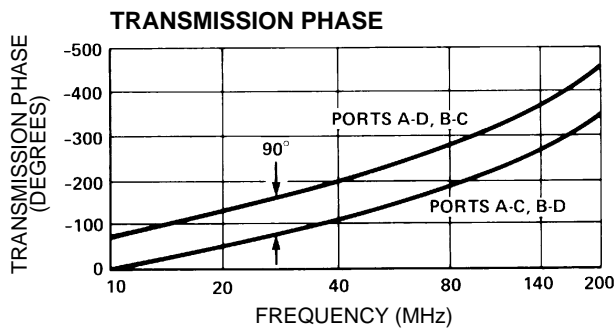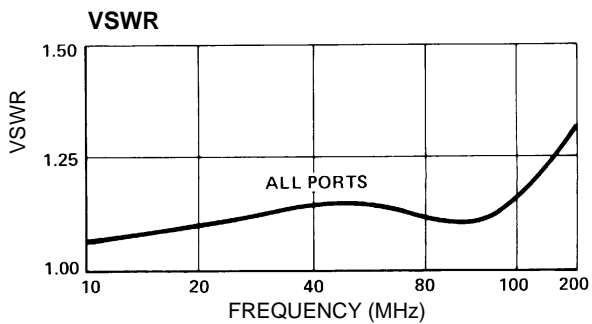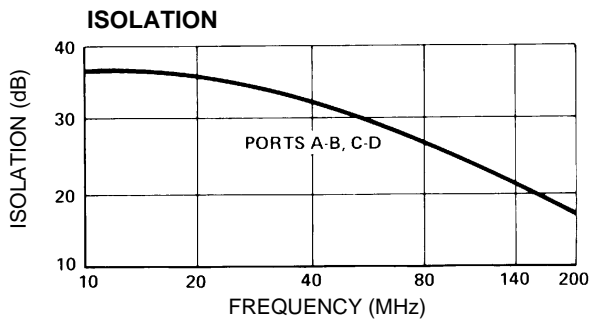

Specifications Subject to Change Without Notice.