

# E-Series I/Q Modulator

## 140 - 160 MHz

# EKIN2-150W

V3.00

### Features

- High Carrier Suppression
- High 3I and 5I Suppression

### Specifications @ 25°C

Frequency Range (LO) Carrier I/Q		140 - 160 MHz DC - 11 MHz
(LO) Carrier Suppression <sup>1</sup>	Typical 34 dBc	Minimum 30 dBc
SSB Rejection <sup>1</sup>	Typical 34 dBc	Minimum 30 dBc
Harmonic Suppression <sup>1</sup> 3 x I/Q 5 x I/Q	Typical 42 dBc 60 dBc	Minimum 40 dBc 55 dBc
Conversion Loss	Typical 7.0 dBc	Maximum 9.0 dB
(LO) Carrier Power		10 dB ±1 dBm
I/Q Drive Level		-10 dBm

1. When Q = -90 degrees relative to I; Lower sideband is suppressed. Related to wanted sideband power.

### Operating Characteristics

Impedance	50 Ohms Nominal
-----------	-----------------


### Ordering Information

<b>Part No.</b>	<b>Packaging</b>
EKIN2-150W	Tube
EKIN2-150WTR	Forward Tape & Reel

### Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temp.	-10°C to +70°C
Storage Temp.	-55°C to +100°C
Pin Temp (10 sec)	260°C

### SM-28

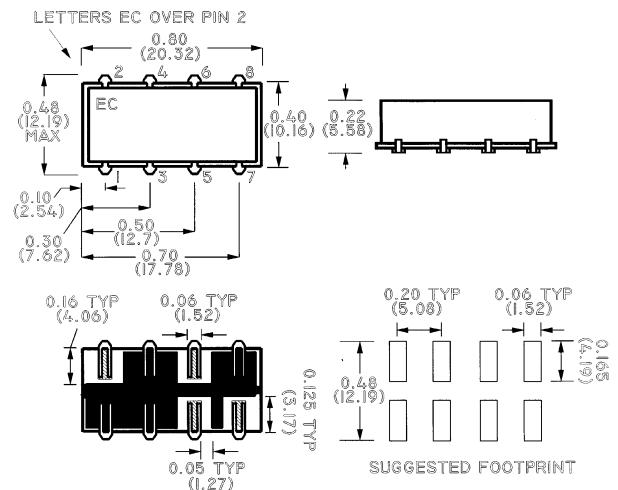

### Pin Configuration

Function	Pin No.
LO	1
RF	8
I	5
Q	6
Case Ground	2,3,4,7

S 0891 B

M/A-COM, Inc. Specifications Subject to Change Without Notice.

1

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595  
Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020