

Termination-Insensitive Mixer, 1 - 1500 MHz

MD-160

Features

- Third Order Intermodulation Ratio is Insensitive to Port Mismatches
- Conversion Loss: 7 dB Typical Midband
- VSWR: Typically Less than 1.5:1 @ Midband
- Impedance: 50 Ohms Nominal
- Maximum Input Power: 350 mW max. @ 25°C, Derated to 85°C @ 3.5 mW/°C
- MIL-STD-883 Screening Available

Description


The unique design of the termination insensitive mixer (TIM) enables it to apply high reverse voltage to diodes during their “off” phase, in the LO cycle. This allows for higher power level performance with minimum distortion. In addition the TIM has internal loads that provide a good match and also absorb mixer generated LO frequency terms. Combined, these features give the mixer its insensitivity to external mismatches, plus superior VSWR.

Pin Configuration

Pin No.	Function	Pin No.	Function
1	LO	5	GND
2	GND	6	GND
3*	IF	7*	IF
4	GND	8	RF

* P3 and P7 are connected together to make IF Port.

RH-3

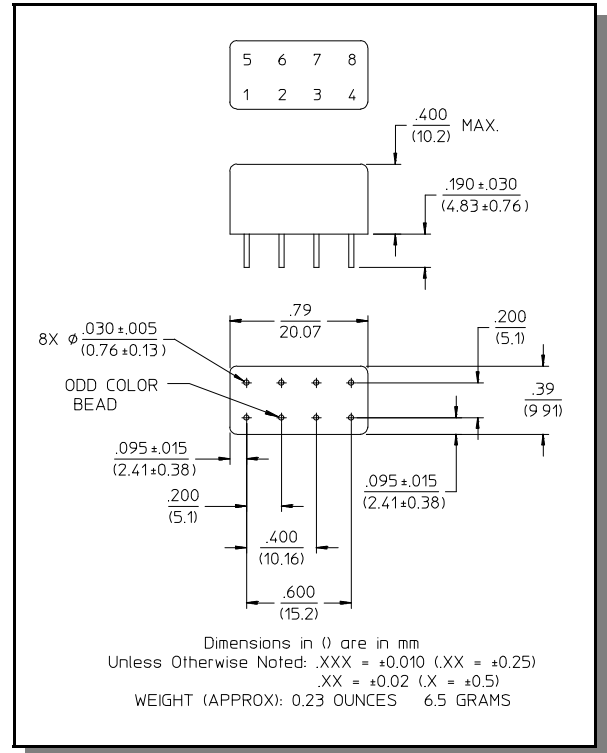

Electrical Specifications¹: T_A = -55°C to +85°C

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Frequency Range	RF, LO Ports IF Port (3 dB BW)	1 - 1500 1 - 1000	MHz MHz	— —	— —	— —
Conversion Loss ²		5 - 1000 MHz 1 - 1500 MHz	dB dB	— —	— —	7.5 9.0
Isolation	LO to RF	1 - 5 MHz 5 - 500 MHz 500 - 1500 MHz	dB dB dB	20 28 25	— — —	— — —
	LO to IF	1 - 5 MHz 5 - 500 MHz 500 - 1500 MHz	dB dB dB	20 28 17	— — —	— — —
	RF to IF	1 - 5 MHz 5 - 500 MHz 500 - 1500 MHz	dB dB dB	20 25 17	— — —	— — —
RF Input	1 dB Compression ³ 1 dB Desensitization ³		dBm dBm	— —	+15 +13	— —

1. All specifications apply when operated at +13 dBm available LO power with 50 ohm source and load impedance.

2. For IF Frequencies of 5 - 1000 MHz and an RF of -10 dBm or lower.


3. These characteristics apply @ +20 dBm LO power.

Electrical Specifications: $T_A = -55^{\circ}\text{C}$ to $+85^{\circ}\text{C}$


Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
SSB Noise Figure	Within 1 dB of Conversion Loss Max.	—	—	—	—	—
3rd Order Input Intercept	$P_{LO} + 13\text{ dBm}$	15 MHz	dBm	—	+18	—
		500 MHz	dBm	—	+20	—
3rd Order Input Intercept	$P_{LO} + 20\text{ dBm}$	1000 MHz	dBm	—	+19	—
		15 MHz	dBm	—	+23	—
3rd Order Input Intercept	$P_{LO} + 20\text{ dBm}$	500 MHz	dBm	—	+25	—
		1000 MHz	dBm	—	+25	—
3rd Order Intercept Degradation	@ IF VSWR 3.0:1	—	dB	—	3	—

Typical Performance Curves


Conversion Loss

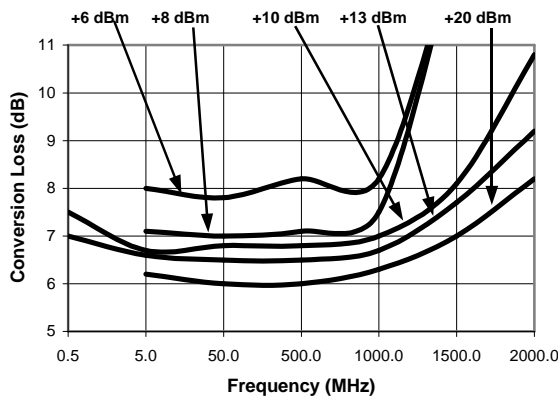


Isolation

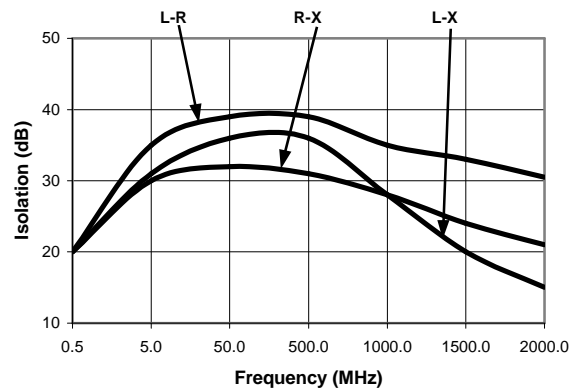

3rd Order Intercept

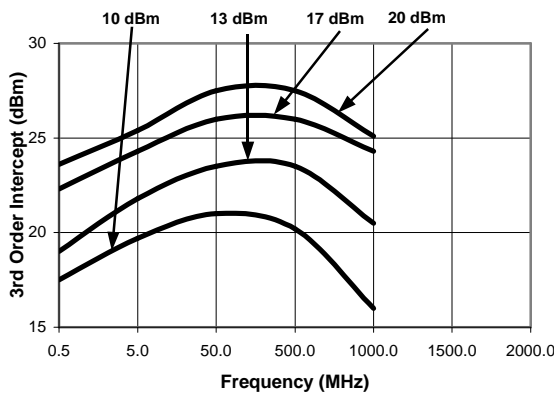

3rd Order intercept vs. IF Port Termination

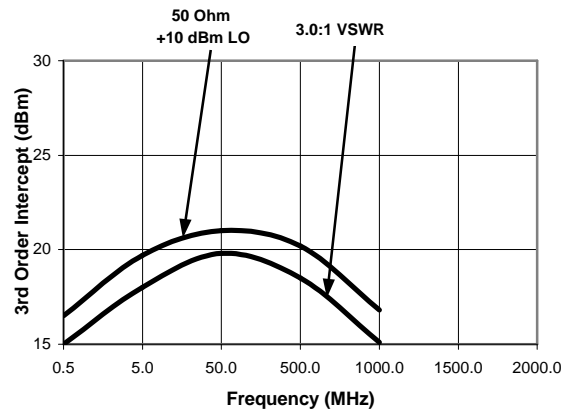


Specifications subject to change without notice.

- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020


Visit www.macom.com for additional data sheets and product information.

Typical Performance Curves

IF Port Response

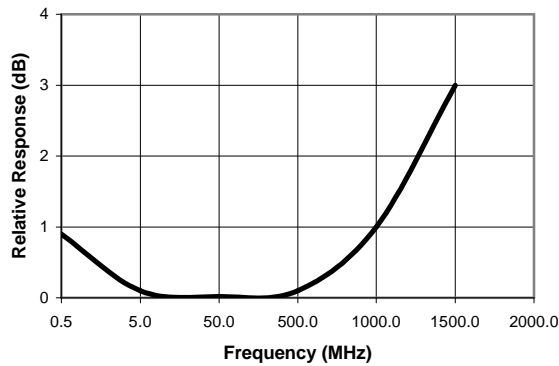

VSWR

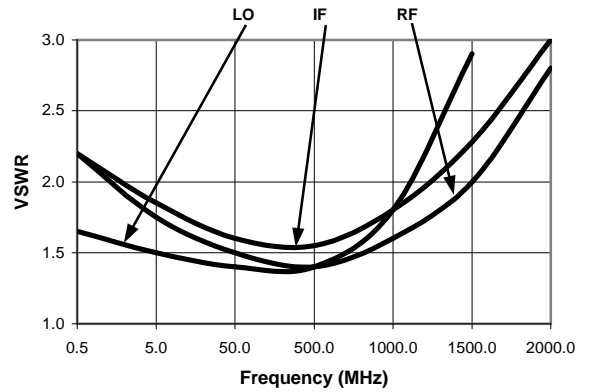

Ordering Information

Part Number	Package
MD-160 PIN	RH-3

Specifications subject to change without notice.

- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit www.macom.com for additional data sheets and product information.