

Absolute Maximum Ratings


Parameter	Absolute Maximum
Operating Temperature	-10°C to +70°C
Storage Temperature	-55°C to +100°C
Impedance	50 Ohms Nominal
RF Power (1dB Compression)	4 dBm Max

Functional Configuration


Function	Pin No.
LO	1
RF	8
I	5
Q	6
External 50 Ohms	—
Case Ground	2,3,4,7
Not Connected	—

Typical Performance @ +25°C


Conversion Loss

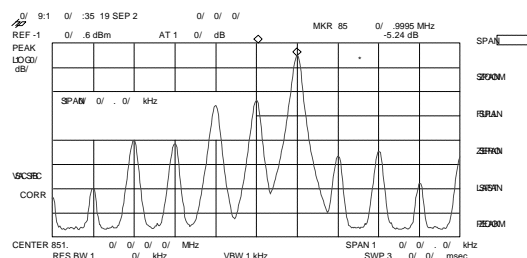


Amplitude Unbalance

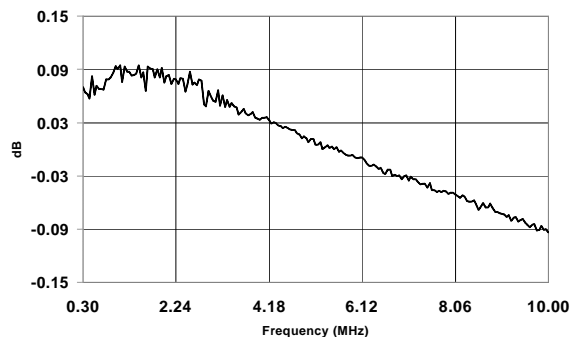


Phase Unbalance

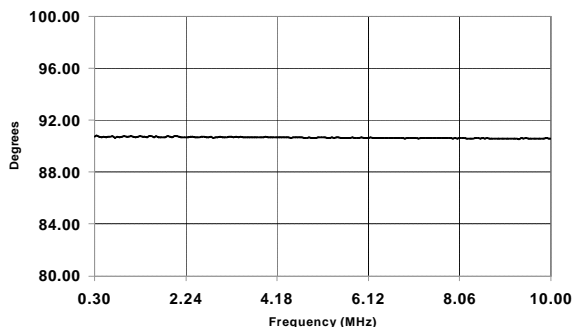

L-R Isolation

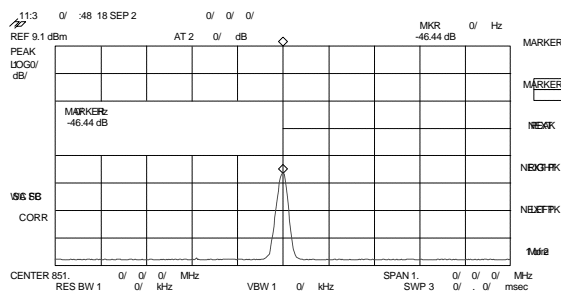

L-I Isolation

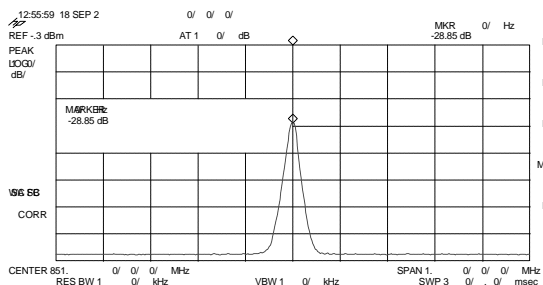

L-Q Isolation

