

MAS9164

50 mA LDO Voltage Regulator IC

This is preliminary information on a new product under development. Micro Analog Systems Oy reserves the right to make any changes without notice.

Preliminary

- Only 10 μA Ground Pin Current at 1 mA Load Current
- Good Transient Performance
- Low Dropout Voltage: 150 mV
- Low Noise
- Enable/Disable Control
- Stable with Low-ESR Output Capacitors

DESCRIPTION

MAS9164 is LDO voltage regulator with a low ground pin current of 10 μA which combined with the good overall performance makes MAS9164 highly suitable for providing power to continuously working low power circuits. This is beneficial especially in applications where standby periods are long and in portable applications where long battery life is essential

In addition to the low ground pin current, MAS9164 excels in dropout voltage (150 mV typical at 50 mA). Even though MAS9164 does not use an external bypass capacitor, the noise level (100 Hz... 100 kHz) is only 100 μVrms with 1 μF output capacitor.

The Equivalent Series Resistance (ESR) range of output capacitors that can be used with MAS9164 is very wide. This ESR range from a few m Ω up to a couple of Ohms combined with no minimum output current requirement makes the usage of MAS9164 easier and low in cost.

Enable/disable pin allows MAS9164 to be turned off or on. In order to save power the device enters the sleep mode when the regulator is disabled.

An internal thermal protection circuit prevents the device from overheating. Also the maximum output current is internally limited.


FEATURES

- Extremely Low Current Consumption
- Good Transient Performance
- Output Accuracy $< \pm 3.3\%$
- Internal Thermal Shutdown
- Short Circuit Protection
- Thin SOT (TSOT 5) Package
- Output Voltage Option: 1.8 V, see Ordering Information p. 10

APPLICATIONS

- Continuously Working Low Power Circuits
- Digital Circuits
- Real-Time Clocks (RTC)
- SRAMs
- CMOS Backup Power
- Cellular Phones
- Portable Systems
- Smoke Detectors

PIN CONFIGURATION

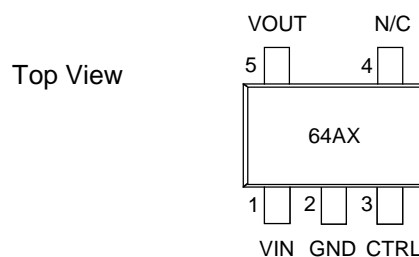


Top Marking Information:
64A4 = 1.8 V

PIN DESCRIPTION

Pin Name	Pin	Type	Function
VIN	1	P	Power Supply Voltage
GND	2	G	Ground
CTRL	3	I	Enable/Disable Pin for Regulator
N/C	4	-	Not Connected
VOUT	5	O	Output

G = Ground, I = Input, O = Output, P = Power

BLOCK DIAGRAM

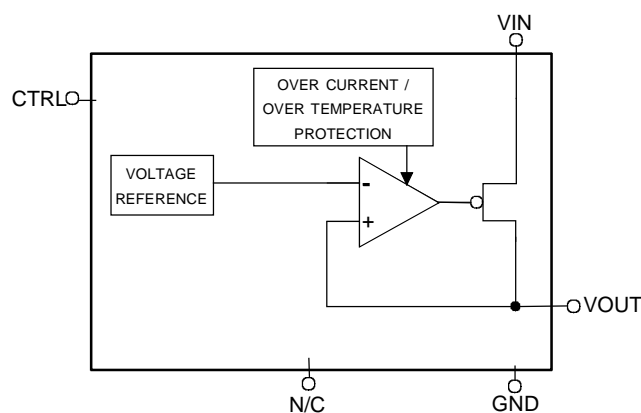

ABSOLUTE MAXIMUM RATINGS

All voltages with respect to ground.

Parameter	Symbol	Conditions	Min	Max	Unit
Supply Voltage	V_{IN}		-0.3	6	V
Voltage Range for All Pins			-0.3	$V_{IN} + 0.3$	V
ESD Rating		HBM		2	kV
Junction Temperature	T_{Jmax}			+175 (limited)	°C
Storage Temperature	T_S		-55	+150	°C

Stresses beyond those listed may cause permanent damage to the device. The device may not operate under these conditions, but it will not be destroyed.

RECOMMENDED OPERATING CONDITIONS

All voltages with respect to ground.

Parameter	Symbol	Conditions	Min	Max	Unit
Operating Junction Temperature	T_J		-40	+125	°C
Operating Ambient Temperature	T_A		-40	+85	°C
Operating Supply Voltage	V_{IN}		2.2	5.3	V

ELECTRICAL CHARACTERISTICS

$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$, typical values at $T_A = +27^\circ\text{C}$, $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$, $I_{OUT} = 1\text{ mA}$, $C_{IN} = 1\ \mu\text{F}$, $C_L = 1.0\ \mu\text{F}$, $V_{CTRL} = 2\text{ V}$, unless otherwise specified.

◆ Thermal Protection

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Threshold	T		130	150	175	$^\circ\text{C}$

◆ Control Terminal Specifications

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Control Voltage OFF State ON State	V_{CTRL}		-0.3 1.2		0.5 $V_{IN} + 0.3$	V
Control Current	I_{CTRL}	$V_{CTRL} = 1.2\text{ V}$ $V_{CTRL} = 2.8\text{ V}$ $V_{CTRL} = 5.3\text{ V}$		0.07 0.37 0.84	0.7	μA

◆ Voltage Parameters

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output Voltage Tolerance	V_{OUT}	$I_{OUT} = 0\text{ mA}$ $I_{OUT} = 50\text{ mA}$	$V_{OUT(NOM)} - 0.06$ $V_{OUT(NOM)} - 0.08$		$V_{OUT(NOM)} + 0.06$ $V_{OUT(NOM)} + 0.06$	V
Dropout Voltage	V_{DROP}	$I_{OUT} = 1\text{ mA}$ $I_{OUT} = 10\text{ mA}$ $I_{OUT} = 50\text{ mA}$		5 50 150		mV

◆ Current Parameters

Parameter	Symbol	Conditions	Min	Typ	Max	Unit	
Continuous Output Current	I_{OUT}				50	mA	
Short Circuit Current	I_{MAX}	$R_L = 0\ \Omega$		150		mA	
Peak Output Current	I_{PK}	$V_{OUT} > 95\% * V_{OUT(NOM)}$		80		mA	
Ground Pin Current	I_{GND}	$I_{OUT} = 0\text{ mA}$ $I_{OUT} = 1\text{ mA}$ $I_{OUT} = 10\text{ mA}$ $I_{OUT} = 50\text{ mA}$		9 10 20 55		μA	
Ground Pin Current, Sleep Mode	I_{GND}	$V_{CTRL} < 0.3\text{ V}$	$T_A = +27^\circ\text{C}$		0.01	0.5	μA
			$T_A = +85^\circ\text{C}$		0.2	4	

◆ Power Dissipation

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Thermal Resistance (Junction-to-Air)	R_{JA}	Typical PC board mounting, still air		255.9		°C/W
Maximum Power Dissipation	P_d	any ambient temperature	$P_{dMAX} = \frac{T_{J(MAX)} - T_A}{R_{JA}}$ Note 1			W

Note 1: $T_{J(MAX)}$ denotes maximum operating junction temperature (+125°C), T_A ambient temperature, and R_{JA} junction-to-air thermal resistance (+255.9°C/W).

◆ Line and Load Regulation

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Line Regulation		$V_{OUT(NOM)} + 1 V < V_{IN} < 5.3 V$, $I_{OUT} = 10 \text{ mA}$		1.0		mV
Load Regulation		$I_{OUT} = 1.0 \text{ to } 50 \text{ mA}$		7.5	15	mV

◆ Noise and Ripple Rejection

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Output Noise Voltage	V_{RMS}	100 Hz < f < 100 kHz, $I_{OUT} = 10 \text{ mA}$		100		μV_{rms}
Noise Density	V_N	$I_{OUT} = 10 \text{ mA}$, f = 10 kHz		300		$\frac{nV}{\sqrt{Hz}}$
PSRR		$I_{OUT} = 1 \text{ mA}$ f = 1 kHz		50		dB
		f = 10 kHz		30		dB
		$I_{OUT} = 10 \text{ mA}$ f = 1 kHz		50		dB
		f = 10 kHz		30		dB

◆ Dynamic Parameters

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Start-up Delay		$V_{CTRL} = 0 \text{ to } 2.4 V$, $I_{OUT} = 10 \text{ mA}$ (see figure 1 below)		1.5		ms
Overshoot		$V_{CTRL} = 0 \text{ to } 2.4 V$		1.0	8.0	%

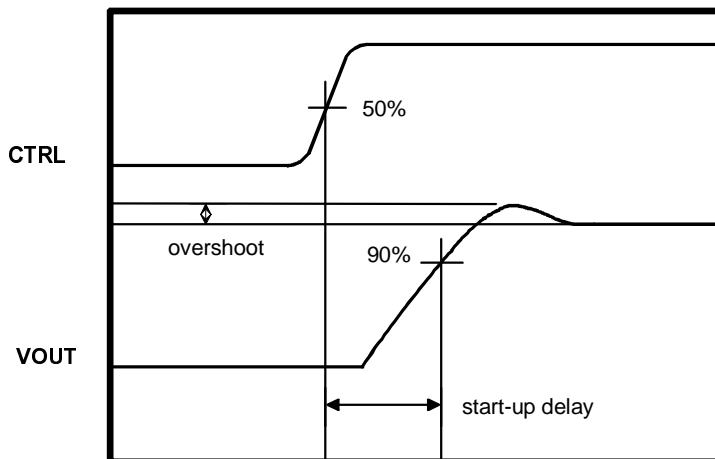


Figure 1. Definitions of overshoot and start-up delay

DETAILED DESCRIPTION

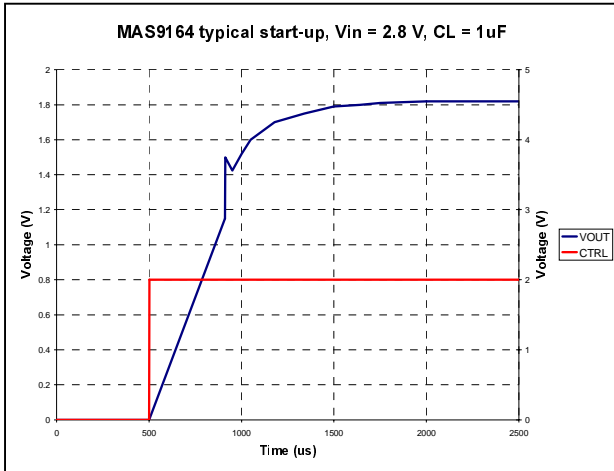


Figure 2. Typical start-up.

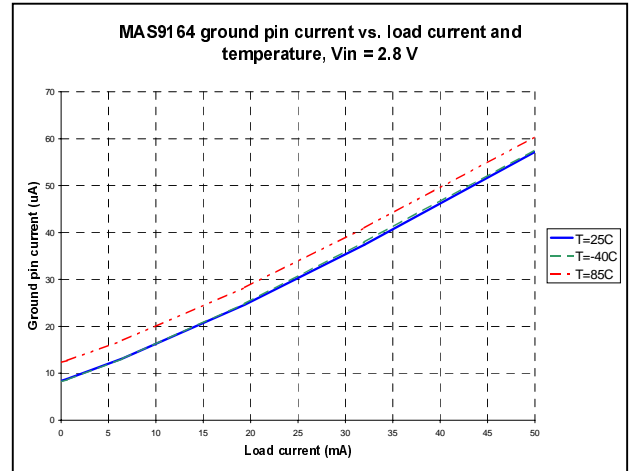


Figure 5. Ground pin current vs. load current and temperature.

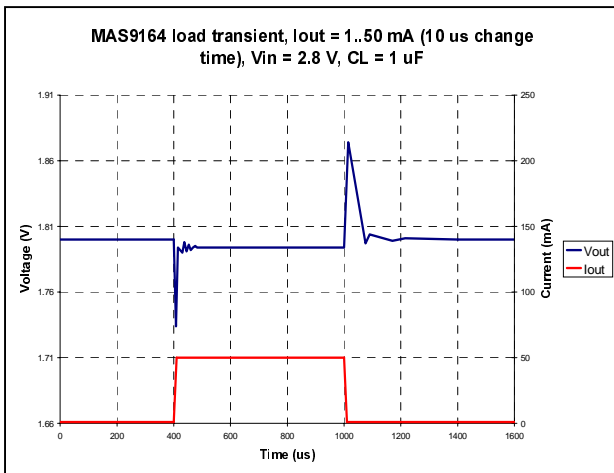


Figure 3. Load transient response.

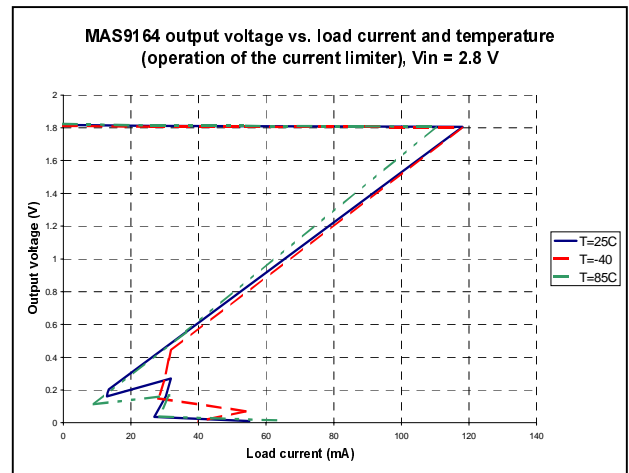


Figure 6. Output voltage vs. load current (operation of the current limiter).

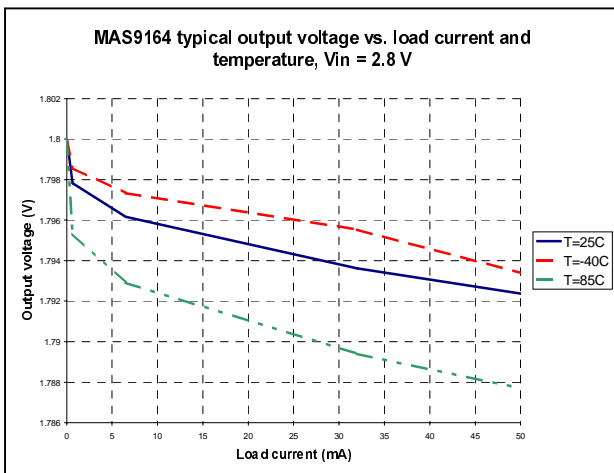


Figure 4. Output voltage vs. load current and temperature.

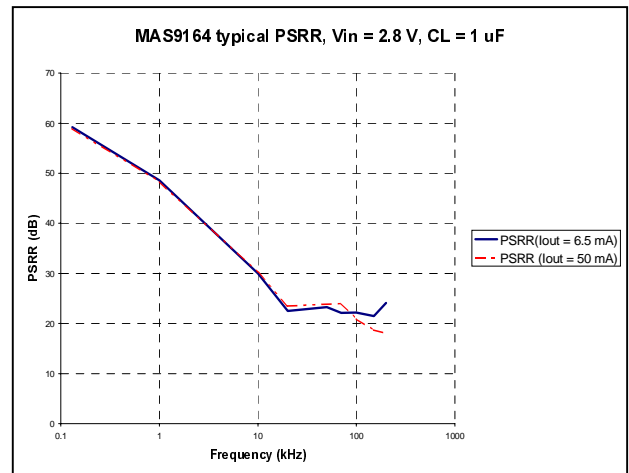


Figure 7. PSRR vs. frequency. $I_{OUT}=6.5\text{ mA}$ & 50 mA .

DETAILED DESCRIPTION

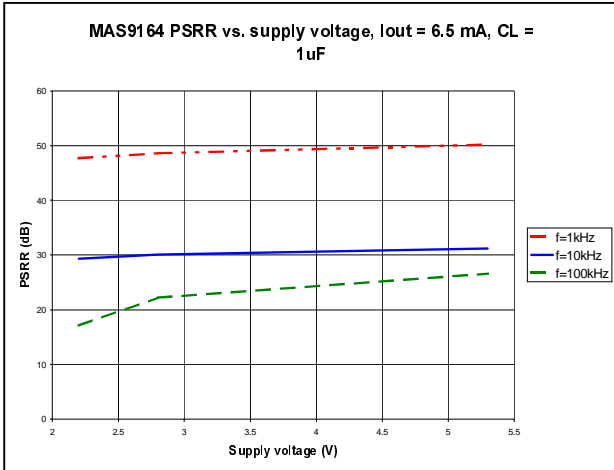


Figure 8. PSRR vs. supply voltage and frequency.

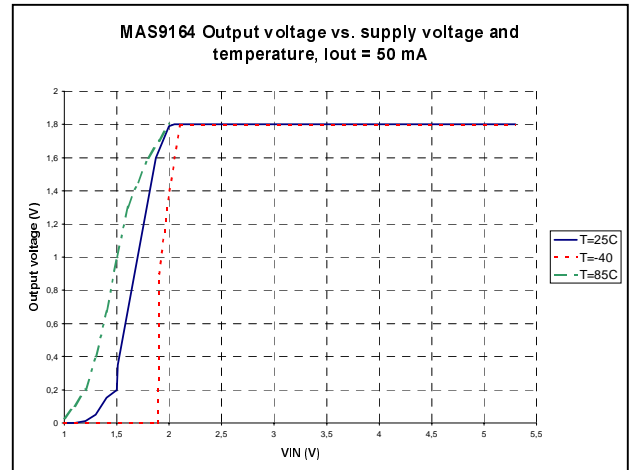


Figure 10. Output voltage vs. supply voltage and temperature.

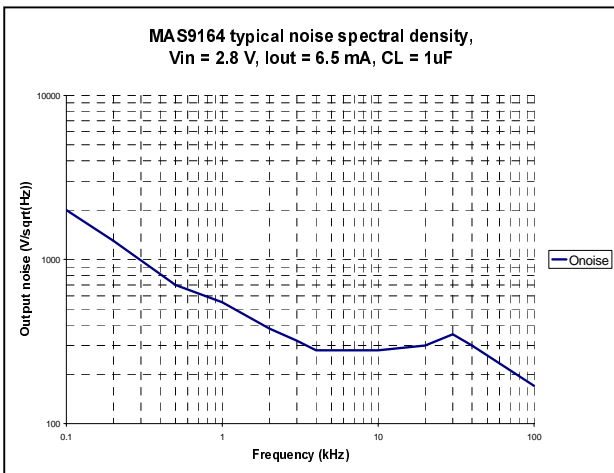


Figure 9. Typical noise spectral density, $C_L = 1 \mu F$.


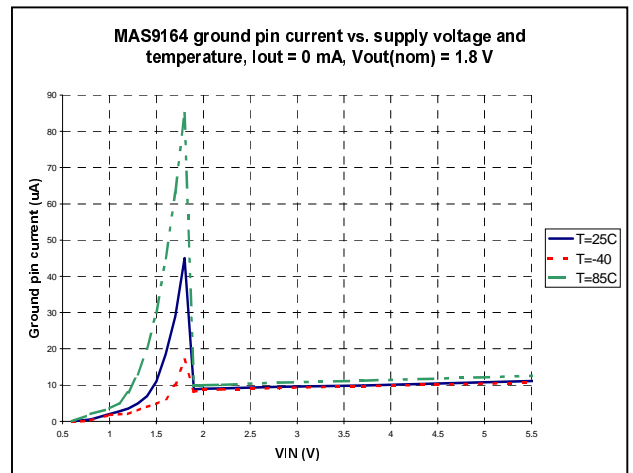


Figure 11. Ground pin current vs. supply voltage and temperature.

APPLICATION INFORMATION

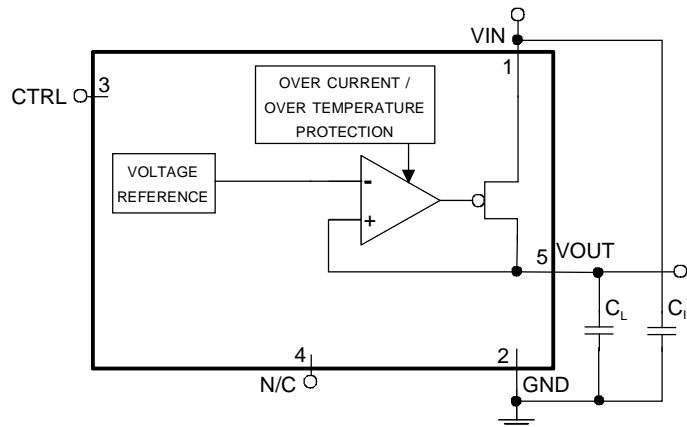


N.B.! CTRL-pin has to be connected, i.e., it shall not be left floating.

Parameter	Symbol	Min	Typ	Max	Unit	Note
Output Capacitance	C_L	0.6	1.0		μF	1. Ceramic, film capacitors can be used.
Effective Series Resistance	ESR	0.005		3	Ohm	1. When within this range stable with all $I_{OUT} = 0 \text{ mA} \dots 50 \text{ mA}$ values
Input Capacitance	C_{IN}	0.23			μF	1. A big enough input capacitance is needed to prevent possible impedance interactions between the supply and MAS9164. 2. Ceramic, tantalum, and film capacitors can be used. If using a tantalum capacitor, it should be checked that surge current rating is sufficient for the application. 3. In the case that the inductance between a battery and MAS9164 is very small ($< 0.1 \mu\text{H}$) $0.22 \mu\text{F}$ input capacitor is sufficient.

Values given on the table are minimum requirements unless otherwise specified. When selecting capacitors, tolerance and temperature coefficient must be considered to **make sure that the requirement is met in all potential operating conditions.**

PACKAGE (TSOT 5) OUTLINE

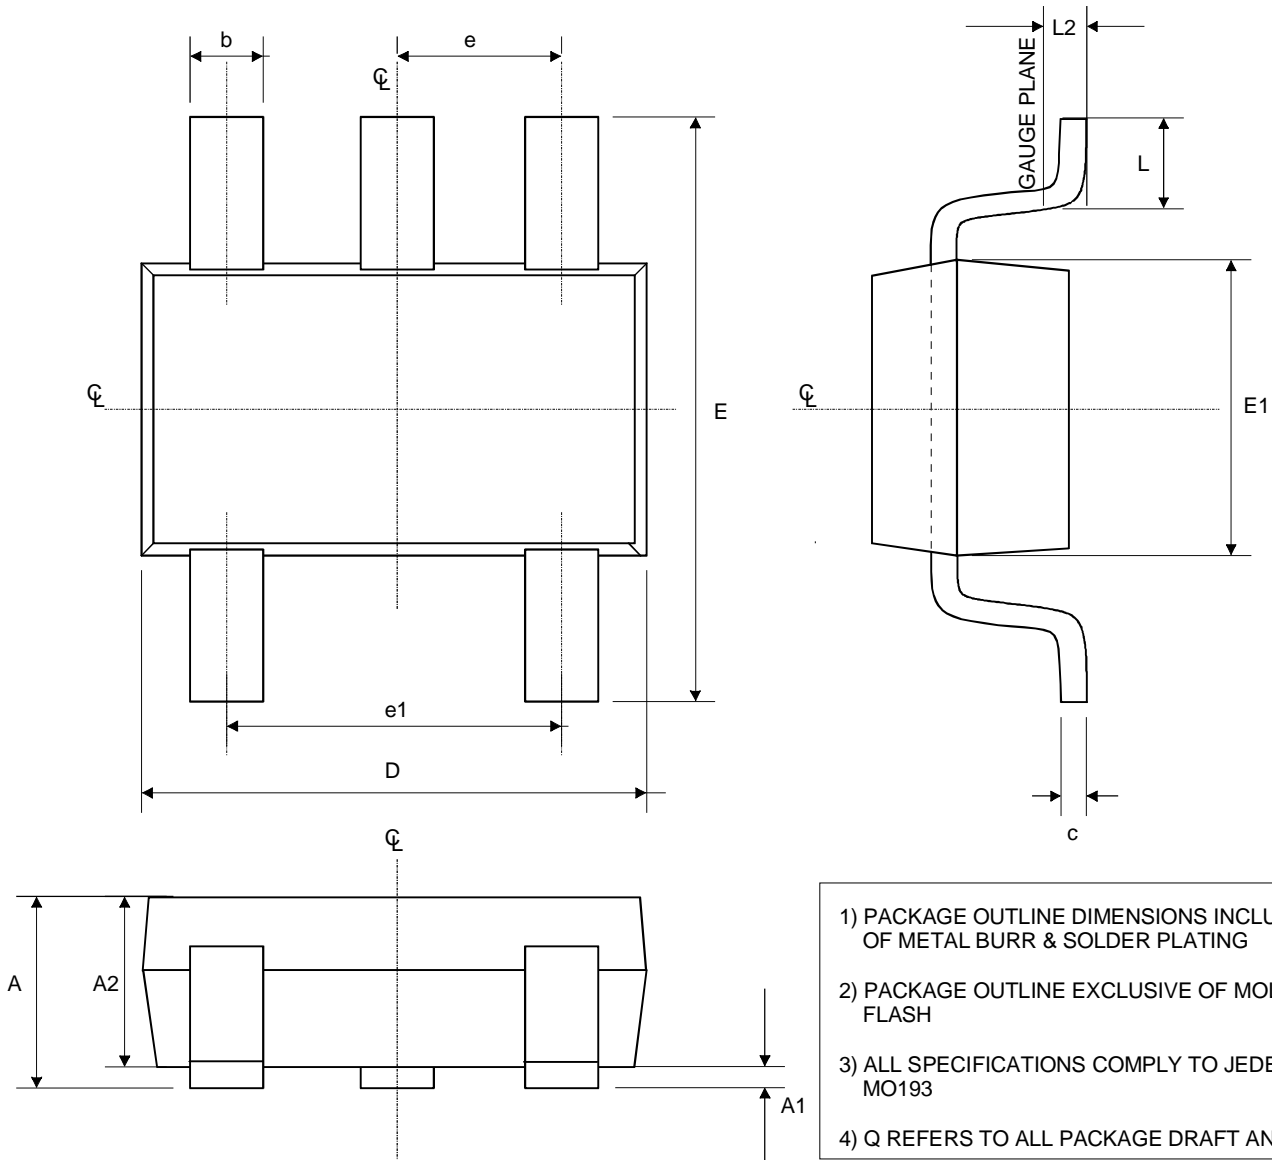


Symbol	Min	Nom	Max	Unit
A	--	--	1.00	mm
A1	0.01	0.05	0.10	mm
A2	0.84	0.87	0.90	mm
b	0.30	--	0.45	mm
c	0.12	0.127	0.20	mm
D		2.90BSC		mm
E		2.80BSC		mm
E1		1.60BSC		mm
e		0.95BSC		mm
e1		1.90BSC		mm
L	0.30	0.40	0.50	mm
L2		0.25BSC		mm
Q	4°	10°	12°	

SOLDERING INFORMATION

Resistance to Soldering Heat	According to RSH test IEC 68-2-58/20 2*220°C
Maximum Reflow Temperature	235°C
Maximum Number of Reflow Cycles	2
Seating Plane Co-planarity	max 0.08 mm
Lead Finish	Solder plate 7.62 - 25.4 µm, material Sn 85% Pb 15%

TAPE & REEL SPECIFICATIONS

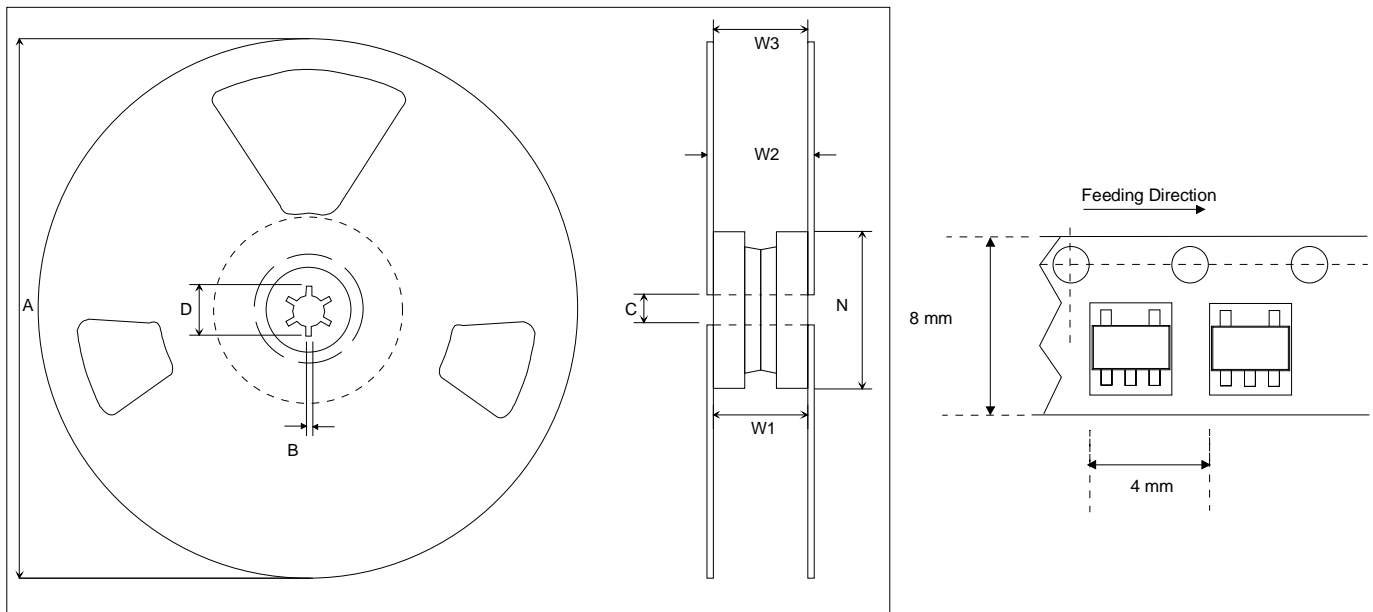

Other Dimensions according to EIA-481 Standard

3000 Components on Each Reel

Dimension	Min	Max	Unit
A		178	mm
B	1.5		mm
C	12.80	13.50	mm
D	20.2		mm
N	50		mm
W ₁ (measured at hub)	8.4	9.9	mm
W ₂ (measured at hub)		14.4	mm
W ₃ (includes flange distortion at outer edge)	7.9	10.9	mm
Trailer	160		mm
Leader	390, of which minimum 160 mm of empty carrier tape sealed with cover tape		mm

ORDERING INFORMATION

Product Code	Product	Top Marking	Package	Comments
MAS9164AGA4-T	1.80 V Voltage Regulator IC	64A4	TSOT 5	Tape and Reel

For more voltage options contact Micro Analog Systems Oy.

LOCAL DISTRIBUTOR

MICRO ANALOG SYSTEMS OY CONTACTS

Micro Analog Systems Oy Kamreerintie 2, P.O.Box 51 FIN-02771 Espoo, FINLAND Http://www.mas-oy.com	Tel. (09) 80 521 Tel. Int. +358 9 80 521 Telefax +358 9 805 3213 E-mail: info@mas-oy.com
--	--

NOTICE

Micro Analog Systems Oy reserves the right to make changes to the products contained in this data sheet in order to improve the design or performance and to supply the best possible products. Micro Analog Systems Oy assumes no responsibility for the use of any circuits shown in this data sheet, conveys no license under any patent or other rights unless otherwise specified in this data sheet, and makes no claim that the circuits are free from patent infringement. Applications for any devices shown in this data sheet are for illustration only and Micro Analog Systems Oy makes no claim or warranty that such applications will be suitable for the use specified without further testing or modification.