



Octal, 13-Bit Voltage-Output DAC with Parallel Interface

MAX5839

General Description

The MAX5839 contains eight 13-bit, voltage-output digital-to-analog converters (DACs). On-chip precision output amplifiers provide the voltage outputs. The device operates from +14V/-9V supplies. Its bipolar output voltage swing ranges from +9V to -4V and is achieved with no external components. The MAX5839 has three pairs of differential reference inputs; two of these pairs are connected to two DACs each, and a third pair is connected to four DACs. The references are independently controlled, providing different full-scale output voltages to the respective DACs. The MAX5839 operates within the following voltage ranges: $V_{DD} = +7V$ to +14V, $V_{SS} = -5V$ to -9V, and $V_{CC} = +4.75V$ to +5.25V.

The MAX5839 features double-buffered interface logic with a 13-bit parallel data bus. Each DAC has an input latch and a DAC latch. Data in the DAC latch sets the output voltage. The eight input latches are addressed with three address lines. Data is loaded to the input latch with a single write instruction. An asynchronous load input (\overline{LD}) transfers data from the input latch to the DAC latch. The \overline{LD} input controls all DACs; therefore, all DACs can be updated simultaneously by asserting the \overline{LD} pin.

An asynchronous \overline{CLR} input sets the output of all eight DACs to the respective DUTGND input of the op amp. Note that \overline{CLR} is a CMOS input, which is powered by V_{DD} . All other logic inputs are TTL/CMOS compatible.

The "A" grade of the MAX5839 has a maximum INL of ± 2 LSBs, while the "B" grade has a maximum INL of ± 4 LSBs. Both grades are available in 44-pin MQFP packages.

Applications

- Industrial Process Controls
- Arbitrary Function Generators
- Avionics Equipment
- Minimum Component Count Analog Systems
- Digital Offset/Gain Adjustment
- SONET Applications
- Automatic Test Equipment (ATE)

Functional Diagram appears at end of data sheet.


Features

- ◆ Full 13-Bit Performance Without Adjustments
- ◆ 8 DACs in a Single Package
- ◆ Buffered Voltage Outputs
- ◆ Unipolar or Bipolar Voltage Swing to +9V and -4V
- ◆ 22 μ s Output Settling Time
- ◆ Drives up to 10,000pF Capacitive Load
- ◆ Low Output Glitch: 30mV
- ◆ Low Power Consumption: 10mA (typ)
- ◆ Small Package: 44-Pin MQFP
- ◆ Double-Buffered Digital Inputs
- ◆ Asynchronous Load Updates All DACs Simultaneously
- ◆ Asynchronous \overline{CLR} Forces All DACs to DUTGND Potential

Ordering Information

| PART | TEMP. RANGE | PIN-PACKAGE | INL (LSB) |
|-------------|----------------|-------------|-----------|
| MAX5839ACMH | 0°C to +70°C | 44 MQFP | ± 2 |
| MAX5839BCMH | 0°C to +70°C | 44 MQFP | ± 4 |
| MAX5839AEMH | -40°C to +85°C | 44 MQFP | ± 2 |
| MAX5839BEMH | -40°C to +85°C | 44 MQFP | ± 4 |

Pin Configuration

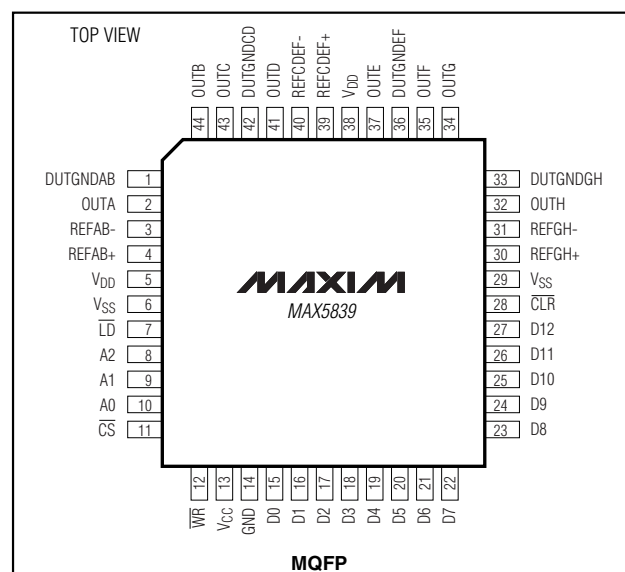

Maxim Integrated Products 1

For free samples & the latest literature: <http://www.maxim-ic.com>, or phone 1-800-998-8800.
For small orders, phone 1-800-835-8769.

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

ABSOLUTE MAXIMUM RATINGS

| | |
|--|--|
| V _{DD} to GND | -0.3V to +17V |
| V _{SS} to GND | -11V to +0.3V |
| V _{CC} to GND | -0.3V to +6V |
| A ₋ , D ₋ , WR, CS, LD, CLR to GND | +0.3V to (V _{CC} + 0.3V) |
| REF _{_____+} , REF _{_____} , DUTGND _{__} | (V _{SS} - 0.3V) to (V _{DD} + 0.3V) |
| OUT _{__} | V _{DD} to V _{SS} |
| Maximum Current into REF _{_____} , DUTGND _{__} | ±10mA |
| Maximum Current into Any Signal Pin | ±50mA |

| | |
|---|-----------------|
| OUT _{__} Short-Circuit Duration to V _{DD} , V _{SS} , and GND | 1sec |
| Continuous Power Dissipation (T _A = +70°C) | |
| 44-Pin MQFP (derate 11.1mW/°C above +70°C) | 870mW |
| Operating Temperature Ranges | |
| MAX5839_CMH | 0°C to +70°C |
| MAX5839_EMH | -40°C to +85°C |
| Junction Temperature | +150°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (soldering, 10s) | +300°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{DD} = +14V, V_{SS} = -9V, V_{CC} = +5V, V_{GND} = V_{DUTGND_{__}} = 0, V_{REF_{_____+}} = +4.500V, V_{REF_{_____}} = -2.000V, R_L = 10kΩ, C_L = 50pF, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--------|----------------------|------|---------------------|--------|---------------|
| STATIC PERFORMANCE (ANALOG SECTION) | | | | | | |
| Resolution | N | | 13 | | | Bits |
| Relative Accuracy | INL | MAX5839A | | | ±2 | LSB |
| | | MAX5839B | | | ±4 | |
| Differential Nonlinearity | DNL | Guaranteed monotonic | | | ±1 | LSB |
| Zero-Scale Error | ZSE | | | ±2 | ±4 | LSB |
| Full-Scale Error | FSE | | | ±4 | ±8 | LSB |
| Gain Error | | | | ±2 | ±5 | LSB |
| Gain Temperature Coefficient | | (Note 1) | | 0.15 | 20 | ppm FSR/°C |
| DC Crosstalk | | (Note 1) | | 14 | 75 | μV |
| REFERENCE INPUTS | | | | | | |
| Input Resistance | | | 1 | | | MΩ |
| Input Current | | | | ±1 | ±10 | μA |
| REF _{_____+} Input Range | | | 0.5 | | 4.5 | V |
| REF _{_____} Input Range | | | -2.0 | | -0.5 | V |
| (REF _{_____+}) - (REF _{_____}) Range | | | 2 | | 6.5 | V |
| ANALOG OUTPUTS | | | | | | |
| Maximum Output Voltage | | | 9 | V _{DD} - 2 | | V |
| Minimum Output Voltage | | | | V _{SS} + 2 | -4 | V |
| Resistive Load to GND | | | 5 | | | kΩ |
| Capacitive Load to GND | | (Note 2) | | | 10,000 | pF |
| DC Output Impedance | | (Note 1) | | | 0.5 | Ω |

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

MAX5839

ELECTRICAL CHARACTERISTICS (continued)

($V_{DD} = +14V$, $V_{SS} = -9V$, $V_{CC} = +5V$, $V_{GND} = V_{DUTGND} = 0$, $V_{REF_+} = +4.500V$, $V_{REF_ -} = -2.000V$, $R_L = 10k\Omega$, $C_L = 50pF$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|----------|--------------------------|------|-----|------|------------|
| DUTGND_ CHARACTERISTICS | | | | | | |
| Input Impedance per DAC | | | 40 | 84 | | k Ω |
| Input Current per DAC | | (Note 1) | -165 | | 100 | μA |
| Input Range | | | -2 | | 2 | V |
| DIGITAL INPUTS | | | | | | |
| Input Voltage High | V_{IH} | | 2.4 | | | V |
| Input Voltage Low | V_{IL} | | | | 0.8 | V |
| Input Capacitance | C_{IN} | (Note 1) | | | 10 | pF |
| Input Current | I_{IN} | $V_{IN} = 0$ or V_{CC} | -1 | | 1 | μA |
| POWER SUPPLIES | | | | | | |
| V_{DD} Analog Power-Supply Range | V_{DD} | | 7 | | 14 | V |
| V_{SS} Analog Power-Supply Range | V_{SS} | | -9 | | -5 | V |
| Digital Power Supply | V_{CC} | | 4.75 | 5 | 5.25 | V |
| Positive Supply Current | I_{DD} | $R_L = \infty$ | | 10 | 13 | mA |
| Negative Supply Current | I_{SS} | $R_L = \infty$ | | 9 | 12 | mA |
| Digital Supply Current | I_{CC} | (Note 3) | | | 0.5 | mA |
| | | (Note 4) | | | 5 | mA |
| PSRR, $\Delta V_{OUT} / \Delta V_{DD}$ | | $V_{DD} = 14V \pm 5\%$ | | 94 | | dB |
| PSRR, $\Delta V_{OUT} / \Delta V_{SS}$ | | $V_{SS} = -9V \pm 5\%$ | | 98 | | dB |

INTERFACE TIMING CHARACTERISTICS

($V_{DD} = +14V$, $V_{SS} = -9V$, $V_{CC} = +5V$, $V_{GND} = V_{DUTGND} = 0$, $V_{REF_+} = +4.500V$, $V_{REF_ -} = -2.000V$, Figure 2, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|--------|------------|-----|-----|-----|-------|
| \overline{CS} Pulse Width Low | t_1 | | 50 | | | ns |
| \overline{WR} Pulse Width Low | t_2 | | 50 | | | ns |
| \overline{LD} Pulse Width Low | t_3 | | 50 | | | ns |
| \overline{CS} Low to \overline{WR} Low | t_4 | | 0 | | | ns |
| \overline{CS} High to \overline{WR} High | t_5 | | 0 | | | ns |
| Data Valid to \overline{WR} Setup | t_6 | | 50 | | | ns |
| Data Valid to \overline{WR} Hold | t_7 | | 0 | | | ns |
| Address Valid to \overline{WR} Setup | t_8 | | 15 | | | ns |
| Address Valid to \overline{WR} Hold | t_9 | | 0 | | | ns |

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

DYNAMIC CHARACTERISTICS

($V_{DD} = +14V$, $V_{SS} = -9V$, $V_{CC} = +5V$, $V_{GND} = V_{DUTGND} = 0$, $V_{REF_+} = +4.500V$, $V_{REF_ -} = -2.000V$, $R_L = 10k\Omega$, $C_L = 50pF$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|----------------------------------|--------|--------------------------------|-----|-----|-----|-----------------|
| Output Settling Time | | To $\pm 1/2$ LSB of full scale | | 22 | | μs |
| Output Slew Rate | | | | 1 | | V/ μs |
| Digital Feedthrough | | (Note 5) | | 3 | | nVs |
| Digital Crosstalk | | (Note 6) | | 3 | | nVs |
| Digital-to-Analog Glitch Impulse | | | | 120 | | nVs |
| DAC-to-DAC Crosstalk | | | | 3 | | nVs |
| Channel-to-Channel Isolation | | | | 100 | | dB |
| Output Noise Spectral Density | | At $f = 1kHz$ | | 120 | | nV/ \sqrt{Hz} |

Note 1: Guaranteed by design. Not production tested.

Note 2: Guaranteed by design when 220Ω resistor is in series with $C_L = 10,000pF$.

Note 3: All digital inputs (D_{-} , A_{-} , \overline{WR} , \overline{CS} , \overline{LD} , and \overline{CLR}) at GND or V_{CC} potential.




Note 4: All digital inputs (D_{-} , A_{-} , \overline{WR} , \overline{CS} , \overline{LD} , and \overline{CLR}) at $+0.8V$ or $+2.4V$.

Note 5: All data inputs (D_0 to D_{12}) transition from GND to V_{CC} , with $\overline{WR} = V_{CC}$.

Note 6: All digital inputs (D_{-} , A_{-} , \overline{WR} , \overline{CS} , \overline{LD} , and \overline{CLR}) at $+0.8V$ or $+2.4V$.

Typical Operating Characteristics

($V_{DD} = +14V$, $V_{SS} = -9V$, $V_{CC} = +5V$, $V_{GND} = V_{DUTGND} = 0$, $V_{REF_+} = +4.500V$, $V_{REF_ -} = -2.000V$, $T_A = +25^\circ C$, unless otherwise noted.)

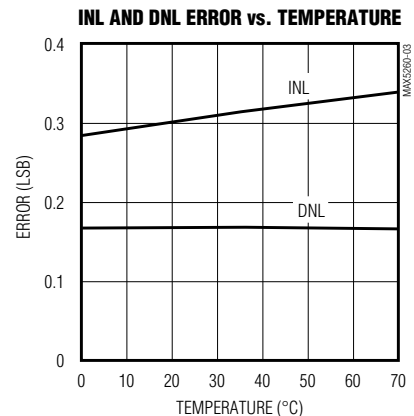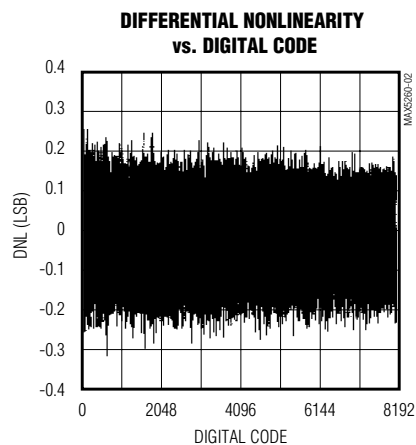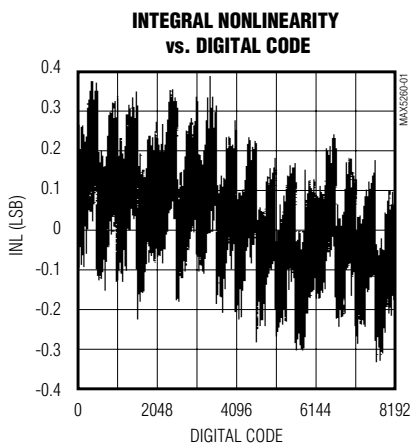


Octal, 13-Bit Voltage-Output DAC with Parallel Interface

MAX5839


Typical Operating Characteristics (continued)

($V_{DD} = +14V$, $V_{SS} = -9V$, $V_{CC} = +5V$, $V_{GND} = V_{DUTGND_} = 0$, $V_{REF_+} = +4.500V$, $V_{REF_ -} = -2.000V$, $T_A = +25^\circ C$, unless otherwise noted.)


ZERO-SCALE AND FULL-SCALE ERROR vs. TEMPERATURE

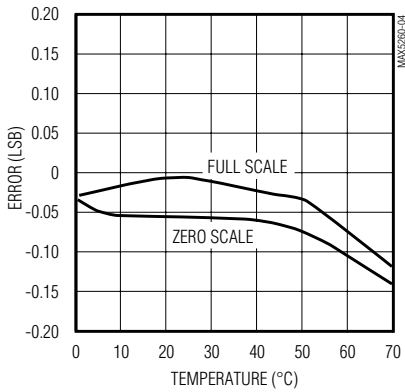


I_{DD} AND I_{SS} vs. TEMPERATURE (UNLOADED)

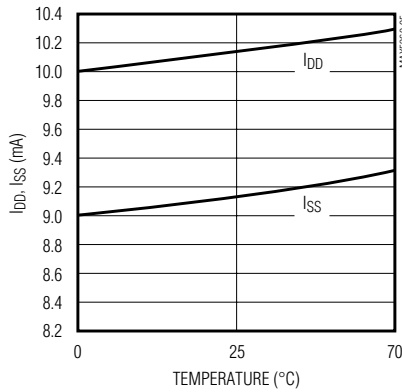


DIGITAL SUPPLY CURRENT vs. TEMPERATURE

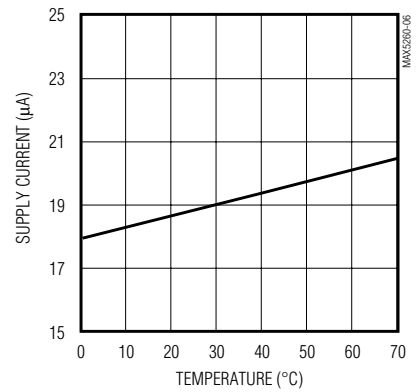


REFERENCE INPUT FREQUENCY RESPONSE

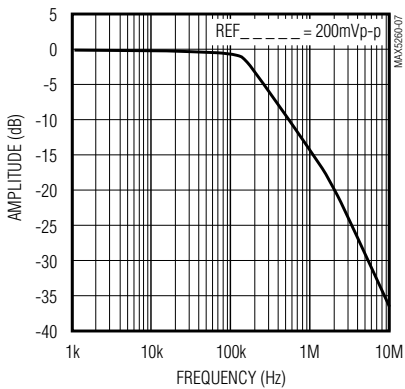


SETTLING TIME vs. CAPACITIVE LOAD

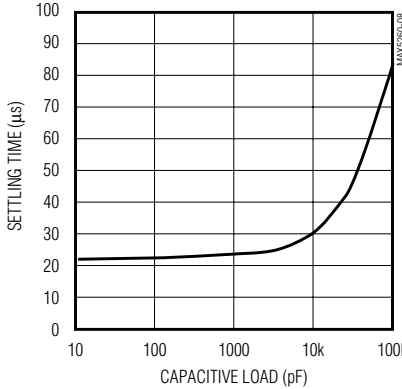


LARGE-SIGNAL STEP RESPONSE

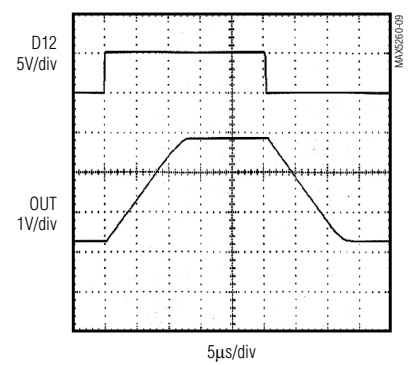


POSITIVE SETTLING TIME

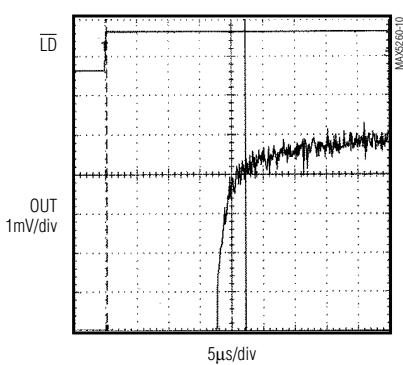

NEGATIVE SETTLING TIME

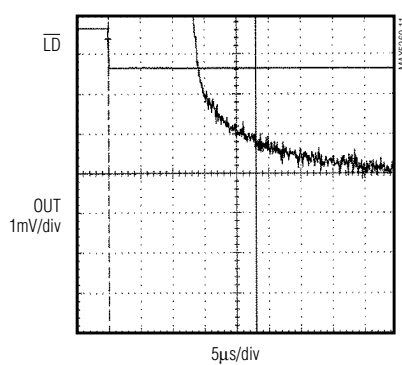

NOISE VOLTAGE DENSITY vs. FREQUENCY

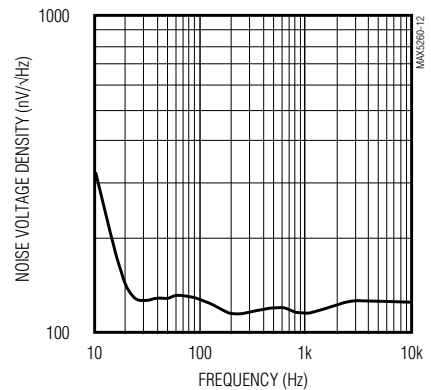


Octal, 13-Bit Voltage-Output DAC with Parallel Interface


Typical Operating Characteristics (continued)

($V_{DD} = +14V$, $V_{SS} = -9V$, $V_{CC} = +5V$, $V_{GND} = V_{DUTGND} = 0$, $V_{REF_+} = +4.500V$, $V_{REF_ -} = -2.000V$, $T_A = +25^\circ C$, unless otherwise noted.)


MAJOR CARRY GLITCH IMPULSE (0xFFFF-0x10000)

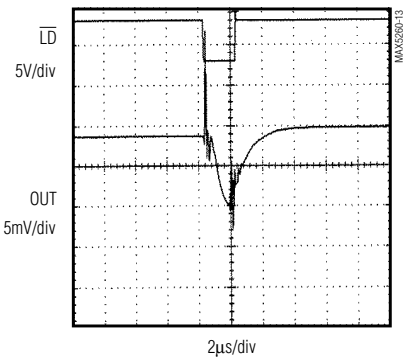


MAJOR CARRY GLITCH IMPULSE (0x1000-0xFFFF)

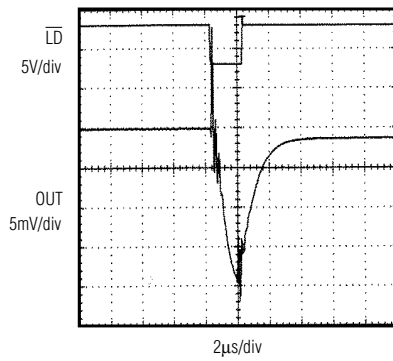


GAIN ERROR vs. V_{REF} ($V_{REF+} - V_{REF-}$)

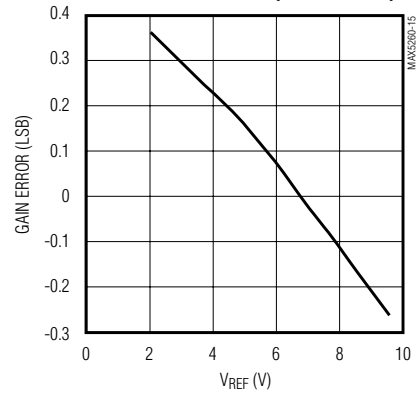


DIFFERENTIAL NONLINEARITY (MAX, MIN) vs. V_{REF} ($V_{REF+} - V_{REF-}$)

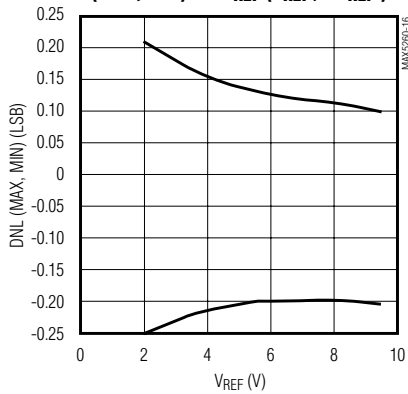


INTEGRAL NONLINEARITY (MAX, MIN) vs. V_{REF} ($V_{REF+} - V_{REF-}$)

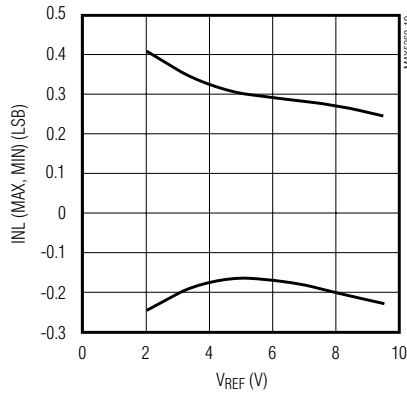

FULL-SCALE ERROR vs. V_{REF} ($V_{REF+} - V_{REF-}$)

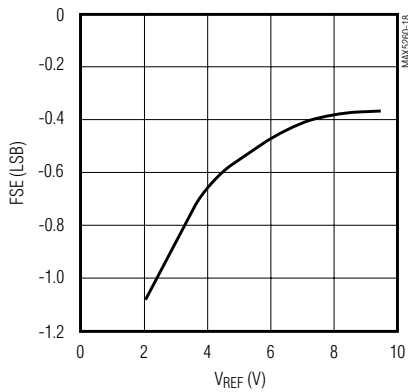

ZERO-SCALE ERROR vs. V_{REF} ($V_{REF+} - V_{REF-}$)

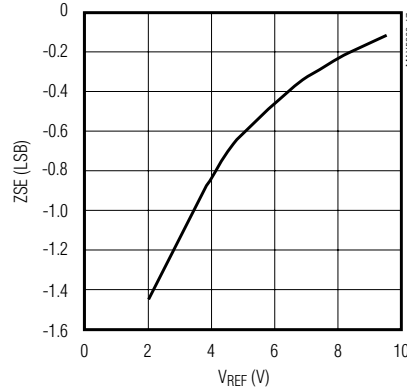

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

Pin Description

MAX5839

| PIN | NAME | FUNCTION |
|-------|-------------------------|--|
| 1 | DUTGNDAB | Device Sense Ground Input for OUTA and OUTB. In normal operation, OUTA and OUTB are referenced to DUTGNDAB. When $\overline{\text{CLR}}$ is low, OUTA and OUTB are forced to the potential on DUTGNDAB. |
| 2 | OUTA | DAC A Buffered Output Voltage |
| 3 | REFAB- | Negative Reference Input for DACs A and B |
| 4 | REFAB+ | Positive Reference Input for DACs A and B |
| 5, 38 | VDD | Positive Analog Power Supply. Normally set to +14V. Connect both pins to the supply voltage. See <i>Grounding and Bypassing</i> section for bypass requirements. |
| 6, 29 | VSS | Negative Analog Power Supply. Normally set to -9V. Connect both pins to the supply voltage. See <i>Grounding and Bypassing</i> section for bypass requirements. |
| 7 | $\overline{\text{LD}}$ | Load Input. Drive this asynchronous input low to transfer the contents of the input latches to their respective DAC latches. DAC latches are transparent when $\overline{\text{LD}}$ is low and latched when $\overline{\text{LD}}$ is high. |
| 8 | A2 | Address Bit 2 (MSB) |
| 9 | A1 | Address Bit 1 |
| 10 | A0 | Address Bit 0 (LSB) |
| 11 | $\overline{\text{CS}}$ | Chip Select. Active-low input. |
| 12 | $\overline{\text{WR}}$ | Write Input. Active-low strobe for conventional memory write sequence. Input data latches are transparent when $\overline{\text{WR}}$ and $\overline{\text{CS}}$ are both low. $\overline{\text{WR}}$ latches data into the DAC input latch selected by A2–A0 on the rising edge of $\overline{\text{CS}}$. |
| 13 | VCC | Digital Power Supply. Normally set to +5V. See <i>Grounding and Bypassing</i> section for bypass requirements. |
| 14 | GND | Ground |
| 15–27 | D0–D12 | Data Bits 0–12. Offset binary coding. |
| 28 | $\overline{\text{CLR}}$ | Clear Input. Drive $\overline{\text{CLR}}$ low to force all DAC outputs to the voltage on their respective DUTGND_ __. Does not affect the status of internal registers. All DACs return to their previous levels when $\overline{\text{CLR}}$ goes high. |
| 30 | REFGH+ | Positive Reference Input for DACs G and H |
| 31 | REFGH- | Negative Reference Input for DACs G and H |

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

Pin Description (continued)

| PIN | NAME | FUNCTION |
|-----|----------|---|
| 32 | OUTH | DAC H Buffered Output Voltage |
| 33 | DUTGNDGH | Device Sense Ground Input for OUTG and OUTH. In normal operation, OUTG and OUTH are referenced to DUTGNDGH. When $\overline{\text{CLR}}$ is low, OUTG and OUTH are forced to the potential on DUTGNDGH. |
| 34 | OUTG | DAC G Buffered Output Voltage |
| 35 | OUTF | DAC F Buffered Output Voltage |
| 36 | DUTGNDEF | Device Sense Ground Input for OUTE and OUTF. In normal operation, OUTE and OUTF are referenced to DUTGNDEF. When $\overline{\text{CLR}}$ is low, OUTE and OUTF are forced to the potential on DUTGNDEF. |
| 37 | OUTE | DAC E Buffered Output Voltage |
| 39 | REFCDEF+ | Positive Reference Input for DACs C, D, E, and F |
| 40 | REFCDEF- | Negative Reference Input for DACs C, D, E, and F |
| 41 | OUTD | DAC D Buffered Output Voltage |
| 42 | DUTGNDCD | Device Sense Ground Input for OUTC and OUTD. In normal operation, OUTC and OUTD are referenced to DUTGNDCD. When $\overline{\text{CLR}}$ is low, OUTC and OUTD are forced to the potential on DUTGNDCD. |
| 43 | OUTC | DAC C Buffered Output Voltage |
| 44 | OUTB | DAC B Buffered Output Voltage |

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

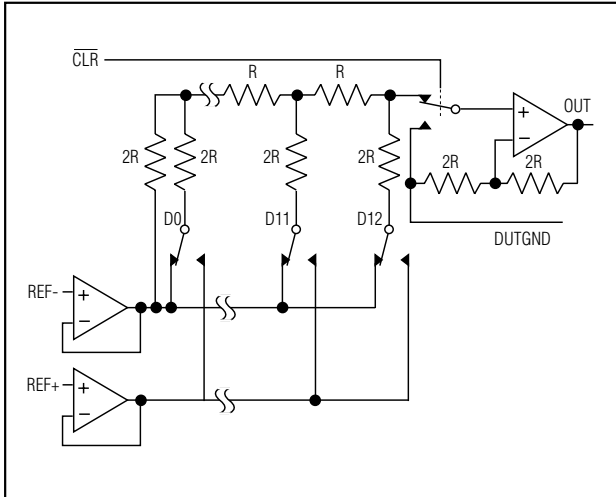


Figure 1. DAC Simplified Circuit

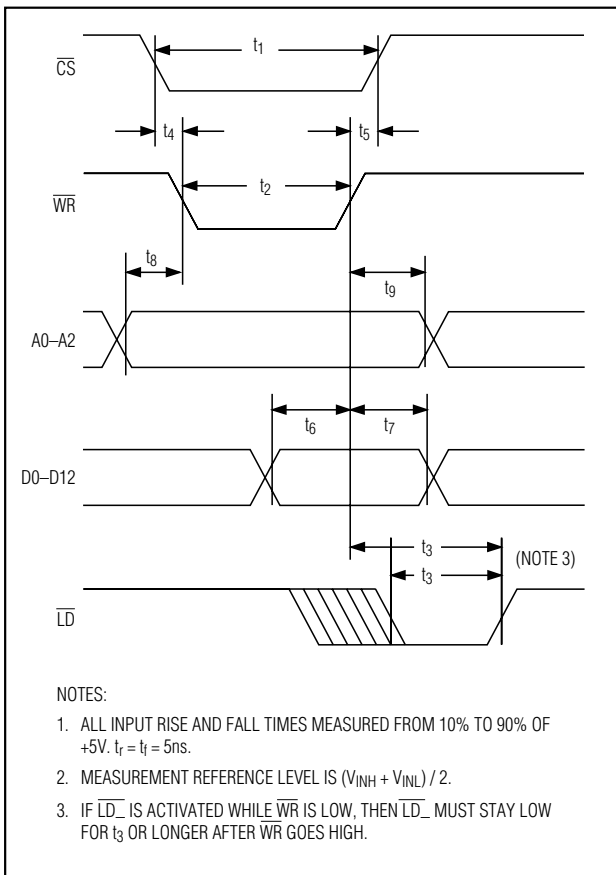


Figure 2. Digital Timing Diagram

Detailed Description

Analog Section

The MAX5839 contains eight 13-bit voltage-output DACs. These DACs are “inverted” R-2R ladder networks that convert 13-bit digital inputs into equivalent analog output voltages, in proportion to the applied reference voltages (Figure 1). The MAX5839 has three positive reference inputs (REF_ ___+) and three negative reference inputs (REF_ ___-). The difference from REF_ ___+ to REF_ ___-, multiplied by two, sets the DAC output span.

In addition to the differential reference inputs, the MAX5839 has four analog-ground input pins (DUTGND_ _). When \overline{CLR} is high (unasserted), the voltage on DUTGND_ _ offsets the DAC output voltage range. If \overline{CLR} is asserted, the output amplifier is forced to the voltage present on DUTGND_ _.

Reference and DUTGND Inputs

All of the MAX5839’s reference inputs are buffered with precision amplifiers. This allows the flexibility of using resistive dividers to set the reference voltages. Because of the relatively high multiplying bandwidth of the reference input (188kHz), any signal present on the reference pin within this bandwidth is replicated on the DAC output.

The DUTGND pins of the MAX5839 are connected to the negative source resistor (nominally 84k Ω) of the output amplifier. The DUTGND pins are typically connected directly to analog ground. Each of these pins has an input current that varies with the DAC digital code. If the DUTGND pins are driven by external circuitry, budget $\pm 200\mu\text{A}$ per DAC for load current.

Output Buffer Amplifiers

The MAX5839’s voltage outputs are internally buffered by precision gain-of-two amplifiers with a typical slew rate of 1V/ μs . With a full-scale transition at its output, the typical settling time to $\pm 1/2\text{LSB}$ is 22 μs . This settling time does not significantly vary with capacitive loads less than 10,000pF.

Output Deglitching Circuit

The MAX5839’s internal connection from the DAC ladder to the output amplifier contains special deglitch circuitry. This glitch/deglitch circuitry is enabled on the falling edge of \overline{LD} to remove the glitch from the R-2R DAC. This enables the MAX5839 to exhibit a fraction of the glitch impulse energy of parts without the deglitching circuit.

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

Digital Inputs and Interface Logic

All digital inputs are compatible with both TTL and CMOS logic. The MAX5839 interfaces with microprocessors using a data bus at least 13 bits wide. The interface is double buffered, allowing simultaneous updating of all DACs. There are two latches for each DAC (see *Functional Diagram*): an input latch that receives data from the data bus, and a DAC latch that receives data from the input latch. Address lines A0, A1, and A2 select which DAC's input latch receives data from the data bus, as shown in Table 1. Both the input latches and the DAC latches are transparent when \overline{CS} , \overline{WR} , and \overline{LD} are all low. Any change of D0–D12 during this condition appears at the output instantly. Transfer data from the input latches to the DAC latches by asserting the asynchronous \overline{LD} signal. Each DAC's analog output reflects the data held in its DAC latch. All control inputs are level triggered. Table 2 is an interface truth table.

Table 1. MAX5839 DAC Addressing

| A2 | A1 | A0 | FUNCTION |
|----|----|----|-------------------|
| 0 | 0 | 0 | DAC A input latch |
| 0 | 0 | 1 | DAC B input latch |
| 0 | 1 | 0 | DAC C input latch |
| 0 | 1 | 1 | DAC D input latch |
| 1 | 0 | 0 | DAC E input latch |
| 1 | 0 | 1 | DAC F input latch |
| 1 | 1 | 0 | DAC G input latch |
| 1 | 1 | 1 | DAC H input latch |

Table 2. Interface Truth Table

| CLR | \overline{LD} | \overline{WR} | \overline{CS} | FUNCTION |
|-----|-----------------|-----------------|-----------------|---|
| X | X | 0 | 0 | Input register transparent |
| X | X | X | 1 | Input register latched |
| X | X | 1 | X | Input register latched |
| X | 0 | X | X | DAC register transparent |
| X | 1 | X | X | DAC register latched |
| 0 | X | X | X | Outputs of DACs at DUTGND_ _ |
| 1 | 1 | X | X | Outputs of DACs set to voltage defined by the DAC register, the references, and the corresponding DUTGND_ _ |

X = Don't care

Input Write Cycle

Data can be latched or transferred directly to the DAC. \overline{CS} and \overline{WR} control the input latch, and \overline{LD} transfers information from the input latch to the DAC latch. The input latch is transparent when \overline{CS} and \overline{WR} are low, and the DAC latch is transparent when \overline{LD} is low. The address lines (A0, A1, A2) must be valid for the duration that \overline{CS} and \overline{WR} are low (Figure 1), to prevent data from being inadvertently written to the wrong DAC. Data is latched within the input latch when either \overline{CS} or \overline{WR} is high.

Loading the DACs

Taking \overline{LD} high latches data into the DAC latches. If \overline{LD} is brought low when \overline{WR} and \overline{CS} are low, the DAC addressed by A0, A1, and A2 is directly controlled by the data on D0–D12. This allows the maximum digital update rate; however, it is sensitive to any glitches or skew in the input data stream.

Asynchronous Clear

The MAX5839 has an asynchronous clear pin (CLR) that, when asserted, sets all DAC outputs to the voltage present on their respective DUTGND pins. Deassert CLR to return the DAC output to its previous voltage. Note that CLR does not clear any of the internal digital registers.

Applications Information

Multiplying Operation

The MAX5839 can be used for multiplying applications. Its reference accepts both DC and AC signals. Since the reference inputs are unipolar, multiplying operation is limited to two quadrants. See the graphs in the *Typical Operating Characteristics* for dynamic performance of the DACs and output buffers.

Digital Code and Analog Output Voltage

The MAX5839 uses offset binary coding. A 13-bit two's complement code is converted to a 13-bit offset binary code by adding $2^{12} = 4096$.

Output Voltage Range

For typical operation, connect DUTGND to signal ground, V_{REF+} to +4.5V, and V_{REF-} to -2.0V. Table 3 shows the relationship between digital code and output voltage.

The DAC digital code controls each leg of the 13-bit R-2R ladder. A code of 0x0 connects all legs of the ladder to REF-, corresponding to a DAC output voltage (V_{DAC}) equal to REF-. A code of 0x1FFF connects all legs of the ladder to REF+, corresponding to a V_{DAC} approximately equal to REF+.

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

Table 3. Analog Voltage vs. Digital Code

| INPUT CODE | OUTPUT VOLTAGE (V) |
|------------------|--------------------|
| 1 1111 1111 1111 | +8.998413 |
| 1 0000 0000 0000 | +4.500 |
| 0 1001 1101 1001 | +600μ |
| 0 0000 0000 0001 | -3.998586 |
| 0 0000 0000 0000 | -4.000 |

Note: Output voltage is based on REF+ = +4.5V, REF- = -2.0V, and DUTGND = 0.

The output amplifier multiplies V_{DAC} by 2, yielding an output voltage range of 2 · REF- to 2 · REF+ (Figure 1). Further manipulation of the output voltage span is accomplished by offsetting DUTGND. The output voltage of the MAX5839 is described by the following equation:

$$V_{OUT} = 2 \left[\left(V_{REF+} - V_{REF-} \right) \frac{DATA}{2^{13}} + V_{REF-} \right] - V_{OUTGND}$$

where DATA is the numeric value of the DAC's binary input code, and DATA ranges from 0 (2⁰) to 8191 (2¹³ - 1). The resolution of the MAX5839, defined as 1LSB, is described by the following equation:

$$LSB = \frac{2 (REF+ - REF-)}{2^{13}}$$

Reference Selection

Because the MAX5839 has precision buffers on its reference inputs, the requirements for interfacing to these inputs are minimal. Select a low-drift, low-noise reference within the recommended REF+ and REF- voltage ranges. The MAX5839 does not require bypass capacitors on its reference inputs. Add capacitors only if the reference voltage source requires them to meet system specifications.

Minimizing Output Glitch

The MAX5839's internal deglitch circuitry is enabled on the falling edge of \overline{LD} . Therefore, to achieve optimum performance, drive \overline{LD} low after the inputs are either latched or steady state. This is best accomplished by having the falling edge of \overline{LD} occur at least 50ns after the rising edge of \overline{CS} .

Power Supplies, Grounding, and Bypassing

For optimum performance, use a multilayer PC board with an unbroken analog ground. For normal operation, connect the four DUTGND pins directly to the ground plane. Avoid sharing the connections of these sensitive pins with other ground traces.

As with any sensitive data acquisition system, connect the digital and analog ground planes together at a single point, preferably directly underneath the MAX5839. Avoid routing digital signals underneath the MAX5839 to minimize their coupling into the IC.

For normal operation, bypass V_{DD} and V_{SS} with 0.1μF ceramic chip capacitors to the analog ground plane. To enhance transient response and capacitive drive capability, add 10μF tantalum capacitors in parallel with the ceramic capacitors. Note, however, that the MAX5839 does not require the additional capacitance for stability. Bypass V_{CC} with a 0.1μF ceramic chip capacitor to the digital ground plane.

Power-Supply Sequencing

To guarantee proper operation of the MAX5839, ensure that power is applied to V_{DD} before V_{SS} and V_{CC}. Also ensure that V_{SS} is never more than 300mV above ground. To prevent this situation, connect a Schottky diode between V_{SS} and the analog ground plane, as shown in Figure 3. Do not power up the logic input pins before establishing the supply voltages. If this is not possible and the digital lines can drive more than 10mA, place current-limiting resistors (e.g., 470Ω) in series with the logic pins.

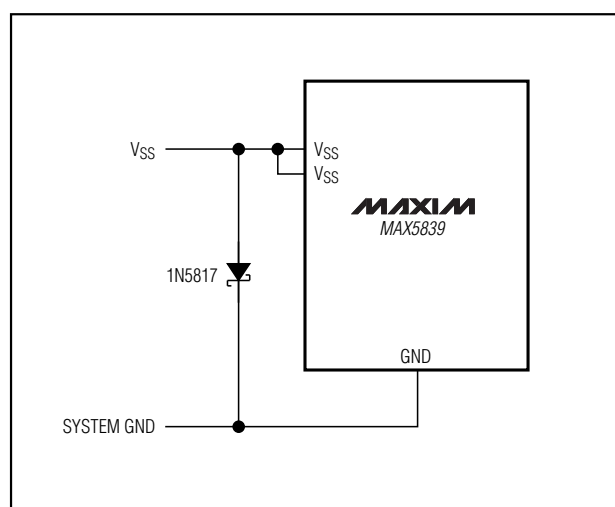


Figure 3. Schottky Diode Between V_{SS} and GND

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

Driving Capacitive Loads

The MAX5839 typically drives capacitive loads up to 0.01 μ F without a series output resistor. However, whenever driving high capacitive loads, it is prudent to use a 220 Ω series resistor between the MAX5839 output and the capacitive load.


Chip Information

TRANSISTOR COUNT: 10,973

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

Functional Diagram

MAX5839

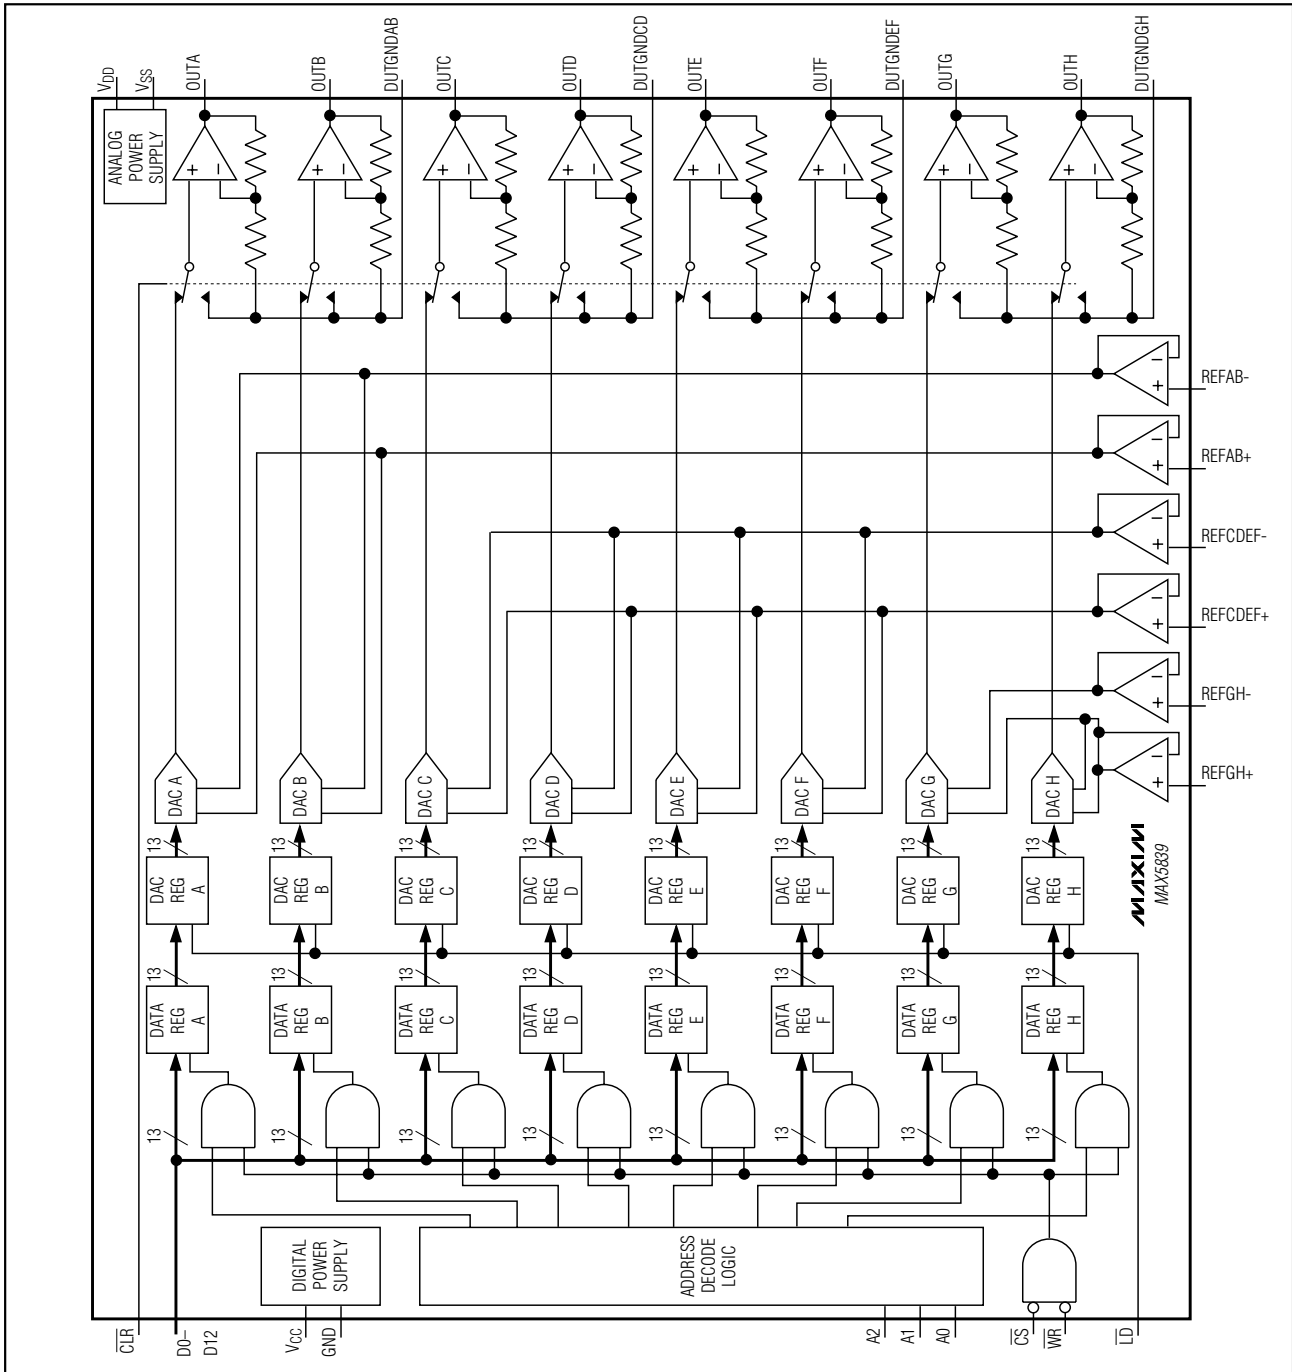

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

Package Information

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|--------|--------|-------|
| | MIN | MAX | MIN | MAX |
| A | 2.032 | 2.388 | 0.080 | 0.094 |
| A1 | 0.102 | 0.254 | 0.004 | 0.010 |
| A2 | 1.930 | 2.134 | 0.076 | 0.084 |
| b | 0.305 | 0.457 | 0.012 | 0.018 |
| c | 0.102 | 0.254 | 0.004 | 0.010 |
| D | 12.954 | 13.462 | 0.510 | 0.530 |
| D1 | 9.906 | 10.109 | 0.390 | 0.398 |
| D3 | 8.000 | REF | 0.315 | REF |
| E | 12.954 | 13.462 | 0.510 | 0.530 |
| E1 | 9.906 | 10.109 | 0.390 | 0.398 |
| E3 | 8.000 | REF | 0.315 | REF |
| e | 0.800 | REF | 0.0315 | REF |
| L | 0.635 | 0.940 | 0.025 | 0.037 |
| α | *0 | *10 | *0 | *10 |

SEE DETAIL "A"

DETAIL "A"

NOTES:

1. D1&E1 DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .254mm(.010").
3. CONTROLLING DIMENSION: MILLIMETER.
4. MEETS JEDEC MO-108-AA-2.

| | | | |
|----------------------------|----------------------|-----|-----|
| MAXIM | | | |
| PROPRIETARY INFORMATION | | | |
| TITLE: | | | |
| PACKAGE OUTLINE, MQFP, 44L | | | |
| APPROVAL | DOCUMENT CONTROL NO. | REV | 1/1 |
| | 21-0826 | C | |

MQFP44.EPS

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

NOTES

MAX5839

Octal, 13-Bit Voltage-Output DAC with Parallel Interface

NOTES

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

16 _____ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**