



Micro Commercial Components  
 21201 Itasca Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# SBL1025L THRU SBL1030L

## 10 Amp Schottky Barrier Rectifier 25 to 30 Volts

### Features


- Low Power Loss
- High Efficiency
- Low Forward Voltage
- High surge capacity
- High Current Capability

### Maximum Ratings

- Operating Junction Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C

Microsemi Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SBL1025L	-----	25V	17.5V	25V
SBL1030L	-----	30V	21V	30V

### TO-220AC

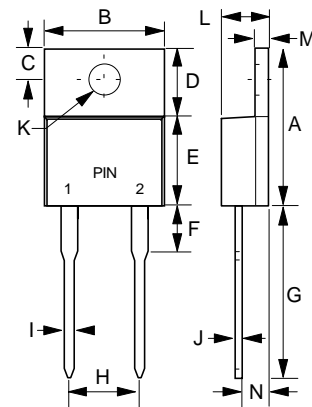

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	10 A	$T_C = 100^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	200A	8.3ms, half sine
Maximum Forward Voltage  1025L-1030L	$V_F$	.45	$I_F=10\text{ A } T_J= 25^\circ\text{C}$
		.35	$I_F=10\text{ A } T_J= 125^\circ\text{C}$
		.55	$I_F=20\text{ A } T_J= 25^\circ\text{C}$
		.50	$I_F=20\text{ A } T_J= 125^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	$I_R$	0.8mA 260mA	$T_J= 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$

DIM	DIMENSIONS				NOTE
	INCHES		MM		
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.100	.135	2.54	3.43	
D	.230	.270	5.84	6.86	
E	.325	.365	8.26	9.28	
F	-----	.250	-----	6.35	
G	.500	.580	12.70	14.73	
H	.190	.210	4.83	5.33	
I	.020	.045	0.51	1.14	
J	.012	.025	0.30	0.64	
K	.139	.161	3.53	4.09	∅
L	.140	.190	3.56	4.83	
M	.045	.055	1.14	1.40	
N	.080	.115	2.03	2.92	

