


MICRO ELECTRONICS

ULTRA HIGH BRIGHTNESS RED LED LAMP

DESCRIPTION

MSB27TA-B is an ultra high brightness output red AlGaInP LED lamp encapsulated in a 2.78mm diameter clear transparent lens. 3 brightness grouping is provided for customer's selection.

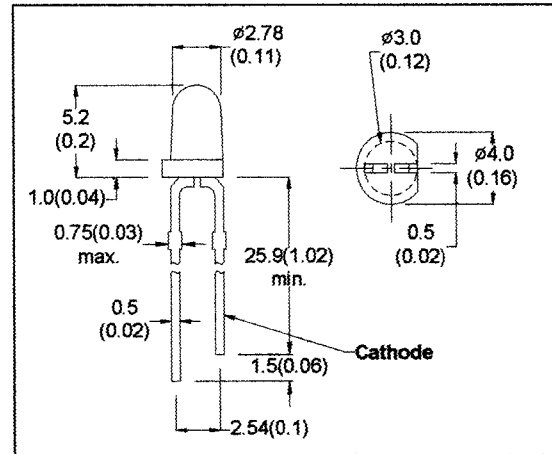

- All Dimension in mm (inch)
- No Scale
- Tol : +/- 0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @Ta=25°C	100mW
Forward Current, DC (IF)	40mA
Reverse Voltage	5V
Operating & Storage Temperature Range	-55 to +100°C
Lead Soldering Temperature (1/16" from body)	260°C for 5 sec.

ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF		1.9	2.4	V	IF=20mA
Reverse Breakdown Voltage	BVR	5			V	IR=100 μ A
Luminous Intensity	IV				mcd	IF=20mA
	-3B	900	1200		mcd	IF=20mA
	-4B	1200	1500		mcd	IF=20mA
	-5B	1500	2000		mcd	IF=20mA
Peak Wavelength	λ_p		645		nm	IF=20mA
Spectral Line Half Width	$\Delta\lambda$		22		nm	IF=20mA
Viewing Anmle	2θ 1/2		12		degree	IF=20mA

MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Aug-99