

FK16KM-6

HIGH-SPEED SWITCHING USE


FK16KM-6



- V_{DSS} 300V
- $r_{DS(ON)}$ (MAX) 0.41Ω
- I_D 16A
- V_{iso} 2000V
- Integrated Fast Recovery Diode (MAX.) 150ns

OUTLINE DRAWING

Dimensions in mm

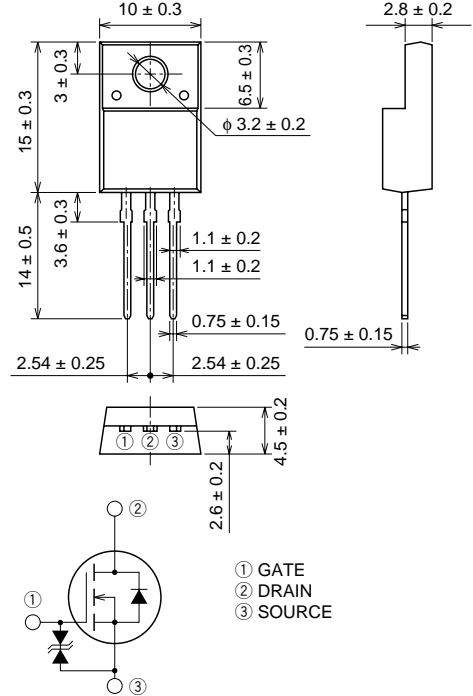

TO-220FN

APPLICATION

Servo motor drive, Robot, UPS, Inverter Fluorecent lamp, etc.



MAXIMUM RATINGS (Tc = 25°C)

| Symbol | Parameter | Conditions | Ratings | Unit |
|-----------|---------------------------|----------------------------------|------------|------|
| V_{DSS} | Drain-source voltage | $V_{GS} = 0V$ | 300 | V |
| V_{GSS} | Gate-source voltage | $V_{DS} = 0V$ | ± 30 | V |
| I_D | Drain current | | 16 | A |
| I_{DM} | Drain current (Pulsed) | | 48 | A |
| I_S | Source current | | 16 | A |
| I_{SM} | Source current (Pulsed) | | 48 | A |
| P_D | Maximum power dissipation | | 35 | W |
| T_{ch} | Channel temperature | | -55 ~ +150 | °C |
| T_{stg} | Storage temperature | | -55 ~ +150 | °C |
| V_{iso} | Isolation voltage | AC for 1minute, Terminal to case | 2000 | Vrms |
| — | Weight | Typical value | 2.0 | g |


ELECTRICAL CHARACTERISTICS (T_{ch} = 25°C)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------------------|----------------------------------|--|--------|------|------|------|
| | | | Min. | Typ. | Max. | |
| V (BR) DSS | Drain-source breakdown voltage | I _D = 1mA, V _{GS} = 0V | 300 | — | — | V |
| V (BR) GSS | Gate-source breakdown voltage | I _G = ±100μA, V _{DS} = 0V | ±30 | — | — | V |
| I _{GSS} | Gate-source leakage current | V _{GS} = ±25V, V _{DS} = 0V | — | — | ±10 | μA |
| I _{DSS} | Drain-source leakage current | V _{DS} = 300V, V _{GS} = 0V | — | — | 1 | mA |
| V _{GS} (th) | Gate-source threshold voltage | I _D = 1mA, V _{DS} = 10V | 2 | 3 | 4 | V |
| r _{DS} (ON) | Drain-source on-state resistance | I _D = 8A, V _{GS} = 10V | — | 0.31 | 0.41 | Ω |
| V _{DS} (ON) | Drain-source on-state voltage | I _D = 8A, V _{GS} = 10V | — | 2.48 | 3.28 | V |
| y _{fs} | Forward transfer admittance | I _D = 8A, V _{DS} = 10V | 6.5 | 10.0 | — | S |
| C _{iss} | Input capacitance | V _{DS} = 25V, V _{GS} = 0V, f = 1MHz | — | 1050 | — | pF |
| C _{oss} | Output capacitance | | — | 220 | — | pF |
| C _{rss} | Reverse transfer capacitance | | — | 45 | — | pF |
| t _d (on) | Turn-on delay time | V _{DD} = 150V, I _D = 8A, V _{GS} = 10V, R _{GEN} = R _{GS} = 50Ω | — | 20 | — | ns |
| t _r | Rise time | | — | 40 | — | ns |
| t _d (off) | Turn-off delay time | | — | 110 | — | ns |
| t _f | Fall time | | — | 50 | — | ns |
| V _{SD} | Source-drain voltage | I _S = 8A, V _{GS} = 0V | — | 1.5 | 2.0 | V |
| R _{th} (ch-c) | Thermal resistance | Channel to case | — | — | 3.57 | °C/W |
| t _{rr} | Reverse recovery time | I _S = 16A, di _s /dt = -100A/μs | — | — | 150 | ns |


PERFORMANCE CURVES

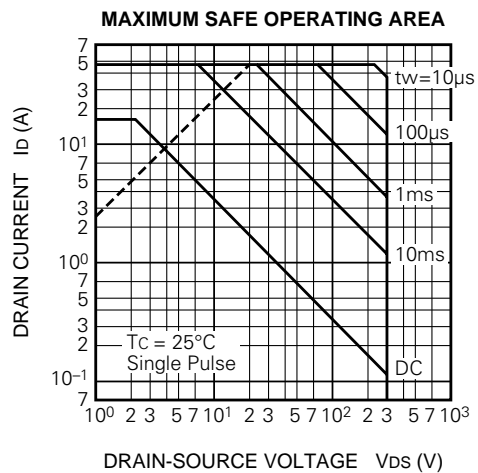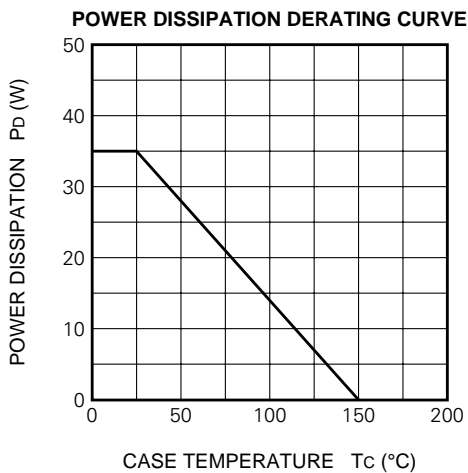


OUTPUT CHARACTERISTICS (TYPICAL)

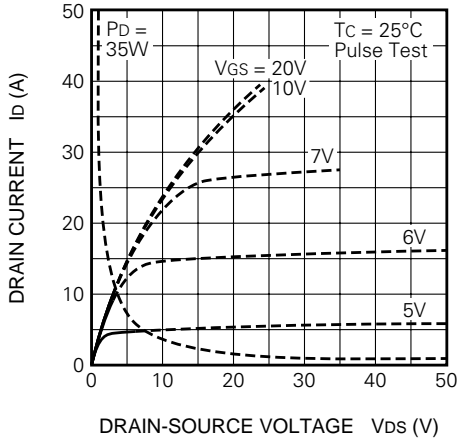


OUTPUT CHARACTERISTICS (TYPICAL)

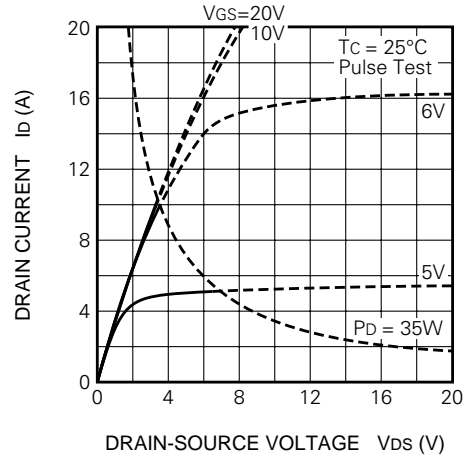


ON-STATE VOLTAGE VS. GATE-SOURCE VOLTAGE (TYPICAL)

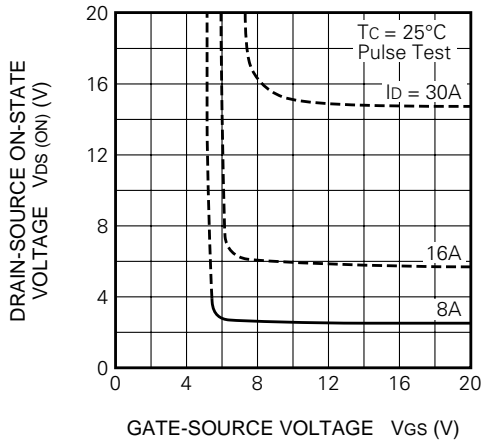


ON-STATE RESISTANCE VS. DRAIN CURRENT (TYPICAL)

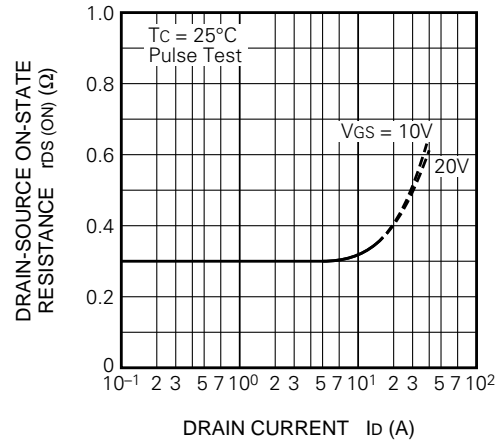


TRANSFER CHARACTERISTICS (TYPICAL)

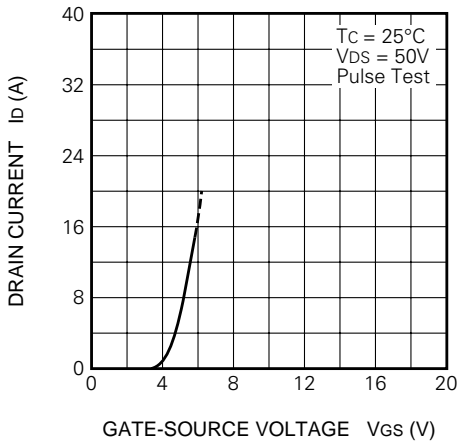


FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT (TYPICAL)

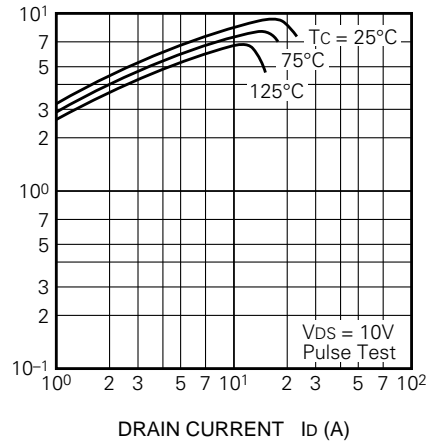


CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL)

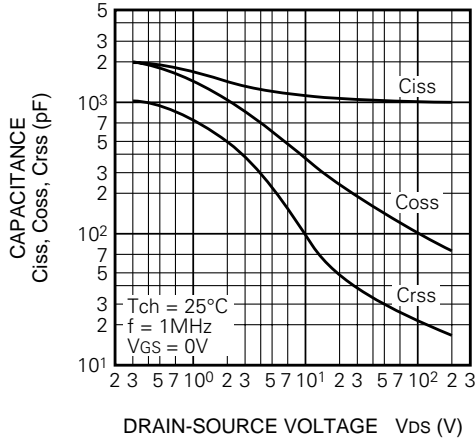


SWITCHING CHARACTERISTICS (TYPICAL)

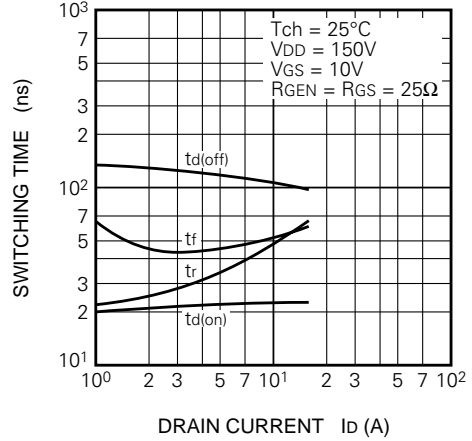


GATE-SOURCE VOLTAGE VS. GATE CHARGE (TYPICAL)

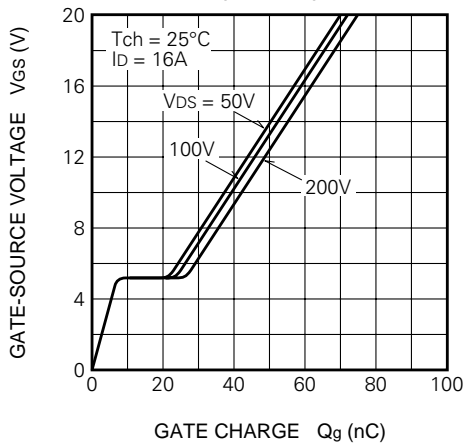

SOURCE-DRAIN DIODE FORWARD CHARACTERISTICS (TYPICAL)

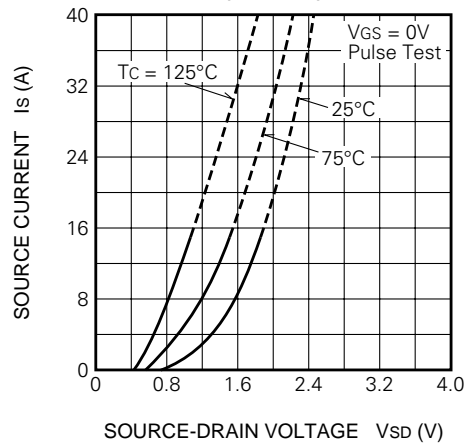

ON-STATE RESISTANCE VS. CHANNEL TEMPERATURE (TYPICAL)

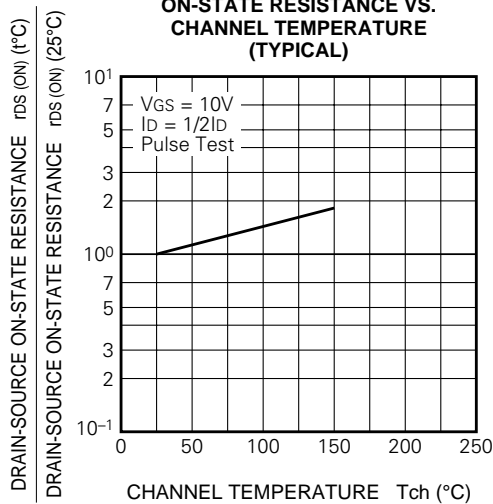

THRESHOLD VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

