


9161

Recording Writer for MSS121

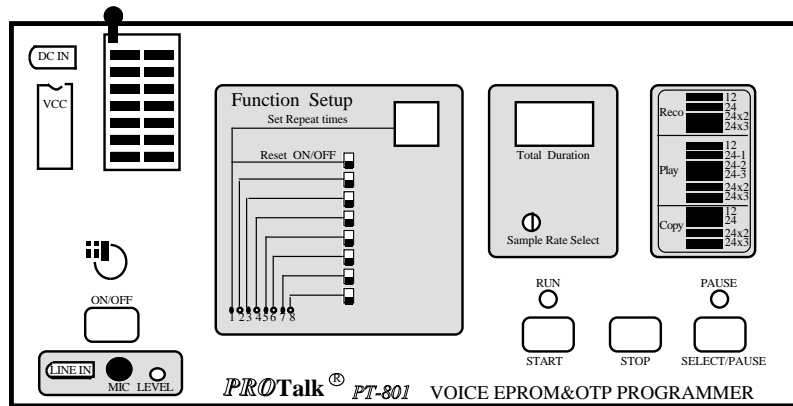

Top Panel

Features

- 12 sec programming time can be chosen at 6K Sample Rate.
- Sample Rate can be adjusted by turning the variable Resistor
- Voice source can be from either MIC or Line in.
- MSS121 can be programmed, one chip at a time.
- Adjusted DIP switch is provided to select the function to be programmed.
- Display panel can display recording time, playing time.
- An red power ON/OFF switch and three push bottom switches are provided : green "START", blue "STOP", orange "SELECT / PAUSE".
- 17 LED lamps are provided :one " LEVEL", one " RUN", one "PAUSE" and 14 " Selection".
- A one digit 7-segment LED is provided to display repeat time of option bit.
- A 3-digit 7-segment LED is provided to display total duration. "012" means 12 seconds duration.
- A variable resistor is provided to set up sampling rate on the top panel.
- An Volume Level indicator is provided.
- Speaker is built in bottom plate.
- DC 12V / 800mA adaptor is used.

Front Panel



Side Panel

