

The RF Line PNP Silicon High-Frequency Transistor

Designed primarily for use in the high-gain, low-noise small-signal amplifiers for operation up to 3.5 GHz. Also usable in applications requiring fast switching times.

- High Current Gain-Bandwidth Product —
 $f_T = 3.4 \text{ GHz (Typ) @ } I_C = -35 \text{ mAdc (MMBR521LT1)}$
 $f_T = 4.2 \text{ GHz (Typ) @ } I_C = -50 \text{ mAdc (MRF5211LT1)}$
- Low Noise Figure @ $f = 1.0 \text{ GHz}$ —
 $NF_{(\text{matched})} = 2.5 \text{ dB (Typ) (MMBR521LT1)}$
 $NF_{(\text{matched})} = 2.8 \text{ dB (Typ) (MRF5211LT1)}$
- High Power Gain — $G_{pe} (\text{matched}) = 11 \text{ dB (Typ)}$
- Guaranteed RF Parameters
- Surface Mounted SOT-23 (MMBR521LT1) & SOT-143 (MRF5211LT1)
Offer Improved RF Performance
Lower Package Parasitics
Higher Gain
- Available in tape and reel packaging options:
T1 suffix = 3,000 units per reel

MAXIMUM RATINGS

Ratings	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	-10	Vdc
Collector-Base Voltage	V_{CBO}	-20	Vdc
Emitter-Base Voltage	V_{EBO}	-2.5	Vdc
Power Dissipation (1) $T_C = 75^\circ\text{C}$, Derate linearly above $T_C = 75^\circ\text{C}$ @ All	$P_{D(\text{max})}$	0.333 4.44	W mW/ $^\circ\text{C}$
Collector Current — Continuous	I_C	-70	mA
Maximum Junction Temperature	$T_{J\text{max}}$	150	$^\circ\text{C}$
Storage Temperature All	T_{stg}	-55 to +150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Ratings	Symbol	Value	Unit
Thermal Resistance, Junction to Case (MMBR521LT1, MRF5211LT1)	$R_{\theta\text{JC}}$	225	$^\circ\text{C/W}$

DEVICE MARKING


MMBR521LT1 = 7M	MRF5211LT1 = 04
-----------------	-----------------

NOTE:


1. Case Temperature is measured on the collector lead closest to the package. For case temperatures above $+75^\circ\text{C}$: $P_{\text{DISP}(\text{max})} = (T_{J\text{max}} - T_C) / R_{\theta\text{JC}}$

MMBR521LT1
MRF5211LT1

$I_C = -70 \text{ mA}$
HIGH-FREQUENCY
TRANSISTOR
PNP SILICON



CASE 318-08, STYLE 6
SOT-23
LOW PROFILE
(TO-236AA/AB)
MMBR521LT1



CASE 318A-05, STYLE 1
SOT-143
LOW PROFILE
MRF5211LT1

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Breakdown Voltage ($I_C = -1.0\text{ mAdc}$, $I_B = 0$)	$V_{(BR)CEO}$	-10	-12	—	Vdc
Collector-Base Breakdown Voltage ($I_C = -0.1\text{ mAdc}$, $I_E = 0$)	$V_{(BR)CBO}$	-20	—	—	Vdc
Emitter-Base Breakdown Voltage ($I_E = -50\text{ }\mu\text{Adc}$, $I_C = 0$)	$V_{(BR)EBO}$	-2.5	—	—	Vdc
Collector Cutoff Current ($V_{CB} = -8.0\text{ Vdc}$, $I_E = 0$)	I_{CBO}	—	—	-10	μAdc

ON CHARACTERISTICS

DC Current Gain ($I_C = -30\text{ mAdc}$, $V_{CE} = -5.0\text{ Vdc}$)	h_{FE}	25	—	125	—
--	----------	----	---	-----	---

DYNAMIC CHARACTERISTICS

Collector-Base Capacitance ($V_{CB} = -6.0\text{ Vdc}$, $I_E = 0$, $f = 1.0\text{ MHz}$)	C_{cb}	—	1.0	1.5	pF
Current Gain — Bandwidth Product	f_T				GHz
($V_{CE} = -8.0\text{ V}$, $I_C = -35\text{ mA}$, $f = 1.0\text{ GHz}$)	MMBR521LT1	—	3.4	—	
($V_{CE} = -8.0\text{ V}$, $I_C = -50\text{ mA}$, $f = 1.0\text{ GHz}$)	MRF5211LT1	—	4.2	—	

FUNCTIONAL TESTS

Power Gain at Minimum Noise Figure	G_{NFmin}				dB
($V_{CE} = -6.0\text{ V}$, $I_C = -5.0\text{ mA}$, $f = 500\text{ MHz}$)	MMBR521LT1	13	15	—	
($V_{CE} = -6.0\text{ V}$, $I_C = -5.0\text{ mA}$, $f = 1.0\text{ GHz}$)	MMBR521LT1	8.0	10	—	
($V_{CE} = -6.0\text{ V}$, $I_C = -5.0\text{ mA}$, $f = 1.0\text{ GHz}$)	MRF5211LT1	10	11	—	
Noise Figure — Minimum	NF_{min}				dB
($V_{CE} = -6.0\text{ V}$, $I_C = -5.0\text{ mA}$, $f = 500\text{ MHz}$)	MMBR521LT1	—	1.5	2.5	
($V_{CE} = -6.0\text{ V}$, $I_C = -5.0\text{ mA}$, $f = 1.0\text{ GHz}$)	MMBR521LT1	—	2.5	3.5	
($V_{CE} = -6.0\text{ V}$, $I_C = -5.0\text{ mA}$, $f = 1.0\text{ GHz}$)	MRF5211LT1	—	2.8	3.5	

TYPICAL CHARACTERISTICS

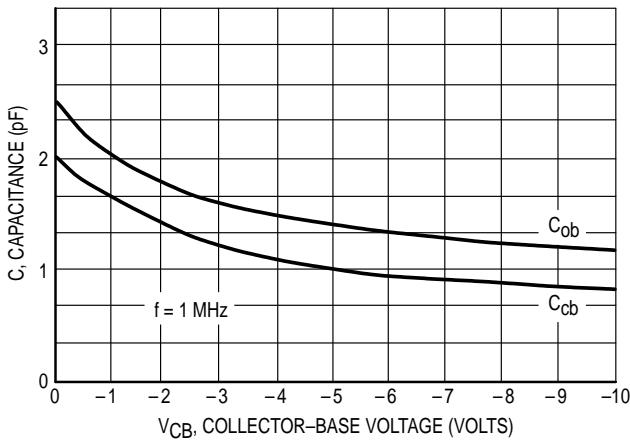


Figure 1. Junction Capacitance versus Voltage

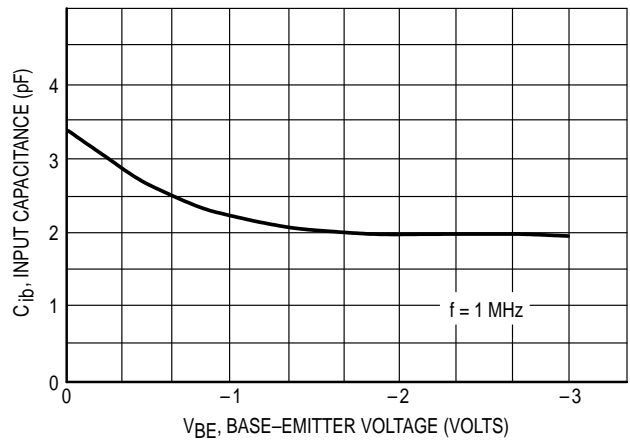


Figure 2. Input Capacitance versus Voltage

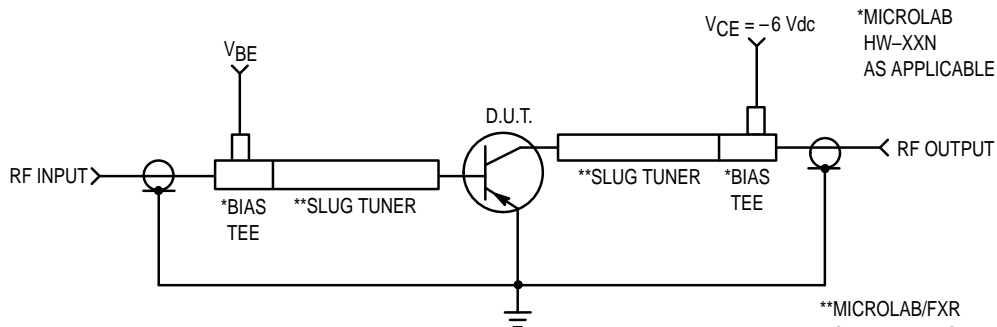


Figure 3. Functional Circuit Schematic

*MICROLAB
HW-XXN
AS APPLICABLE

**MICROLAB/FXR
SF — 11N < 1 GHz
SF — 311N ≥ 1 GHz

**TYPICAL CHARACTERISTICS
MMBR521LT1**

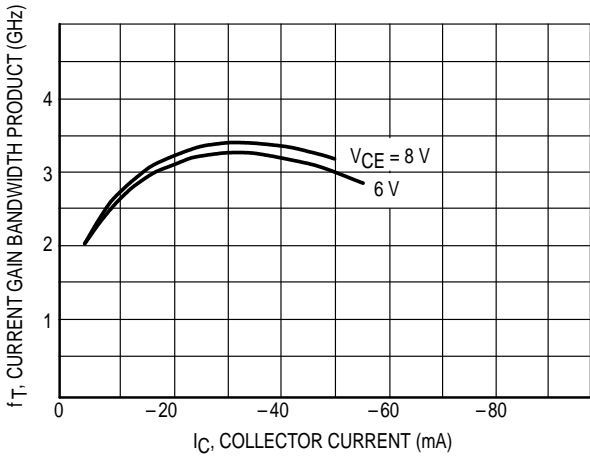


Figure 4. Current Gain Bandwidth Product versus Collector Current

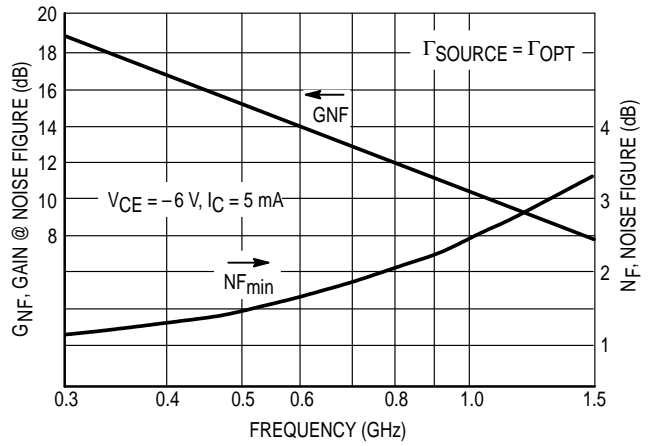


Figure 5. Minimum Noise Figure & Gain @ Noise Figure versus Frequency

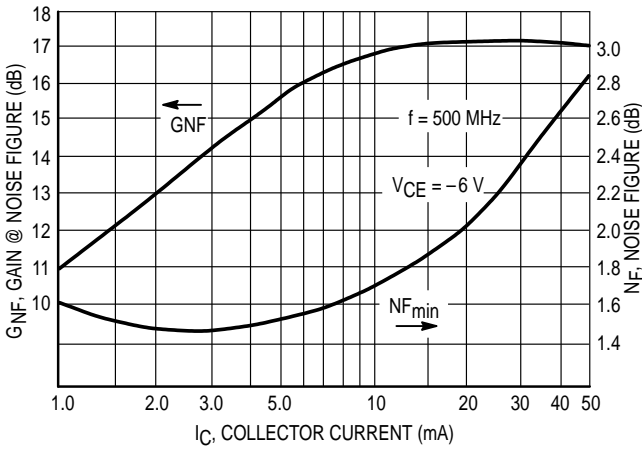


Figure 6. Minimum Noise Figure & Gain @ Noise Figure versus Collector Current

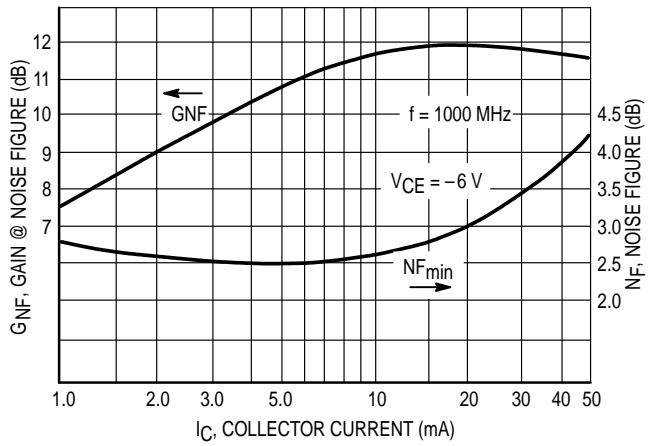


Figure 7. Minimum Noise Figure & Gain @ Noise Figure versus Collector Current

**TYPICAL CHARACTERISTICS
MRF5211LT1**

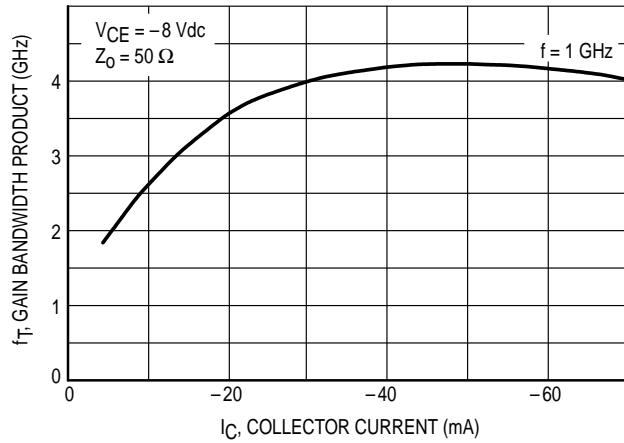


Figure 8. Gain-Bandwidth Product versus Current

GAIN AND NOISE FIGURE versus FREQUENCY

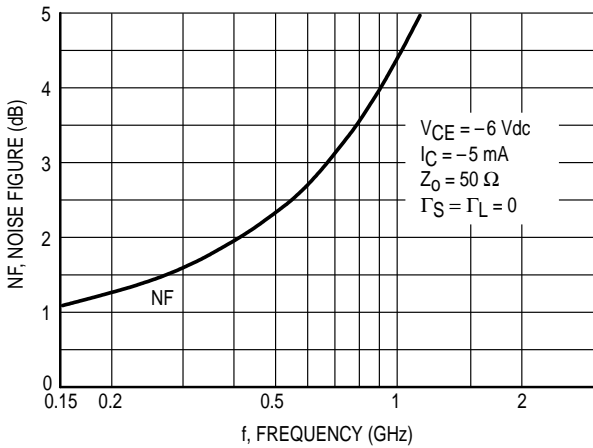


Figure 9. 50 Ohm Noise Figure

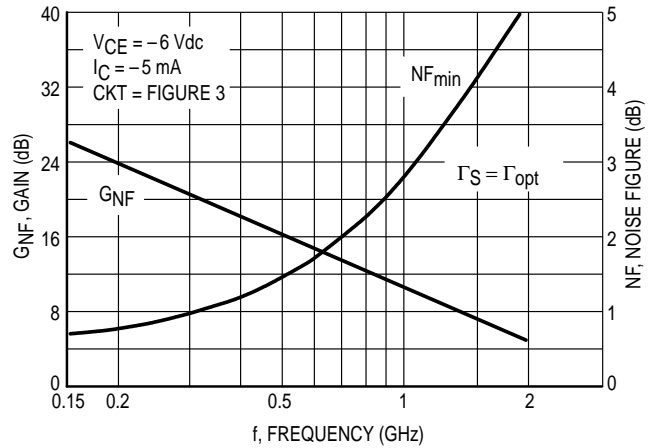


Figure 10. Tuned Circuit

GAIN AND NOISE FIGURE versus CURRENT

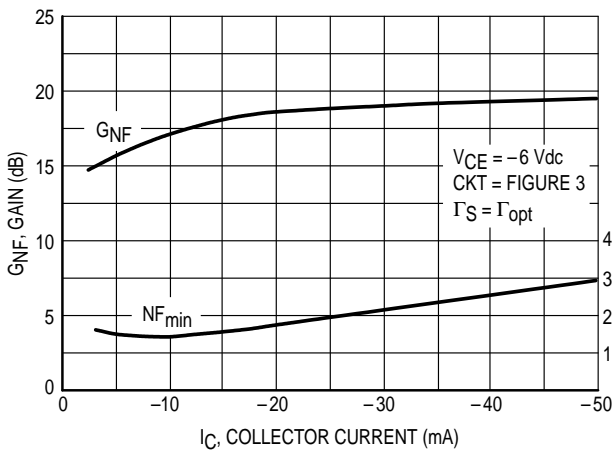


Figure 11. Tuned Circuit — Frequency 500 MHz

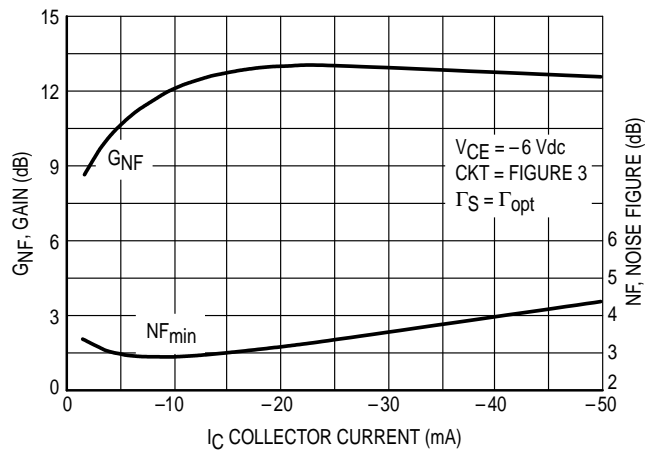


Figure 12. Tuned Circuit — Frequency 1.0 GHz

TYPICAL CHARACTERISTICS — continued
MRF5211LT1

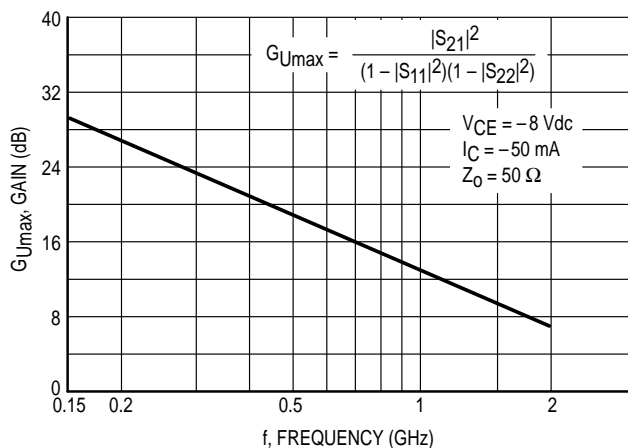


Figure 13. GUmax versus Current

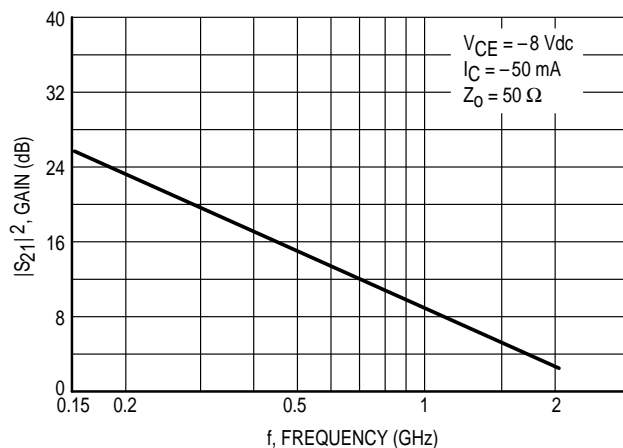


Figure 14. Insertion Gain versus Frequency

VCE (Vdc)	IC (mA)	f (MHz)	S11		S21		S12		S22		
			S11	∠φ	S21	∠φ	S12	∠φ	S22	∠φ	
6	5	100	0.754	-67	11.453	141	0.040	59	0.818	-24	
		300	0.683	-132	6.106	105	0.065	39	0.549	-37	
		500	0.667	-157	3.954	89	0.071	39	0.472	-40	
		700	0.660	-171	2.890	78	0.078	44	0.452	-44	
		900	0.656	179	2.294	69	0.085	50	0.449	-49	
		1000	0.654	175	2.086	65	0.091	53	0.451	-52	
		1500	0.641	158	1.442	48	0.130	64	0.480	-66	
		2000	0.672	140	1.108	36	0.188	69	0.466	-79	
		2500	0.681	124	0.917	26	0.261	66	0.483	-94	
		3000	0.681	110	0.793	18	0.343	60	0.493	-110	
		3500	0.686	96	0.716	13	0.426	52	0.500	-126	
		4000	0.683	84	0.674	9	0.503	43	0.502	-143	
		4500	0.678	73	0.653	6	0.568	34	0.503	-160	
		5000	0.669	64	0.653	3	0.620	24	0.507	-176	
		10	10	100	0.632	-92	16.621	131	0.032	55	0.694
	300			0.618	-149	7.460	98	0.050	47	0.417	-41
	500			0.618	-168	4.671	85	0.061	53	0.358	-44
	700			0.616	-178	3.392	76	0.076	58	0.346	-47
	900			0.615	173	2.672	68	0.092	62	0.347	-52
	1000			0.613	170	2.429	64	0.100	63	0.352	-55
	1500			0.601	155	1.677	48	0.150	66	0.382	-68
	2000			0.633	138	1.294	36	0.208	68	0.371	-80
	2500			0.642	124	1.078	25	0.273	62	0.391	-94
	3000			0.646	110	0.929	16	0.346	56	0.408	-109
	3500			0.656	98	0.827	10	0.422	49	0.421	-124
	4000			0.662	86	0.756	4	0.494	41	0.431	-141
	4500			0.664	75	0.709	1	0.554	32	0.442	-158
	5000			0.664	66	0.683	-3	0.609	24	0.455	-174
	50			50	100	0.547	-149	21.107	115	0.017	63
		300	0.606		-174	7.891	90	0.037	68	0.260	-42
		500	0.616		177	4.811	80	0.058	73	0.239	-44
		700	0.616		171	3.480	72	0.080	73	0.242	-48
		900	0.616		165	2.746	65	0.102	73	0.248	-54
		1000	0.615		163	2.479	61	0.113	72	0.255	-57
		1500	0.606		150	1.717	46	0.169	69	0.293	-71
		2000	0.643		135	1.327	33	0.229	65	0.289	-82
		2500	0.654		122	1.097	22	0.292	60	0.315	-96
		3000	0.662		108	0.940	13	0.359	54	0.337	-110
		3500	0.672		96	0.825	6	0.427	47	0.356	-126
		4000	0.680		84	0.743	1	0.493	39	0.373	-142
		4500	0.682		74	0.688	-2	0.551	31	0.391	-159
		5000	0.679		64	0.658	-5	0.601	22	0.409	-175
		10	5		100	0.792	-59	11.498	144	0.036	62
	300			0.681	-123	6.513	108	0.061	41	0.598	-32
	500			0.652	-150	4.278	91	0.068	40	0.518	-36
700	0.639			-166	3.142	80	0.073	44	0.496	-39	
900	0.631			-177	2.491	71	0.081	49	0.489	-44	
1000	0.628			179	2.264	67	0.086	53	0.492	-46	
1500	0.616			161	1.560	50	0.120	64	0.514	-58	
2000	0.644			142	1.199	37	0.171	69	0.500	-70	
2500	0.654			126	0.985	26	0.238	68	0.516	-83	
3000	0.661			111	0.843	18	0.314	63	0.523	-98	
3500	0.670			98	0.749	12	0.399	56	0.529	-113	
4000	0.672			85	0.690	8	0.479	47	0.528	-129	
4500	0.671			73	0.656	5	0.549	38	0.524	-146	
5000	0.665			63	0.649	3	0.609	28	0.523	-162	
10	10			100	0.666	-80	17.255	135	0.030	58	0.738
		300	0.596	-141	8.143	101	0.047	48	0.465	-37	
		500	0.587	-162	5.139	87	0.059	53	0.404	-38	
		700	0.581	-174	3.741	78	0.072	58	0.388	-41	
		900	0.578	177	2.947	70	0.086	61	0.387	-45	
		1000	0.577	174	2.670	66	0.095	63	0.389	-48	
		1500	0.565	158	1.856	50	0.139	66	0.413	-60	
		2000	0.596	140	1.431	38	0.191	66	0.402	-70	
		2500	0.608	126	1.177	26	0.253	64	0.420	-82	
		3000	0.619	112	1.008	17	0.319	59	0.434	-96	
		3500	0.632	99	0.886	9	0.393	52	0.444	-110	
		4000	0.644	87	0.797	3	0.465	44	0.453	-126	
		4500	0.652	75	0.732	-1	0.532	36	0.457	-143	
		5000	0.654	65	0.694	-4	0.589	28	0.465	-159	

Table 1. MMBR521LT1 Common Emitter S-Parameters

VCE (Vdc)	IC (mA)	f (MHz)	S11		S21		S12		S22	
			S11	∠φ	S21	∠φ	S12	∠φ	S22	∠φ
-6.0	-5.0	200	0.82	-114	7.9	118	0.07	35	0.59	-46
		500	0.81	-158	4.0	88	0.08	21	0.40	-54
		1000	0.79	175	2.0	67	0.08	21	0.37	-68
		1500	0.76	158	1.3	50	0.07	30	0.43	-82
		2000	0.74	143	1.0	38	0.08	47	0.47	-95
	-10	200	0.78	-137	10.6	109	0.05	32	0.43	-63
		500	0.79	-168	4.9	84	0.06	28	0.26	-75
		1000	0.77	169	2.5	66	0.06	39	0.24	-87
		1500	0.74	155	1.6	50	0.08	49	0.29	-97
		2000	0.71	140	1.2	39	0.10	55	0.32	-106
	-50	200	0.77	-167	13.1	99	0.02	45	0.26	-108
		500	0.77	176	5.7	80	0.04	57	0.18	-132
		1000	0.76	161	2.8	65	0.06	65	0.17	-142
		1500	0.73	149	1.9	51	0.08	67	0.19	-137
		2000	0.70	136	1.4	40	0.12	65	0.20	-137
-8.0	-5.0	200	0.82	-109	8.1	119	0.07	36	0.62	-43
		500	0.80	-154	4.2	90	0.08	22	0.42	-52
		1000	0.78	175	2.2	67	0.08	22	0.38	-65
		1500	0.75	159	1.4	50	0.07	31	0.43	-78
		2000	0.72	143	1.0	37	0.09	43	0.46	-89
	-10	200	0.77	-132	11.2	110	0.05	33	0.45	-61
		500	0.77	-167	5.2	86	0.06	29	0.27	-70
		1000	0.76	169	2.6	67	0.06	39	0.25	-81
		1500	0.73	155	1.7	51	0.07	49	0.29	-90
		2000	0.70	140	1.3	39	0.10	54	0.31	-98
	-50	200	0.75	-164	14.2	100	0.02	43	0.26	-101
		500	0.76	178	6.1	82	0.04	55	0.17	-121
		1000	0.75	163	3.1	67	0.06	64	0.15	-131
		1500	0.72	151	2.0	53	0.08	67	0.18	-126
		2000	0.70	139	1.5	42	0.11	68	0.19	-127

Table 2. MRF5211LT1 Common Emitter S-Parameters

PACKAGE DIMENSIONS

NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

STYLE 6:
PIN 1. BASE
2. EMITTER
3. COLLECTOR

**CASE 318-08
ISSUE AE**

NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: MILLIMETER.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.110	0.120
B	1.20	1.39	0.047	0.055
C	0.84	1.14	0.033	0.045
D	0.39	0.50	0.015	0.020
F	0.79	0.93	0.031	0.037
G	1.78	2.03	0.070	0.080
H	0.013	0.10	0.0005	0.004
J	0.08	0.15	0.003	0.006
K	0.46	0.60	0.018	0.024
L	0.445	0.60	0.0175	0.024
R	0.72	0.83	0.028	0.033
S	2.11	2.48	0.083	0.098

STYLE 1:
PIN 1. COLLECTOR
2. EMITTER
3. EMITTER
4. BASE

**CASE 318A-05
ISSUE J**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:
USA / EUROPE: Motorola Literature Distribution;
 P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609
INTERNET: http://Design-NET.com

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

