


120 Amp Schottky Rectifier

HS12135 - HS12145

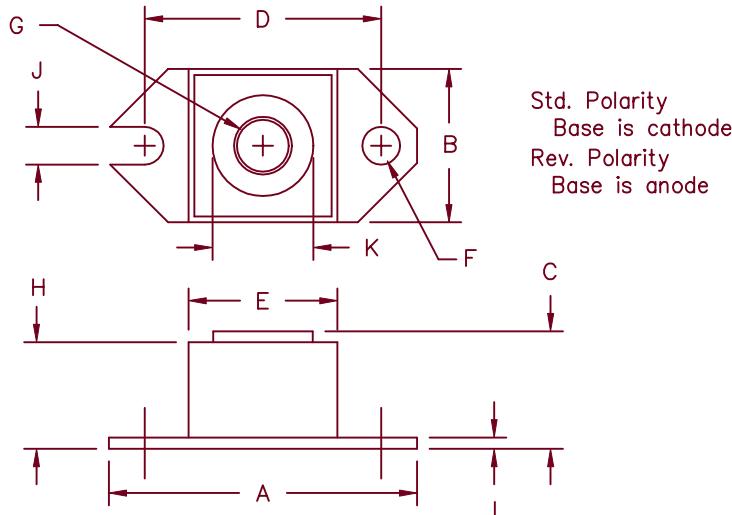

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.52	1.56	38.86	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.182	1.192	30.02	30.28	
E	.745	.755	18.92	19.18	Sq.
F	.152	.160	3.86	4.06	Dia.
G			1/4-20 UNC-2B		
H	.570	.580	14.49	14.73	
J	.156	.160	3.96	4.06	
K	.495	.505	12.57	12.83	
L	.120	.130	3.05	3.30	Dia.

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HS12135*	35V	35V
HS12140*	40V	40V
HS12145*	45V	45V

*Add Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- Guard Ring Protection
- 120 Amperes/ 35 to 45 Volts
- 175°C Junction Temperature
- Reverse Energy Tested

Electrical Characteristics

Average forward current
Maximum surge current
Maximum repetitive reverse current
Max peak forward voltage
Max peak forward voltage
Max peak reverse current
Max peak reverse current
Typical junction capacitance

I_{F(AV)} 120 Amps
I_{FSM} 2000 Amps
I_{R(OV)} 2 Amps
V_{FM} 0.60 Volts
V_{FM} 0.70 Volts
I_{RM} 75 mA
I_{RM} 10 mA
C_J 4600 pF

T_C = 146°C, Square wave, R_{θJC} = 0.40°C/W
8.3ms, half sine, T_J = 175°C
f = 1 KHZ, 25°C
I_{FM} = 120A: T_J = 125°C*
I_{FM} = 120A: T_J = 25°C*
V_{RRM}, T_J = 125°C*
V_{RRM}, T_J = 25°C
V_R = 5.0V, T_C = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance per leg
Typical thermal resistance (greased)
Terminal Torque
Mounting Base Torque
Weight

T_{TG}
T_J
R_{θJC}
R_{θCS}

-55°C to 175°C
-55°C to 175°C
0.40°C/W Junction to case
0.12°C/W Case to sink
35-40 inch pounds
20-25 inch pounds
1.1 ounces (32 grams) typical

HS12135 - HS12145

Figure 1
Typical Forward Characteristics

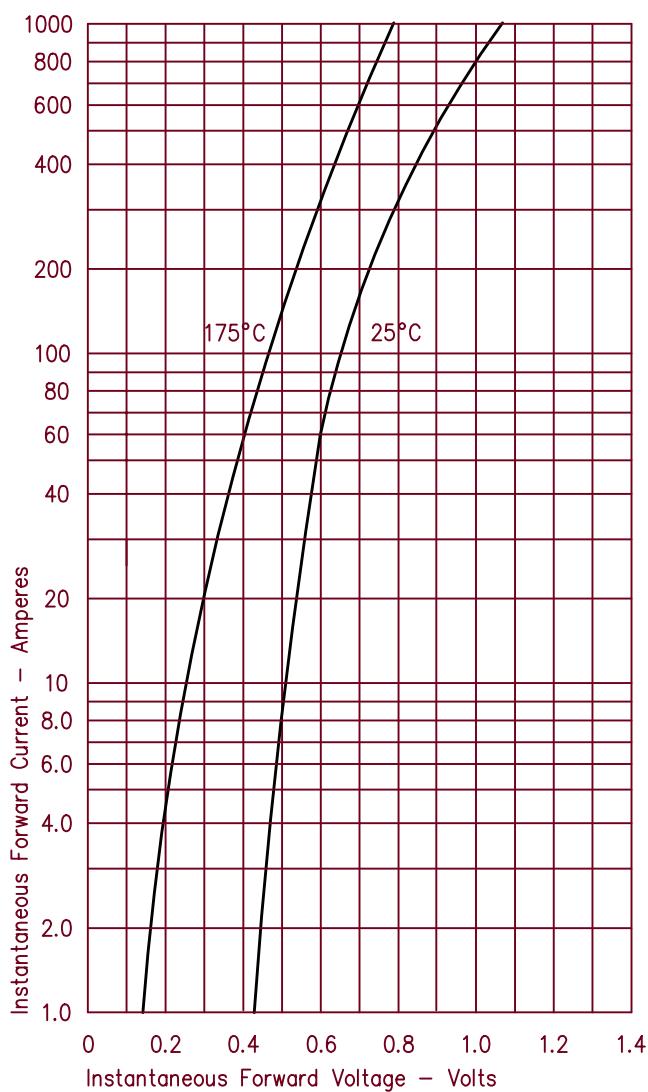


Figure 2
Typical Reverse Characteristics

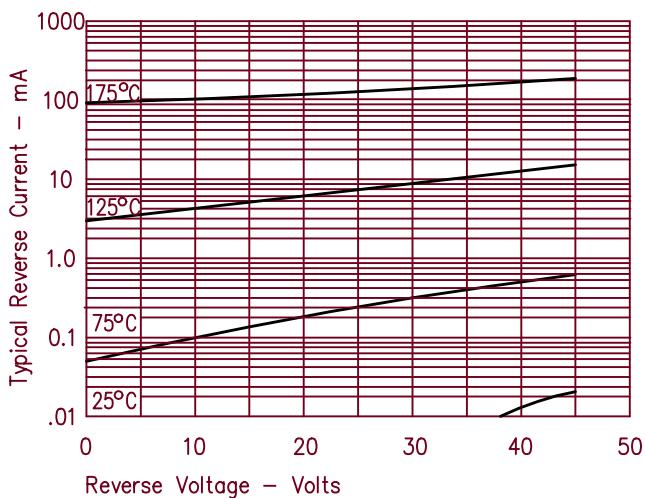


Figure 3
Typical Junction Capacitance

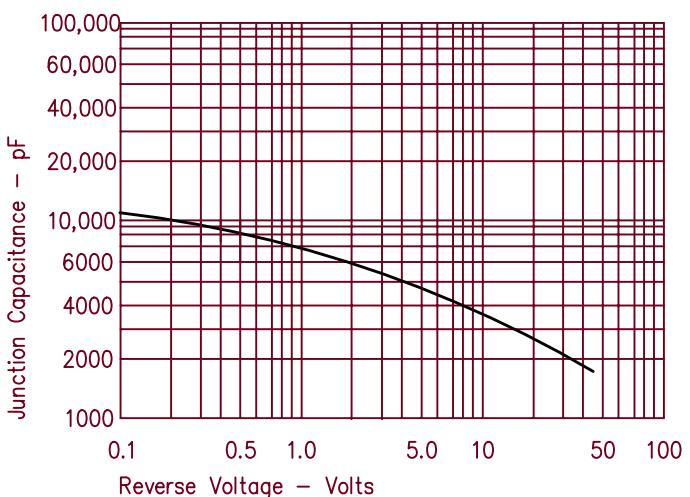


Figure 4
Forward Current Derating

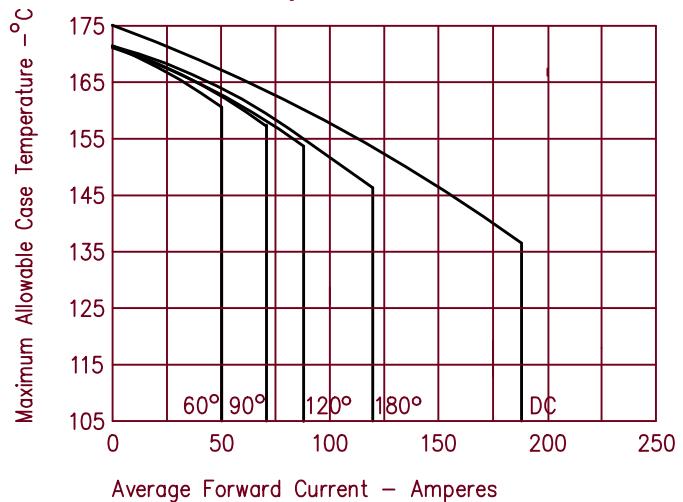


Figure 5
Maximum Forward Power Dissipation

