
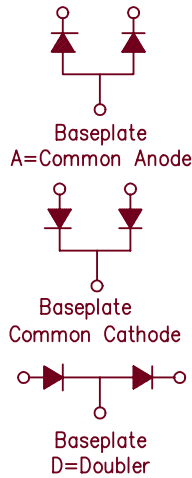


# Silicon Dual Power Rectifier ST3020 — ST30100

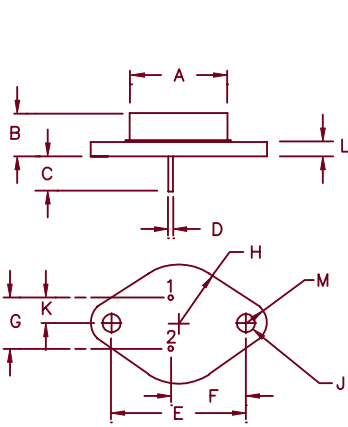

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	—	.875	—	22.23	Dia.
B	.250	.450	6.35	11.43	
C	.312	—	7.92	—	
D	.038	.043	.97	1.09	Dia.
E	1.177	1.197	29.90	30.40	
F	.655	.675	16.64	17.15	
G	.420	.440	10.67	11.18	
H	—	.525	—	13.34	Rad.
J	.151	.161	3.84	4.09	Dia.
K	.205	.225	5.21	5.72	
L	—	.135	—	3.43	
M	—	.188	—	4.78	Rad.

## TO-204AA (TO-3)

Microsemi  
Catalog Number

ST3020\*  
ST3040\*  
ST3060\*  
ST3080\*  
ST30100\*

Peak  
Reverse Voltage

200V  
400V  
600V  
800V  
1000V

\*Add D, C, or A

- Glass Passivated Die
- Glass to metal seal construction
- $V_{RRM}$  200 to 1000V
- 250A Surge Rating
- Available as Common Anode, Common Cathode, or Doubler

### Electrical Characteristics

Average forward current per leg (standard)  
Average forward current per leg (reverse)  
Maximum surge current  
Max  $I^2 t$  for fusing  
Max peak forward voltage  
Max peak reverse current  
Max peak reverse current  
Max Recommended Operating Frequency

$I_{F(AV)}$  15 Amps  
 $I_{F(AV)}$  15 Amps  
 $I_{FSM}$  250 Amps  
 $I^2 t$  260  $A^2s$   
 $V_{FM}$  1.2 Volts  
 $I_{RM}$  10  $\mu A$   
 $I_{RM}$  1.0 mA  
10kHz

$T_C = 125^\circ C$ , half sine wave,  $R_{\theta JC} = 1.4^\circ C/W$   
 $T_C = 82^\circ C$ , half sine wave,  $R_{\theta JC} = 2.2^\circ C/W$   
8.3ms, half sine,  $T_J = 200^\circ C$

$I_{FM} = 15A$ ;  $T_J = 25^\circ C$   
 $V_{RRM}, T_J = 25^\circ C$   
 $V_{RRM}, T_J = 150^\circ C$

\*Pulse test: Pulse width 300  $\mu sec$ . Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temperature range  
Operating junction temp range  
Maximum thermal resistance (standard polarity)  
Maximum thermal resistance (reverse polarity)  
Typical thermal resistance (greased)  
Weight

$T_{STG}$   
 $T_J$   
 $R_{\theta JC}$   
 $R_{\theta JC}$   
 $R_{\theta CS}$

$-65^\circ C$  to  $200^\circ C$   
 $-65^\circ C$  to  $200^\circ C$   
 $1.4^\circ C/W$  Junction to Case  
 $2.2^\circ C/W$  Junction to Case  
 $0.5^\circ C/W$  Case to sink  
1.0 ounces (28 grams) typical

12-6-00 Rev. 1

# ST3020 — ST30100

Figure 1  
Typical Forward Characteristics — Per Leg

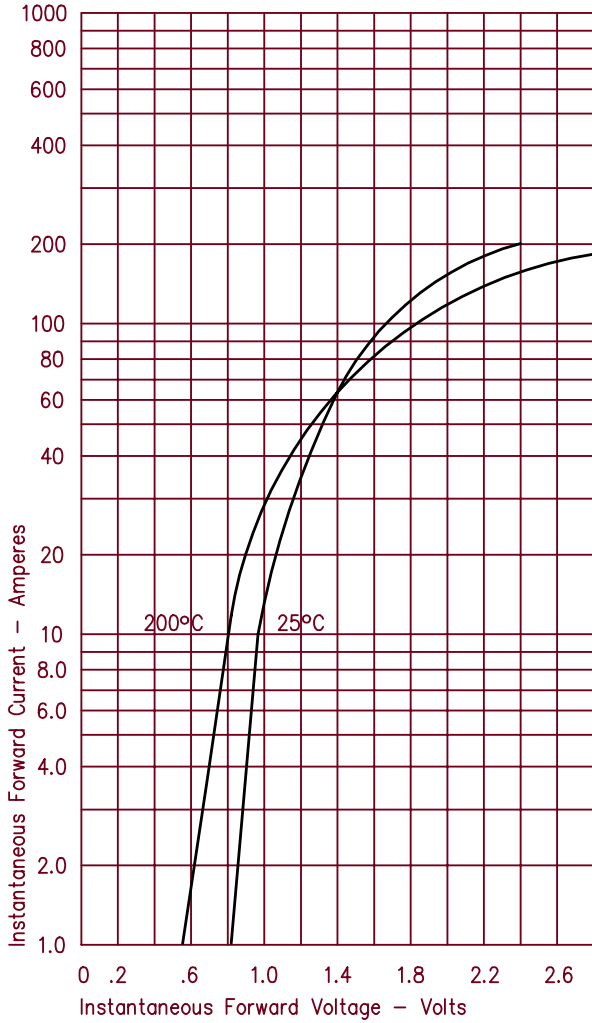


Figure 3  
Forward Current Derating — Per Leg — Standard Polarity

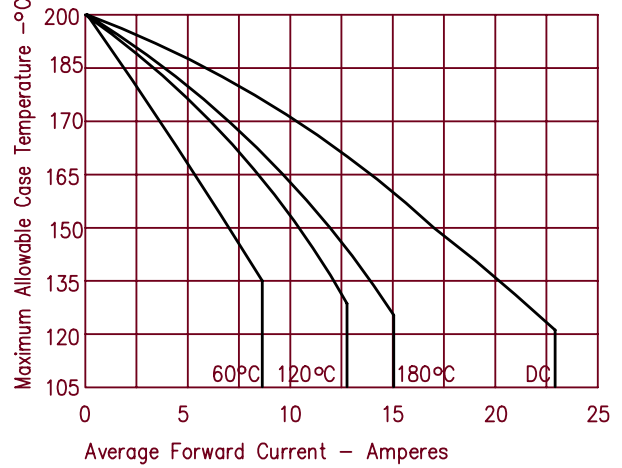


Figure 4  
Maximum Forward Power Dissipation — Per Leg — Standard Polarity

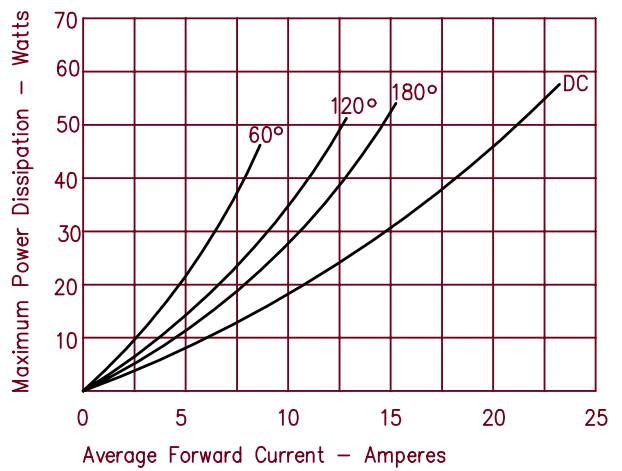


Figure 2  
Typical Reverse Characteristics — Per Leg


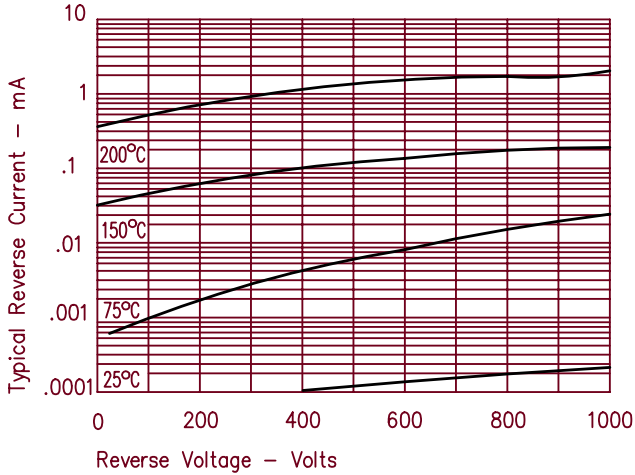


Figure 5  
Forward Current Derating — Per Leg — Reverse Polarity

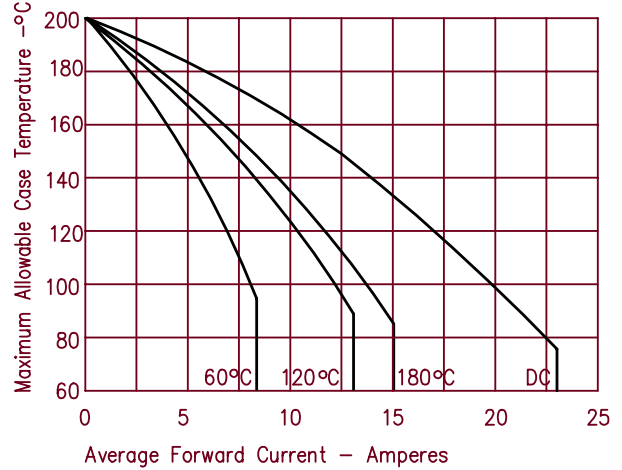

# ST3020 – ST30100

Figure 6  
Maximum Forward Power Dissipation – Per Leg – Reverse Polarity

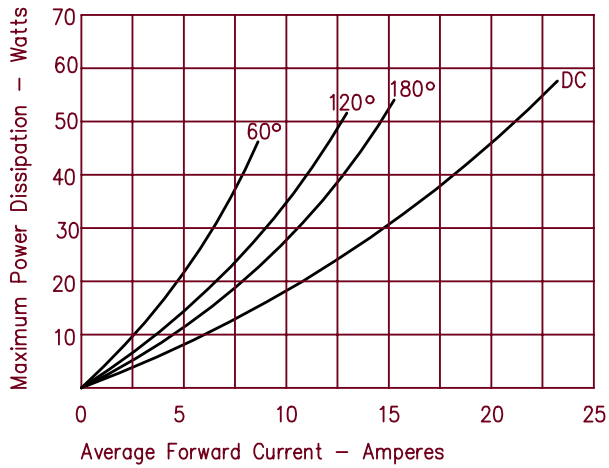


Figure 8  
Transient Thermal Impedance – Per Leg – Reverse Polarity

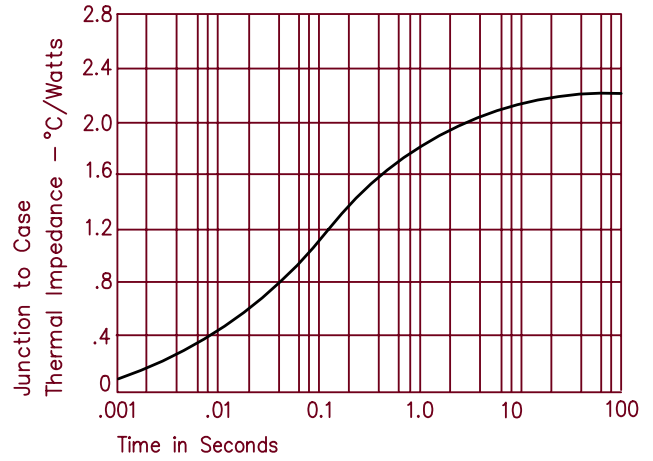


Figure 7  
Transient Thermal Impedance – Per Leg – Standard Polarity

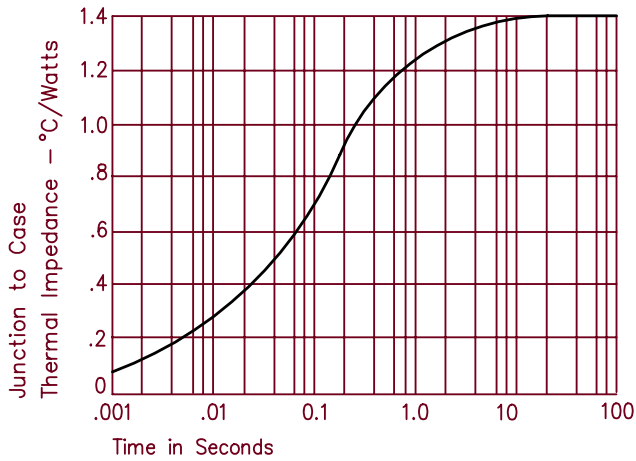


Figure 9  
Maximum Nonrepetitive Surge Current – Per Leg

