


# Ultrafast Recovery Modules UFT150, 151 & 152

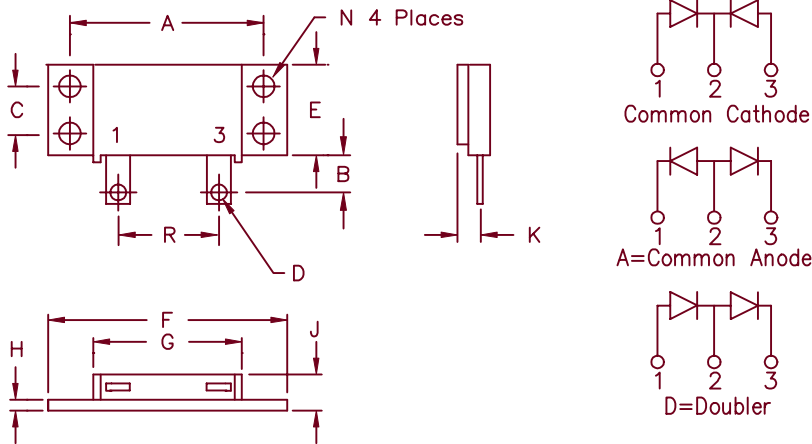

Notes:  
Baseplate: Nickel plated copper,  
common cathode  
Pins: Nickel plated copper

Dim.	Inches		Millimeters		Notes
	Min.	Max.	Min.	Max.	
A	1.995	2.005	50.67	50.93	
B	0.300	0.325	7.62	8.26	
C	0.495	0.505	12.57	12.83	
D	0.182	0.192	4.62	4.88	Dia.
E	0.990	1.010	25.15	25.65	
F	2.390	2.410	60.71	61.21	
G	1.490	1.510	37.85	38.35	
H	0.120	0.130	3.05	3.30	
J	---	0.400	---	10.16	
K	0.240	0.260	6.10	6.60 to	Lead CL
L	0.490	0.510	12.45	12.95	
M	0.330	0.350	8.38	8.90	
N	0.175	0.195	4.45	4.95	Dia.
P	0.035	0.045	0.89	1.14	
R	0.890	0.910	22.61	23.11	

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UFT15010*	100V	100V
UFT15015*	150V	150V
UFT15020*	200V	200V
UFT15130*	300V	300V
UFT15140*	400V	400V
UFT15150*	500V	500V
UFT15260*	600V	600V
UFT15270*	700V	700V
UFT15280*	800V	800V

Add Suffix A for Common Anode, D for Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- $V_{RRM}$  100 to 800 Volts
- High surge capacity
- 2 X 75 Amp current rating

Electrical Characteristics					
	UFT150	UFT151	UFT152		
Average forward current per pkg	$I_F(AV)$ 150A	150A	150A	Square Wave	
Average forward current per leg	$I_F(AV)$ 75A	75A	75A	Square Wave	
Case Temperature	$T_C$ 120°C	100°C	95°C	$R_{\theta JC} = 0.85^\circ C/W$	
Maximum surge current per leg	$I_{FSM}$ 1000A	800A	700A	8.3ms, half sine, $T_J = 175^\circ C$	
Max peak forward voltage per leg	$V_{FM}$ .975V	1.25V	1.35V	$I_{FM} = 70A; T_J = 25^\circ C^*$	
Max reverse recovery time per leg	$t_{rr}$ 50ns	60ns	75ns	1/2A, 1A, 1/4A, $T_J = 25^\circ C$	
Max peak reverse current per leg	$I_{RM}$ _____	3.0mA	_____	$V_{RRM, T_J = 125^\circ C^*$	
Max peak reverse current per leg	$I_{RM}$ _____	25μA	_____	$V_{RRM, T_J = 25^\circ C}$	
Typical Junction capacitance	$C_J$ 300pF	150pF	150pF	$V_R = 10V, T_J = 25^\circ C$	

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temp range	$T_{STG}$	-55°C to 175°C
Operating junction temp range	$T_J$	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	0.85°C/W Junction to case
Max thermal resistance per leg	$R_{\theta JC}$	0.425°C/W Junction to case
Typical thermal resistance per pkg	$R_{\theta JC}$	0.8°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.1°C/W Case to sink
Mounting Torque		15-20 inch pounds
Weight		2.5 ounces (71 grams) typical

# UFT150

Figure 1  
Typical Forward Characteristics – Per Leg

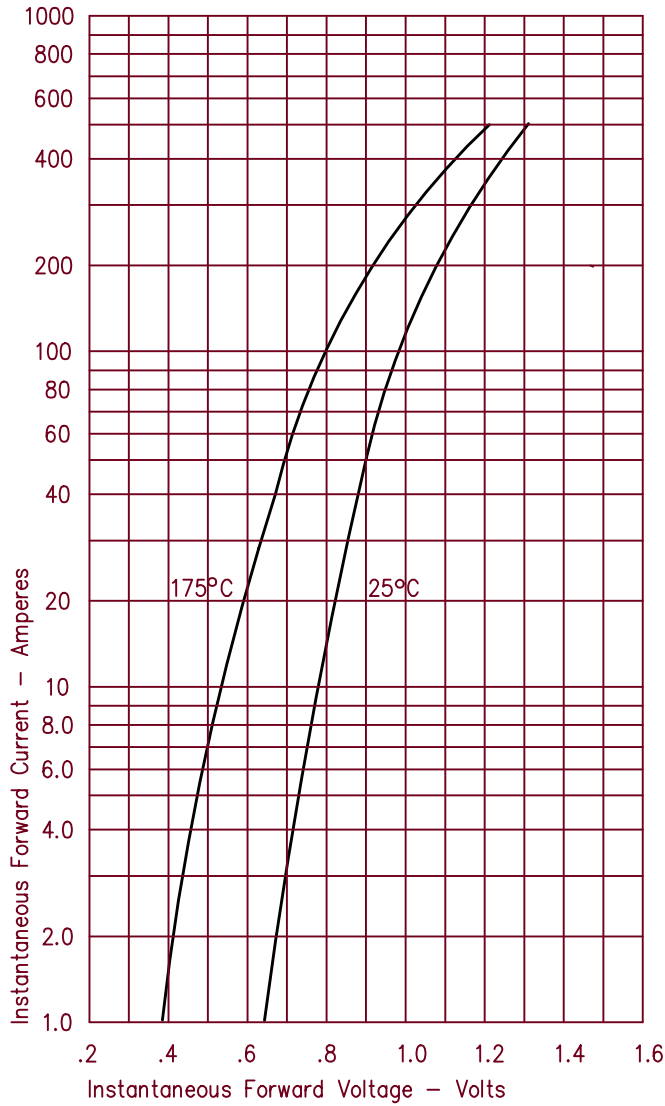


Figure 3  
Typical Junction Capacitance – Per Leg

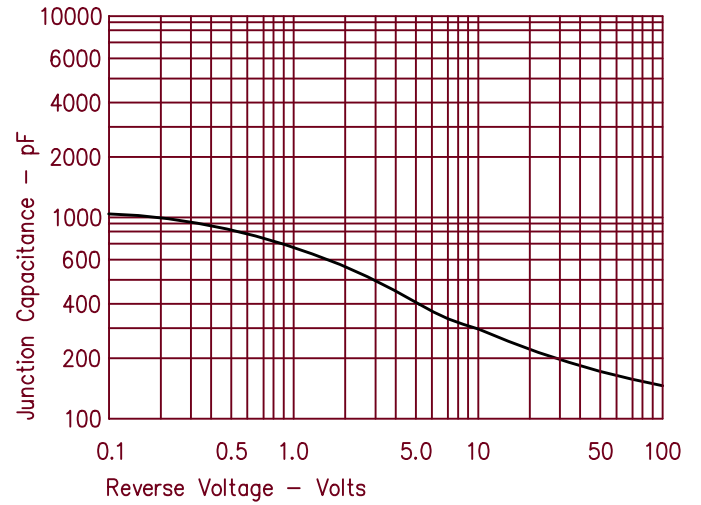


Figure 4  
Forward Current Derating – Per Leg

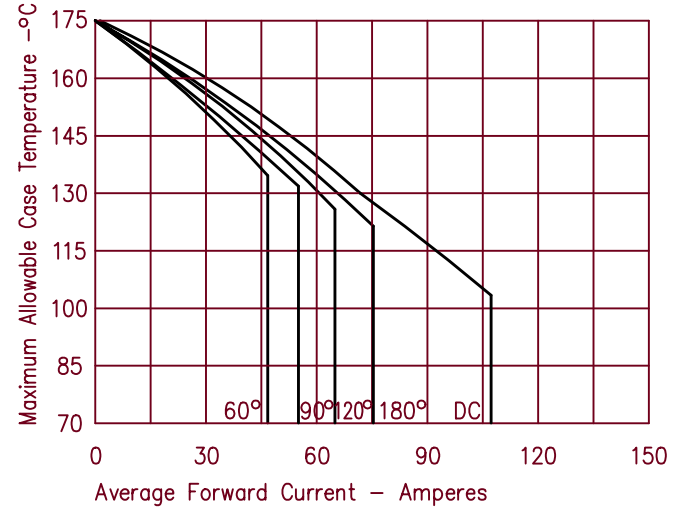


Figure 2  
Typical Reverse Characteristics – Per Leg


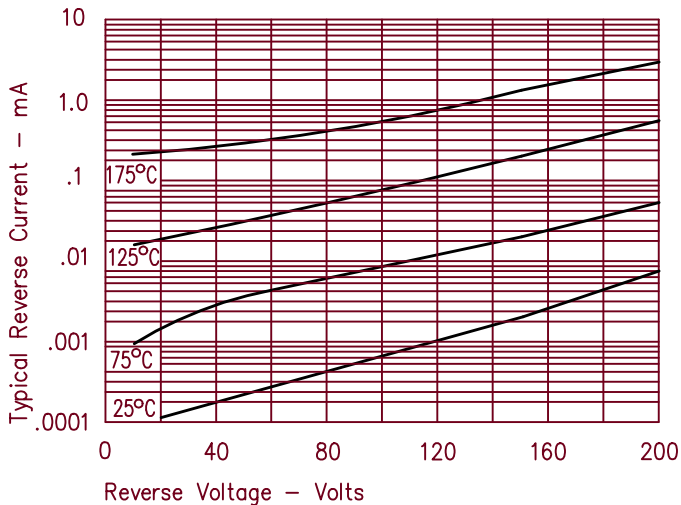


Figure 5  
Maximum Forward Power Dissipation – Per Leg

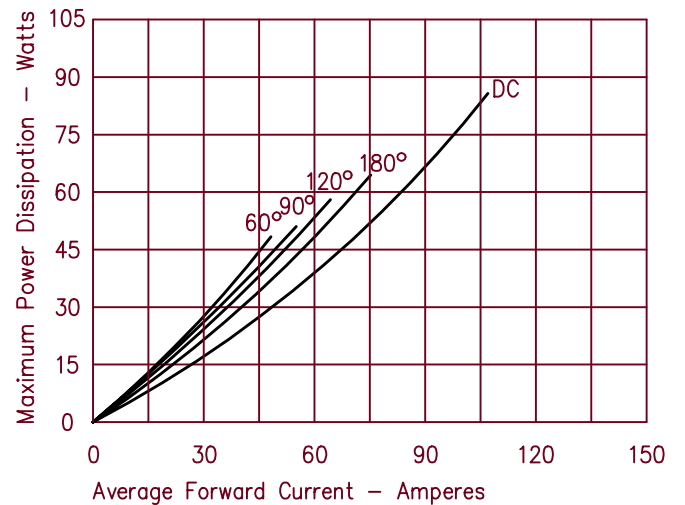

# UFT151

Figure 1  
Typical Forward Characteristics – Per Leg

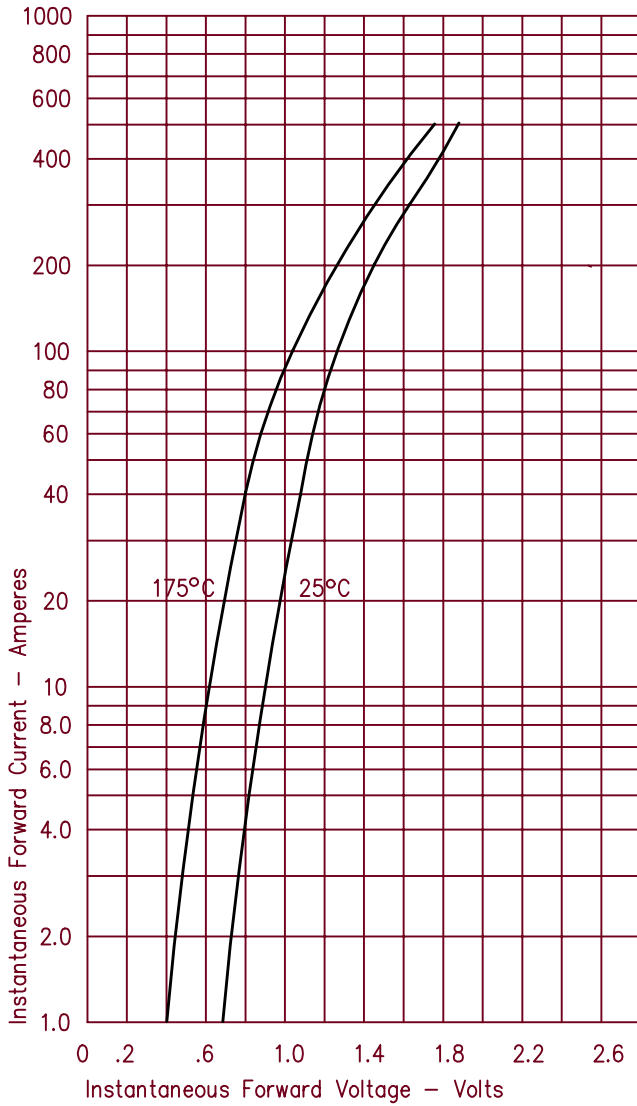


Figure 3  
Typical Junction Capacitance – Per Leg

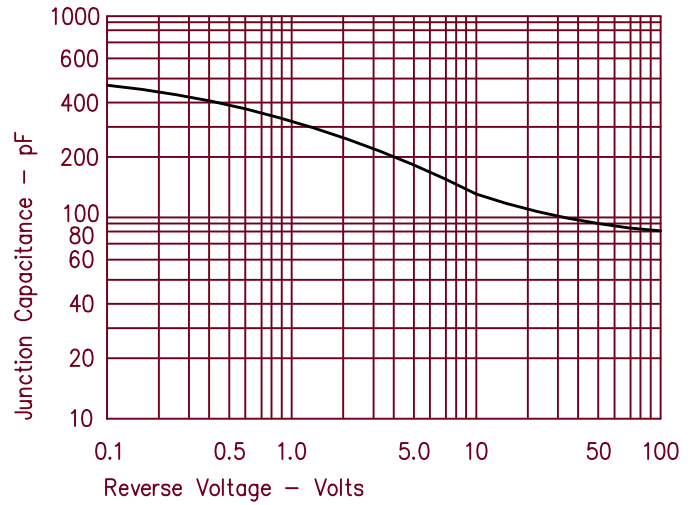


Figure 4  
Forward Current Derating – Per Leg

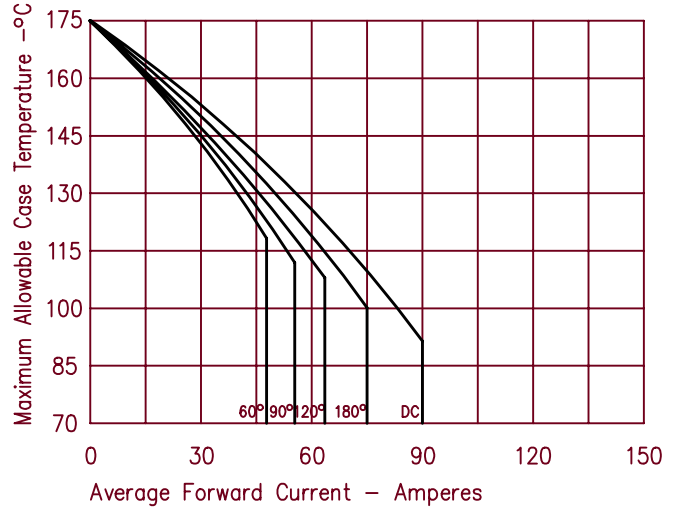


Figure 2  
Typical Reverse Characteristics – Per Leg


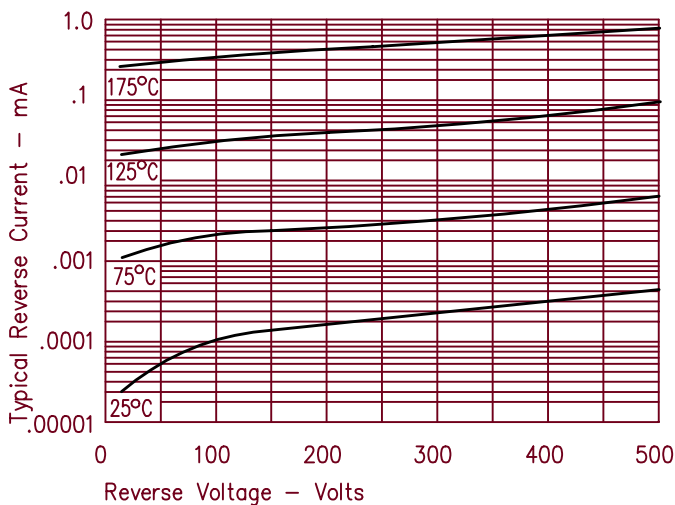


Figure 5  
Maximum Forward Power Dissipation – Per Leg

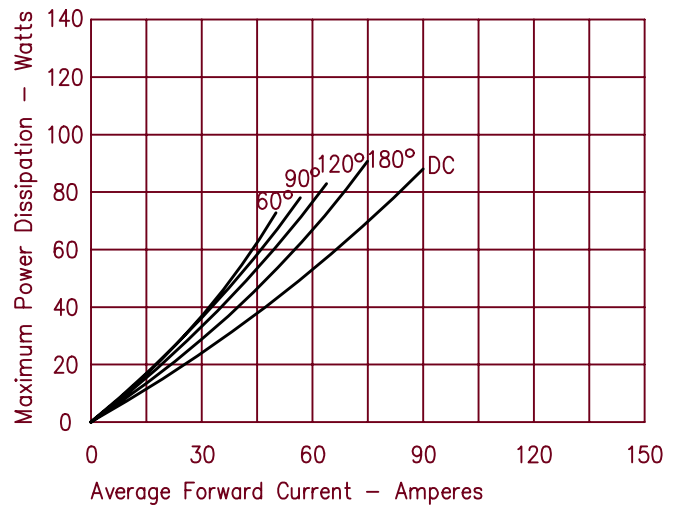

# UFT152

Figure 1  
Typical Forward Characteristics – Per Leg

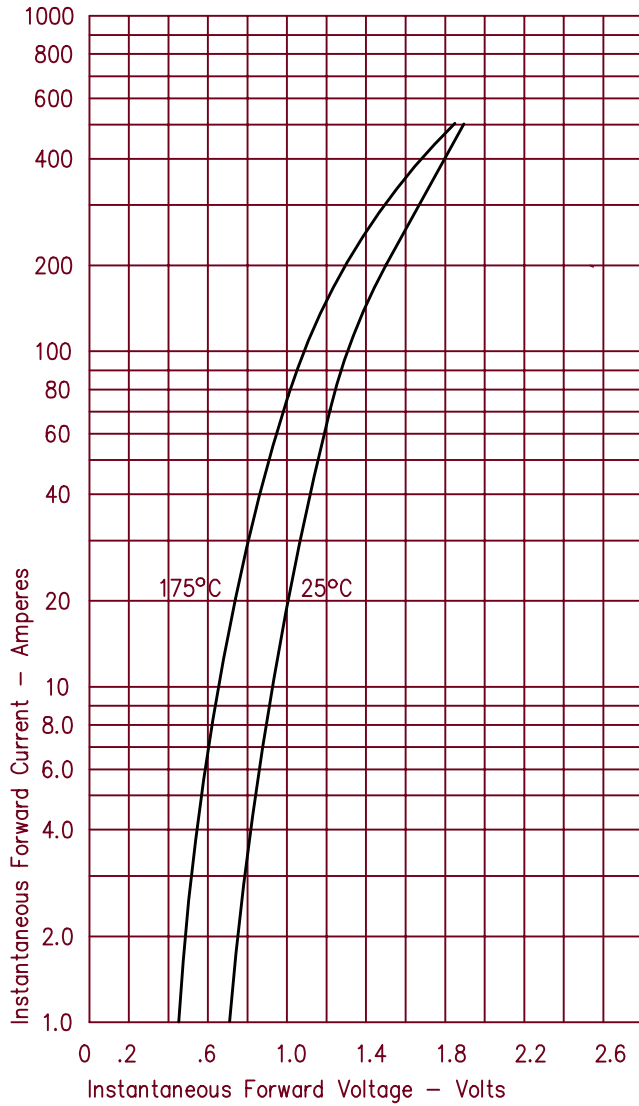


Figure 3  
Typical Junction Capacitance – Per Leg

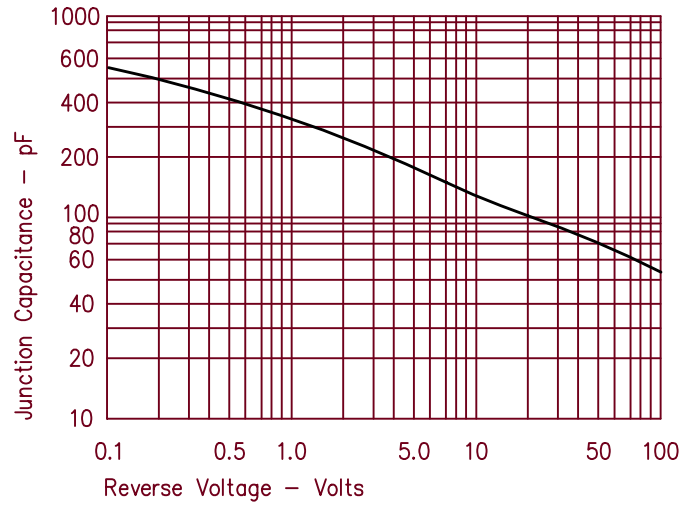


Figure 4  
Forward Current Derating – Per Leg

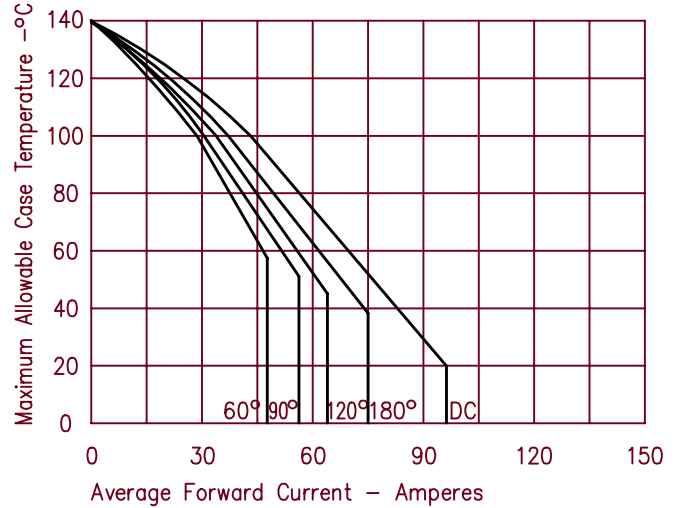


Figure 2  
Typical Reverse Characteristics – Per Leg

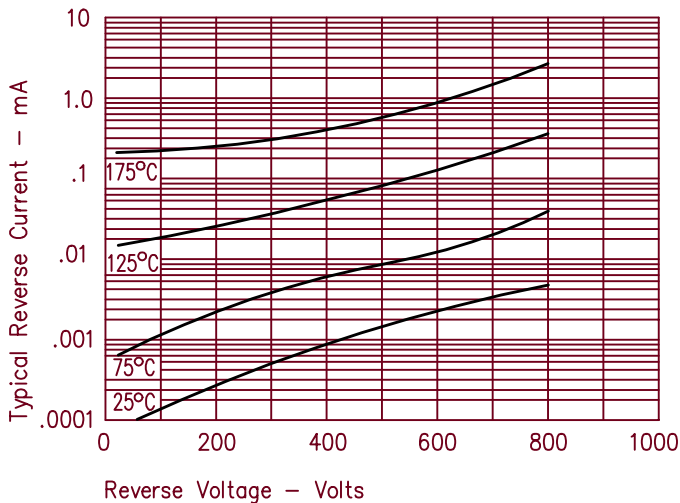


Figure 5  
Maximum Forward Power Dissipation – Per Leg

