

FEATURES

1. Compact 8-pin DIP size

The device comes in a compact (W) 6.4x(L) 9.78x(H) 3.9 m (W) .252x(L) .385x(H) .154 inch, 8-pin DIP size (through hole terminal type).

2. Applicable for 1 Form A 1 Form B use as well as two independent 1 Form A and 1 Form B use

3. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.


4. High sensitivity, low ON resistance

Can control a maximum 0.16 A (AQW654) load current with a 5 mA input current. Low ON resistance of 16 Ω (AQW654). Stable operation because there are no metallic contact parts.


5. Low-level off state leakage current

The SSR has an off state leakage current of several miliamperes, whereas the PhotoMOS relay has only 100 pA even with the rated load voltage of 400 V (AQW654).

6. Low thermal electromotive force (Approx. 1 μ V)

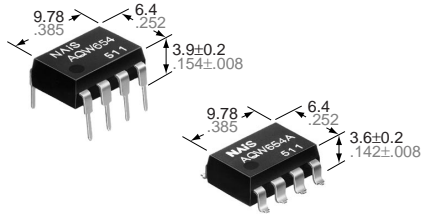

mm inch



TYPICAL APPLICATIONS

- High-speed inspection machines
- Data communication equipment
- Telephone equipment

TYPES

Type	Output rating*		Part No.				Packing quantity	
			Through hole terminal	Surface-mount terminal				
	Load voltage	Load current	Tube packing style		Tape and reel packing style		Tube	Tape and reel
		AQW654	AQW654A	Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side			
AC/DC	400 V	120 mA	AQW654	AQW654A	AQW654AX	AQW654AZ	1 tube contains 40 pcs. 1 batch contains 400 pcs.	1,000 pcs

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	AQW654(A)	Remarks	
Input	LED forward current	I_F	50 mA	
	LED reverse voltage	V_R	3 V	
	Peak forward current	I_{FP}	1 A	$f = 100$ Hz, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW	
Output	Load voltage (peak AC)	V_L	400 V	
	Continuous load current	I_L	0.12A (0.16 A)	Peak AC, DC () : in case of using only 1 channel)
	Peak load current	I_{peak}	0.36 A	A connection: 100 ms (1 shot), $V_L = DC$
	Power dissipation	P_{out}	800 mW	
Total power dissipation	P_T	850 mW		
I/O isolation voltage	V_{iso}	1,500 V AC	Between input and output/between contact sets	
Temperature limits	Operating	T_{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
	Storage	T_{stg}	-40°C to +100°C -40°F to +212°F	


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW654(A)	Remarks	
Input	LED operate (OFF) current	Typical	I_{Fon} (N.O.)	0.9 mA	
		Maximum	I_{Foff} (N.C.)	3 mA	
	LED reverse (ON) current	Minimum	I_{Foff} (N.O.)	0.4 mA	
		Typical	I_{Fon} (N.C.)	0.8 mA	
LED dropout voltage	Typical	V_F	1.14 V (1.25 V at $I_F = 50$ mA)		
	Maximum		1.5 V		
Output	On resistance	Typical	10 Ω (N.O.) 11 Ω (N.C.)		
		Maximum	16 Ω (N.O.) 16 Ω (N.C.)		
	Off state leakage current	Maximum	I_{Leak}	1 μA	$I_F = 0$ mA (N.O.) $I_F = 5$ mA (N.C.) $V_L = 400$ V
Transfer characteristics	Switching speed	Operate (OFF) time*	Typical	0.8 ms (N.O.) 1.2 ms (N.C.)	
			Maximum	2 ms	
		Reverse (ON) time*	Typical	0.04 ms (N.O.) 0.36 ms (N.C.)	
			Maximum	1 ms	
	I/O capacitance	Typical	C_{iso}	0.8 pF	
Maximum		1.5 pF			
Initial I/O isolation resistance	Minimum	R_{iso}	1,000 MΩ	500 V DC	

Note: Recommendable LED forward current $I_F = 5$ mA.

For type of connection, see page 32.

*Operate/Reverse time

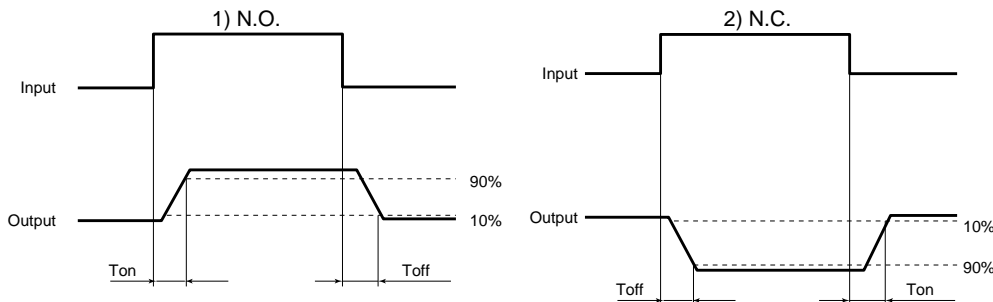


- For Dimensions, see Page 27.
- For Schematic and Wiring Diagrams, see Page 32.
- For Cautions for Use, see Page 36.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

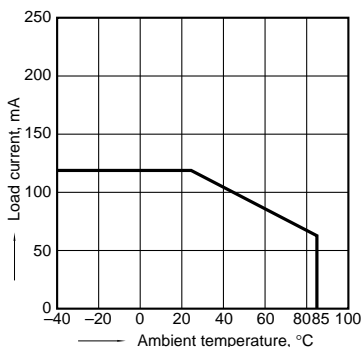


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

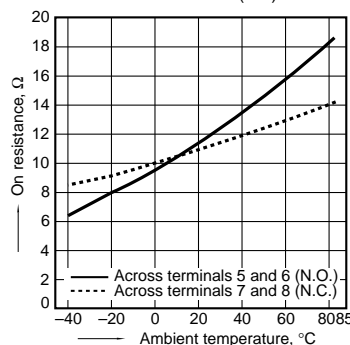

3. Operate (OFF) time vs. ambient temperature characteristics


LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

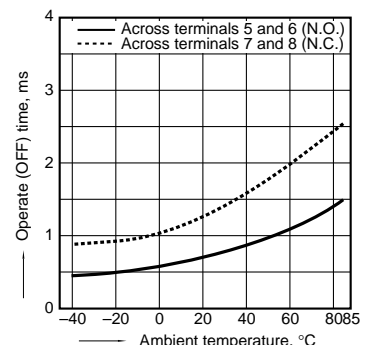

AQW654


4. Reverse (ON) time vs. ambient temperature characteristics

LED current: 5 mA;
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

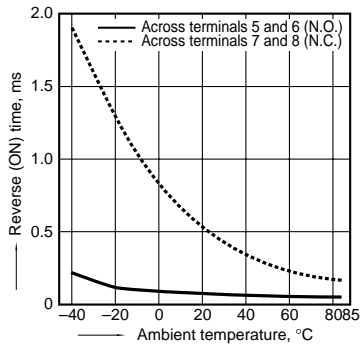


5. LED operate (OFF) current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

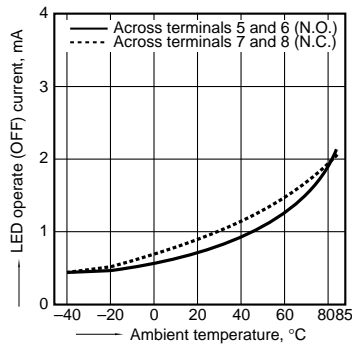


6. LED reverse (ON) current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

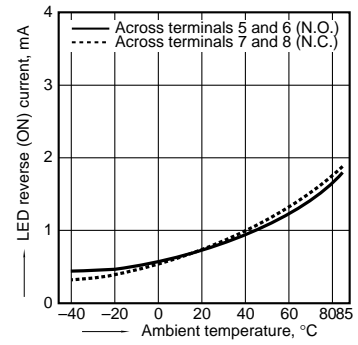


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

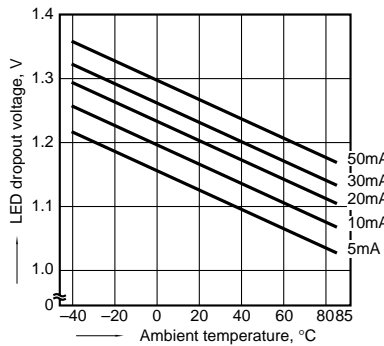


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F




9. Off state leakage current

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

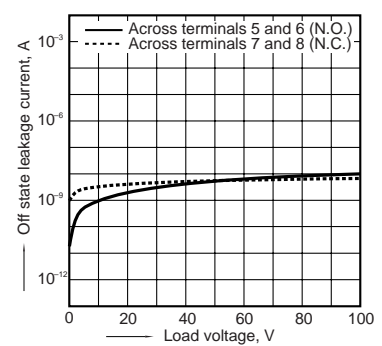


10. LED forward current vs. operate (OFF) time characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

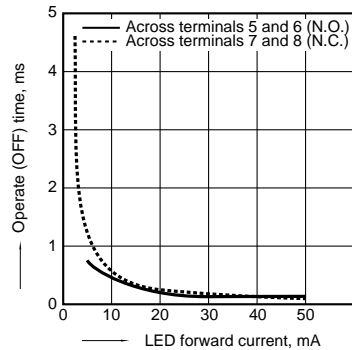

11. LED forward current vs. reverse (ON) time characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F

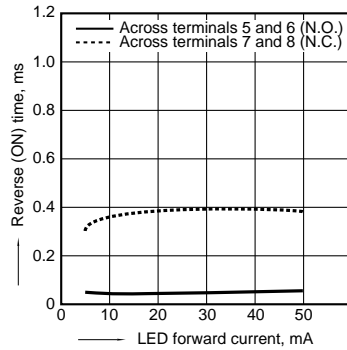

12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

