


# NAiS

## HIGH ELECTRICAL & MECHANICAL NOISE IMMUNITY RELAY

## JQ RELAYS



### FEATURES

- High electrical noise immunity
- High switching capacity in a compact package
- High sensitivity: 200 mW (1a), 400 mW (1c)
- High surge voltage: 8,000 V between contacts and coil
- UL, CSA, VDE, TÜV, SEMKO approved
- Class B coil insulation type available

### SPECIFICATIONS

#### Contact

			Standard type	High capacity type
Arrangement			1 Form A, 1 Form C	
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)			100 mΩ	
Contact material			Silver alloy	
Rating (resistive)	Nominal switching capacity	1a	5 A 125 V AC 2 A 250 V AC 5 A 30 V DC	10 A 125 V AC 5 A 250 V AC 5 A 30 V DC
		N.O.	5 A 125 V AC 2 A 250 V AC 3 A 30 V AC	10 A 125 V AC 5 A 250 V AC 5 A 30 V DC
		1c	2 A 125 V AC 1 A 250 V AC 1 A 30 V DC	3 A 125 V AC 2 A 250 V AC 1 A 30 V DC
	Max. switching power	1a	625 VA, 150 W	1,250 VA, 150 W
		N.O.	625 VA, 90 W	1,250 V AC, 150 W
		N.C.	250 VA, 30 W	500 V AC, 30 W
	Max. switching voltage		250 V AC, 110 V DC (0.3A)	
	Max. switching current		N.O.: 5 A N.C.: 2 A	N.O.: 10 A N.C.: 3 A
	Expected mechanical life (at 180 cpm)(min. operations)		10 <sup>7</sup>	

#### Expected electrical life (min. operations)

Type		Switching capacity	No. of operations
Standard type	1a	5 A 125 V AC 3 A 125 V AC 2 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 2×10 <sup>5</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
		5 A 125 V AC 2 A 250 V AC 3 A 30 V DC	5×10 <sup>4</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
		2 A 125 V AC 1 A 250 V AC 1 A 30 V DC	2×10 <sup>5</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
		10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>
	1c	10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>
		10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>
		3 A 125 V AC 2 A 250 V AC 1 A 30 V DC	2×10 <sup>5</sup> 2×10 <sup>5</sup> 10 <sup>5</sup>
		10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>
		10 A 125 V AC 5 A 250 V AC 5 A 30 V DC	5×10 <sup>4</sup> 5×10 <sup>4</sup> 10 <sup>5</sup>

#### Coil (at 20°C 68°F)

Nominal operating power	1a: 200 mW	1c: 400 mW
-------------------------	------------	------------

#### Characteristics

Max. operating speed	20 cpm
Initial insulation resistance* <sup>1</sup>	Min. 1,000 MΩ at 500 V DC
Initial breakdown voltage* <sup>2</sup>	Between open contacts 1a: 1,000 Vrms for 1 min. 1c: 750 Vrms for 1 min.
	Between contacts and coil 4,000 Vrms for 1 min.
Surge voltage between contact and coil* <sup>3</sup>	8,000 V
Operate time* <sup>4</sup> (at nominal voltage)	Approx. 5 ms
Release time* <sup>4</sup> (at nominal voltage)(without diode)	Approx. 2 ms
Temperature rise* <sup>5</sup>	Max. 45°C
Shock resistance	Functional* <sup>6</sup> Destructive* <sup>7</sup>
	Min. 294 m/s <sup>2</sup> {30 G} Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional* <sup>8</sup>
	98 m/s <sup>2</sup> {10 G}, 10 to 55 Hz at double amplitude of 1.6 mm
Conditions for operation, transport and storage* <sup>9</sup> (Not freezing and condensing at low temperature)	Destructive 117.6 m/s <sup>2</sup> {12 G}, 10 to 55 Hz at double amplitude of 2.0 mm
	Ambient temp.* <sup>10</sup> -40°C to +85°C -40°F to +185°F
Humidity	5 to 85% R.H.
Unit weight	Approx. 7 g .25 oz

#### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*<sup>1</sup> Measurement at same location as "Initial breakdown voltage" section
- \*<sup>2</sup> Detection current: 10 mA
- \*<sup>3</sup> Wave is standard shock voltage of  $\pm 1.2 \times 50\mu s$  according to JEC-212-1981
- \*<sup>4</sup> Excluding contact bounce time
- \*<sup>5</sup> Measured conditions
- Standard type      Resistive, nominal voltage applied to the coil.  
Contact carrying current: 5 A, at 70°C 158°F
- High capacity type      Resistive, nominal voltage applied to the coil.  
Contact carrying current: 10 A, at 70°C 158°F
- \*<sup>6</sup> Half-wave pulse of sine wave: 11ms; detection time: 10μs
- \*<sup>7</sup> Half-wave pulse of sine wave: 6ms
- \*<sup>8</sup> Detection time: 10μs
- \*<sup>9</sup> Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 24).
- \*<sup>10</sup> When using relays in a high ambient temperature, consider the pick-up voltage rise due to the high temperature (a rise of approx. 0.4% V for each 1°C 33.8°F with 20°C 68°F as a reference) and use a coil impressed voltage that is within the maximum allowable voltage range.

## TYPICAL APPLICATIONS

- Air conditioners
- Refrigerators
- Microwave ovens
- Heaters

## ORDERING INFORMATION

Ex. JQ **1a** **P** — **B** — **12** V

Contact arrangement	Contact capacity	Coil insulation class	Coil voltage (DC)
1a: 1 Form A 1: 1 Form C	Nil: Standard P: High capacity	Nil: Class E coil insulation B: Class B coil insulation	5, 6, 9, 12, 18, 24, 48* V

UL/CSA, VDE, SEMKO approved type is standard.

\* Available only for 1 Form C type


## TYPES AND COIL DATA at 20°C 68°F

	Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (min.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA	Nominal operating power, mW	Coil resistance, Ω (±10%)	Max. allowable voltage, V DC
1 Form A	Standard type	JQ1a-5V	5	3.75	40	200	125	180% of nominal voltage (at 20°C 68°F)
		JQ1a-6V	6	4.5	33.3		180	
		JQ1a-9V	9	6.75	22.2		405	
		JQ1a-12V	12	9	16.7		720	
		JQ1a-18V	18	13.5	11.1		1,620	
		JQ1a-24V	24	18	8.3		2,880	
	High capacity type	JQ1aP-5V	5	4	40	200	125	130% of nominal voltage (at 85°C 185°F)
		JQ1aP-6V	6	4.8	33.3		180	
		JQ1aP-9V	9	7.2	22.2		405	
		JQ1aP-12V	12	9.6	16.7		720	
		JQ1aP-18V	18	14.4	11.1		1,620	
		JQ1aP-24V	24	19.2	8.3		2,880	
1 Form C	Standard type	JQ1-5V	5	3.75	80	400	62.5	150% of nominal voltage (at 20°C 68°F)
		JQ1-6V	6	4.5	66.7		90	
		JQ1-9V	9	6.75	44.4		202.5	
		JQ1-12V	12	9	33.3		360	
		JQ1-18V	18	13.5	22.2		810	
		JQ1-24V	24	18	16.7		1,440	
	High capacity type	JQ1-48V	48	36	8.3		5,760	110% of nominal voltage (at 85°C 185°F)
		JQ1P-5V	5	4	80	400	62.5	
		JQ1P-6V	6	4.8	66.7		90	
		JQ1P-9V	9	7.2	44.4		202.5	
		JQ1P-12V	12	9.6	33.3		360	
		JQ1P-18V	18	14.4	22.2		810	


## DIMENSIONS



1 Form A

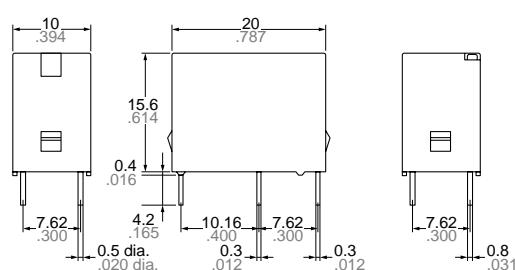


1 Form C

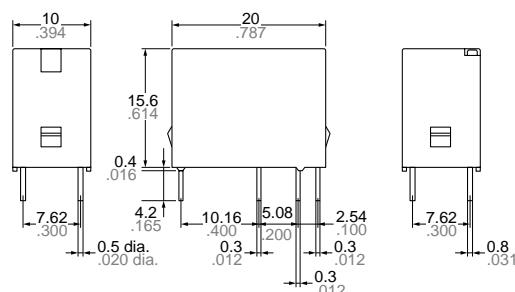


Schematic (Bottom view)

1 Form A




1 Form C




PC board pattern (Copper-side view)

1 Form A



1 Form C

Tolerance:  $\pm 0.1 \pm .004$ Dimension :


Max. 1mm .039 inch  
1 to 5mm .039 to .118 inch  
Min. 5mm .118 inch

General tolerance


$\pm 0.2 \pm .008$   
 $\pm 0.3 \pm .012$   
 $\pm 0.4 \pm .016$

## REFERENCE DATA

Max. switching capacity (1 Form A type)

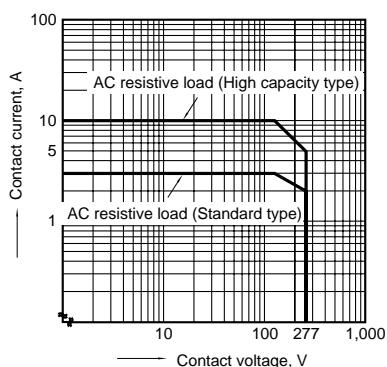

Max. switching capacity (1 Form C type)

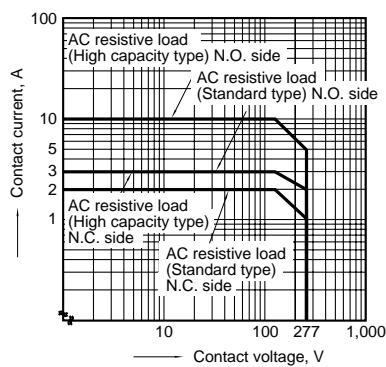**Standard type**

## 1-(1). Operate &amp; release time

(1 Form A type)

Tested sample: JQ1a-12V, 25 pcs.




## 1-(2). Operate &amp; release time

(1 Form C type)

Tested sample: JQ1-24V, 25 pcs.

## 2. Life curve

Ambient temperature: room temperature

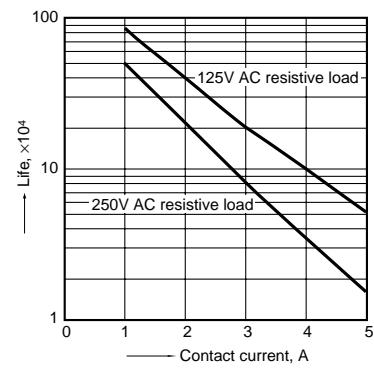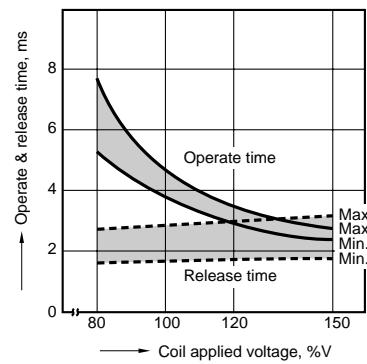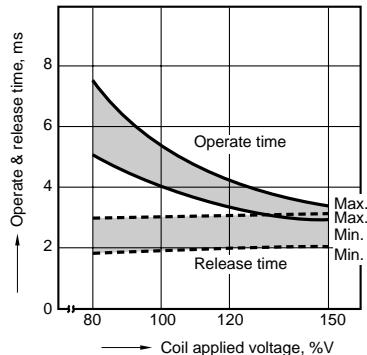


## 3-(1). Coil temperature rise

(1 Form A type)

Contact carrying current: 3 A, 5 A

Measured portion: Inside the coil

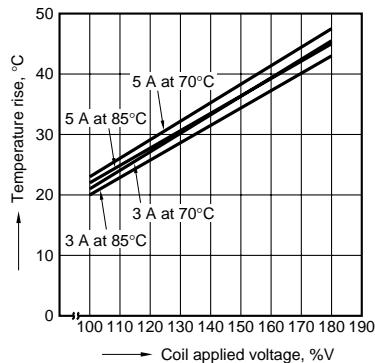


## 3-(2). Coil temperature rise

(1 Form C type)

Contact carrying current: 3 A, 5 A

Measured portion: Inside the coil

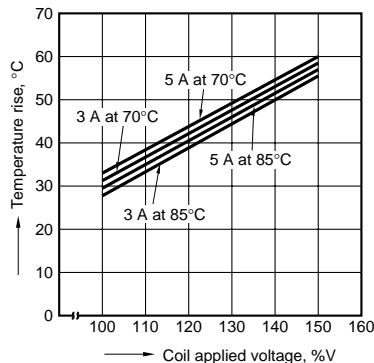


## 4-(1). Ambient temperature characteristics

(1 Form A type)

Tested sample: JQ1a-24V

Contact carrying current: 3 A, 5 A

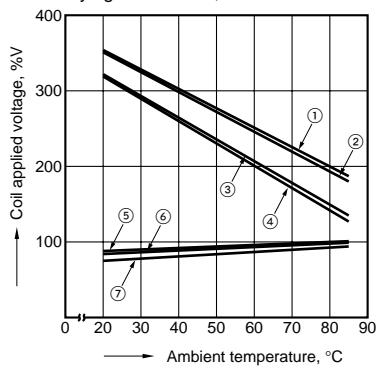


## 4-(2). Ambient temperature characteristics

(1 Form C type)

Tested sample: JQ1-24V

Contact carrying current: 3 A, 5 A

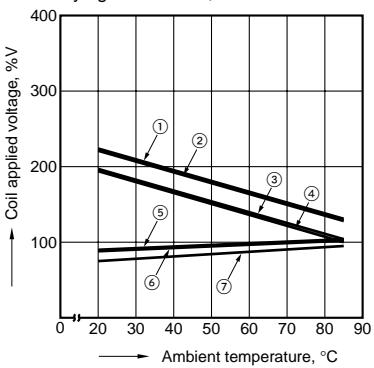

① Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 3 A)

② Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 5 A)

③ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 3 A)

④ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 5 A)

⑤ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 5 A)

⑥ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 3 A)


⑦ Pick-up voltage

## High capacity type

## 1-(1). Operate &amp; release time

(1 Form A type)


Tested sample: JQ1aP-12V, 25 pcs.

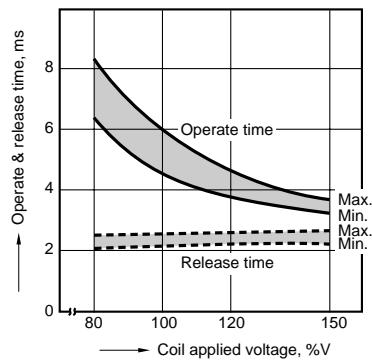

## 1-(2). Operate &amp; release time


(1 Form C type)

Tested sample: JQ1P-12V, 25 pcs.

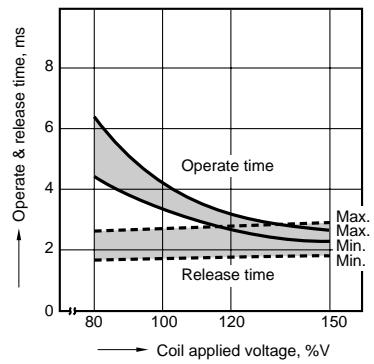

## 2. Life curve

Ambient temperature: room temperature

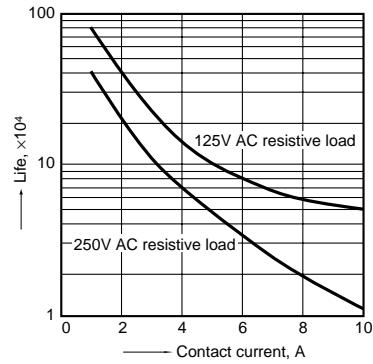


## 3-(1). Coil temperature rise

(1 Form A type)

Contact carrying current: 5 A, 10 A

Measured portion: Inside the coil

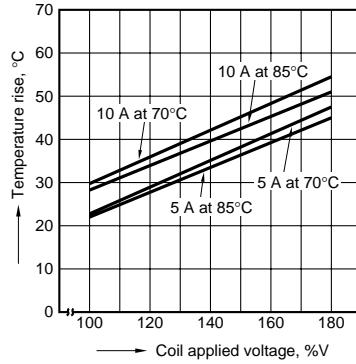


## 3-(2). Coil temperature rise

(1 Form C type)

Contact carrying current: 5 A, 10 A

Measured portion: Inside the coil

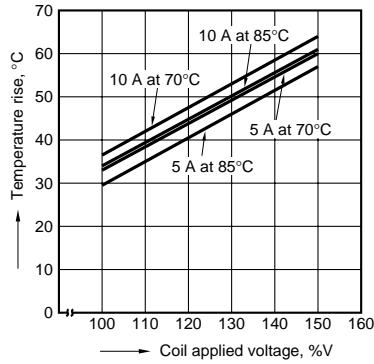


## 4-(1). Ambient temperature characteristics

(1 Form A type)

Tested sample: JQ1aP-24V

Contact carrying current: 5 A, 10 A

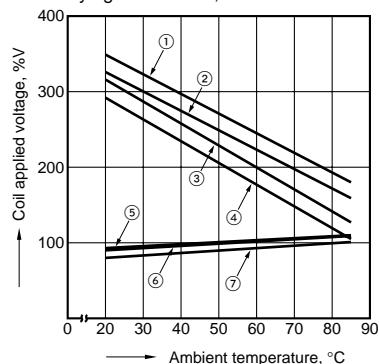


## 4-(2). Ambient temperature characteristics

(1 Form C type)

Tested sample: JQ1P-24V

Contact carrying current: 5 A, 10 A

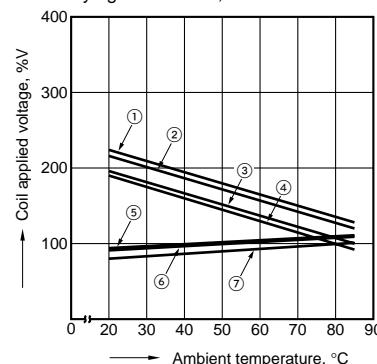

① Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 5 A)

② Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 130°C 266°F) (Carrying current: 10 A)

③ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 5 A)

④ Allowable ambient temperature against % coil voltage (max. inside the coil temperature set as 115°C 239°F) (Carrying current: 10 A)

⑤ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 10 A)

⑥ Pick-up voltage with a hot-start condition of 100%V on the coil (Carrying current: 5 A)

⑦ Pick-up voltage

**For Cautions for Use, see Relay Technical Information (Page 11 to 39).**